





144 Prairie Dust




304 Burnt Barnboard

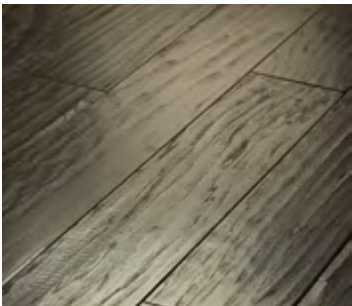

510 Stonehenge

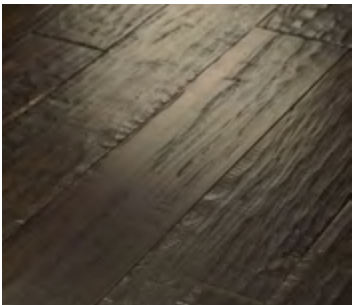

885 Olde English

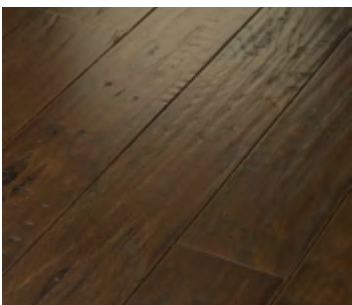

941 Weathered Saddle



879 Warm Sunset

PEBBLE HILL HICKORY



Style Number	SW219
Construction	Epic Plus
Thickness	Nominal 3/8"
Width	5"
Species	Hickory
Texture	Heavy Scraped
Gloss Level	20%
Janka Hardness Rating	2584
Edge Description	Microbeveled
End Description	Microbeveled
SF per carton	23.66
SF per pallet	1,419.60
Installation	Nail, Staple, Glue, Float
Installation Grade	Above, On, Below
Color Variation	High
Radiant Heat Approved	Yes
GREENGUARD Certified	Yes
Warranty	Lifetime

All measurements are nominal. Cartons may include random lengths

Sundry Recommendations

Style #	Style Name	Coverage	Moisture Test	Additional Features
ADHESIVES				
HS105	35MC – Urethane	35 SF / gal for moisture	No moisture test required	Sound control & crack suppressant
		60 SF / gal as adhesive	Up to 5 lbs. or 85% RH	
111SA	3-in-1 Ultra – MS	35 SF / gal for moisture	No moisture test required	Sound control & crack suppressant
		70 SF / gal as adhesive	Up to 5 lbs. or 85% RH	
HS304	DMC140 – Urethane	35 SF / gal for moisture	No moisture test required	
SWADH	UreBond Plus	35 SF / gal for moisture	Up to 8 lbs. or 85% RH	
		60 SF / gal	Up to 5 lbs. or 85% RH	

Trim Pieces – Length: 78" (*Overlap Reducer and Overlap Stairnose are designed for floating installations only. These items are non-stocking – but are available through a quick-ship program. Delivery should take approximately 2 to 3 weeks.)

						
SW920 Flush Reducer	SW921 Overlap Reducer*	SW922 Flush Stairnose	SW923 Overlap Stairnose*	SW924 Threshold / Carpet Reducer	SW925 T-Molding	SW926 Quarter Round



MADE IN THE USA