

tile specifications

style name	shifting gears	
style number	54811	
construction	multi-level pattern loop	
fiber	eco solution q® nylon	
dye method	solution dyed	
	<b>english</b>	<b>metric</b>
.....		
pattern repeat	none	
tufted weight	13	440.77 g/m <sup>2</sup>
gauge	1/10	39.37 per 10 cm
stitches per inch	9	35.43 per 10 cm
finished pile thickness	0.086	2.18 mm
total thickness	0.207	5.26 mm
average density	5442	10.13 kilotex
product size	18" x 36"	45.72 cm x 91.44 cm
primary backing	synthetic	
secondary backing	ecoworx® tile	
protective treatments	ssp protective treatments	


testing

radiant panel	class I
nbs smoke	less than 450
electrostatic propensity	less than 3.5 kv

warranties

lifetime stain, lifetime performance

installation method

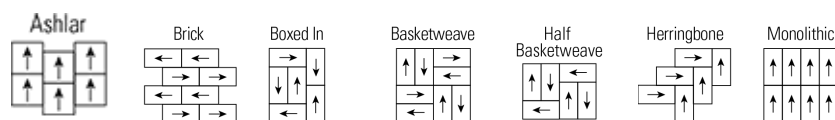

coordinating products

54810 | straight shift

Specifications are subject to nominal manufacturing variances. Material supply and/or manufacturing processes may necessitate specification changes without notice. This carpet is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another carpet design is also strictly prohibited. Visit [phillyqueencommercial.com/Html/PerformanceTesting](http://phillyqueencommercial.com/Html/PerformanceTesting) for more information.