

### tile specifications

style name	straight shift	
style number	54810	
construction	multi-level pattern loop	
fiber	eco solution q® nylon	
dye method	solution dyed	
	<b>english</b>	<b>metric</b>
.....		
pattern repeat	none	
tufted weight	16	542.49 g/m <sup>2</sup>
gauge	1/10	39.37 per 10 cm
stitches per inch	11.2	44.09 per 10 cm
finished pile thickness	0.069	1.75 mm
total thickness	0.208	5.28 mm
average density	8348	15.54 kilotex
product size	18" x 36"	45.72 cm x 91.44 cm
primary backing	synthetic	
secondary backing	ecoworx® tile	
protective treatments	ssp protective treatments	


### testing

radiant panel	class I
nbs smoke	less than 450
electrostatic propensity	less than 3.5 kv

### warranties

lifetime stain, lifetime performance

### installation method

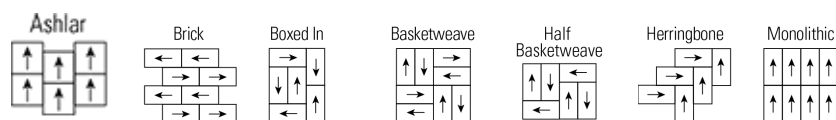

### coordinating products

54811 | shifting gears

Specifications are subject to nominal manufacturing variances. Material supply and/or manufacturing processes may necessitate specification changes without notice. This carpet is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another carpet design is also strictly prohibited. Visit [phillyqueencommercial.com/Html/PerformanceTesting](http://phillyqueencommercial.com/Html/PerformanceTesting) for more information.