


# Elevation™

## Electric 1250

### Technical Specifications

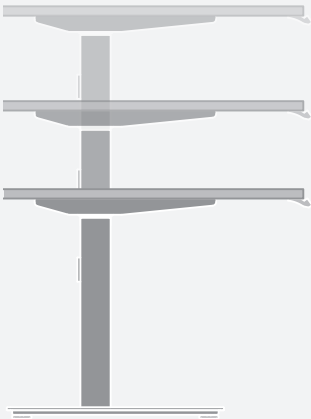

# Elevation™


## Electric 1250

### Contents




3. Frame Styles
11. Electric Height Adjustable - Impact Stop
12. Cable Management
14. Height Adjustable PET Screen
15. H-Frame - Fixed Screen Brackets
16. Single Sided - Universal Fixed Screen Brackets
17. Finishes


# Elevation™ Electric 1250 Frame Styles




E2S - 1000  
Single Sided - Rectangle Frame

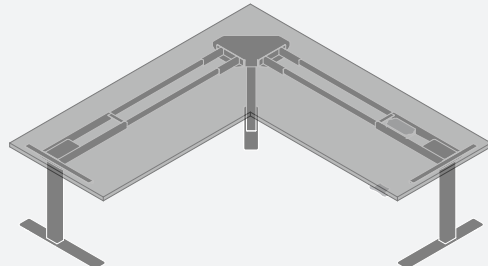


E2S - 1090  
Single Sided - 90° Frame

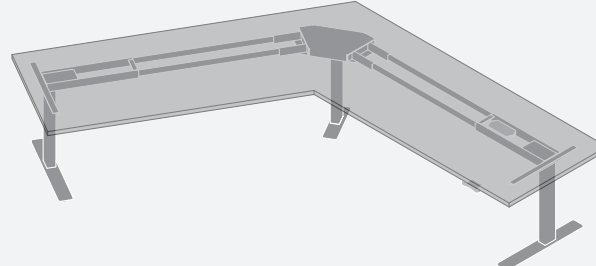


E2S - 1120  
Single Sided - 120° Frame

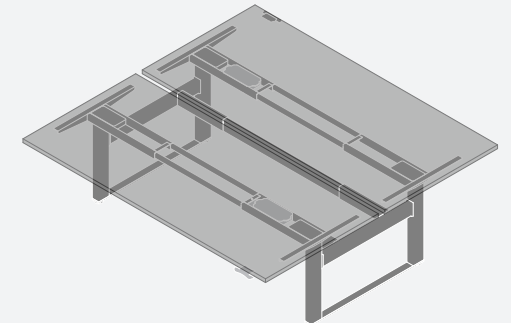


E2S - 2000  
2pax B2B - H-Frame

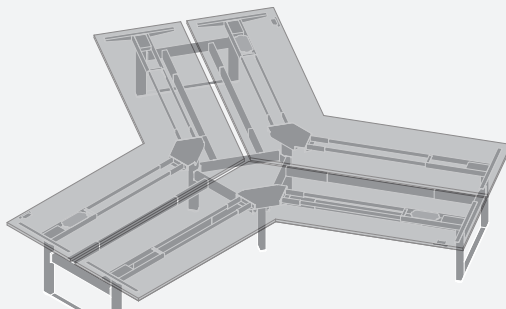

E2S - 3000  
3pax B2B - 120° H-Frame

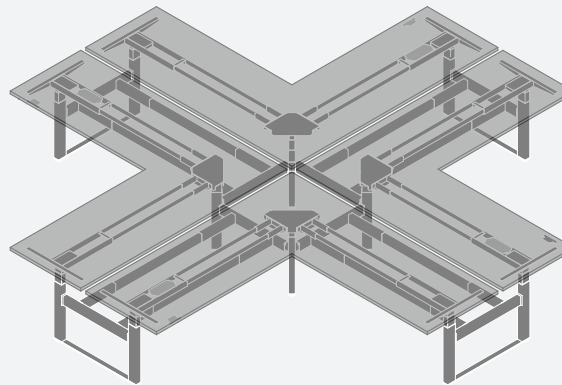

E2S - 4000  
4pax B2B - 90° H-Frame


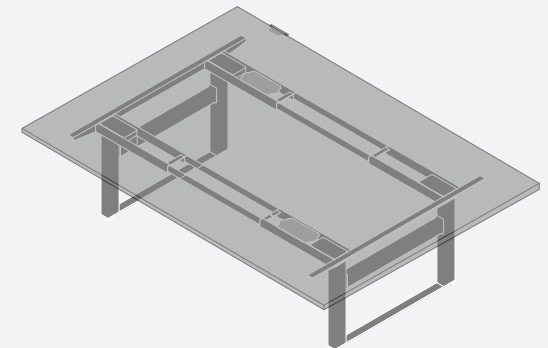


E2S - 1050  
Rectangle Meeting Table

# Elevation™

## Electric 1250

### E2S-1000 - Sit to Stand - Single Sided - Rectangle Frame

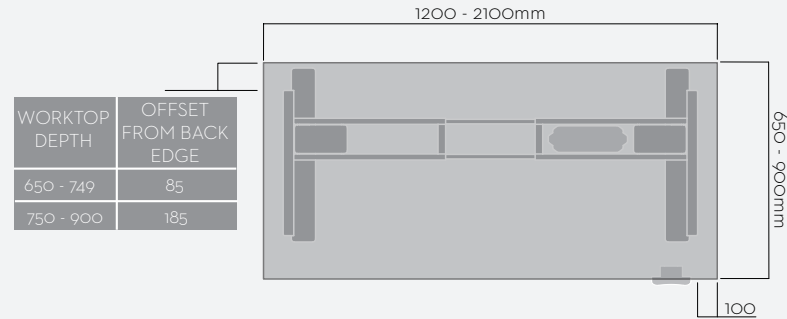

#### Specifications

Height Range: 600 to 1250 to underside of worktop

Travel Speed: 35mm/second



Glide Adjustment: Plus or minus 5mm

Weight Capacity: 100.0kg evenly distributed load (including worktop)  
Maximum point load 30kg

Handset: 4 programmable height settings with electronic display

Optional cross beam available




	Finish	Material
Feet:	White / Silver / Black	Steel
Leg	White / Silver / Black	Steel
Rail:	White / Silver / Black	Steel

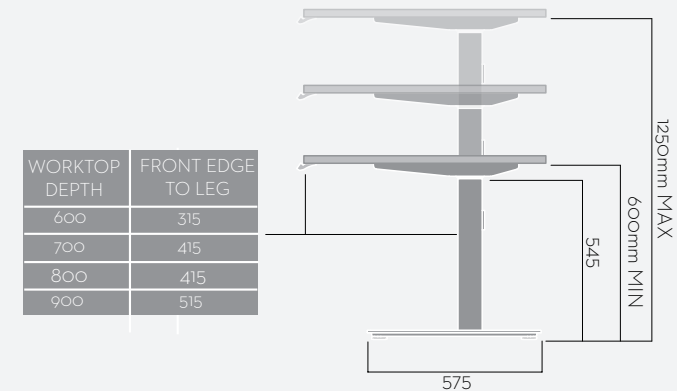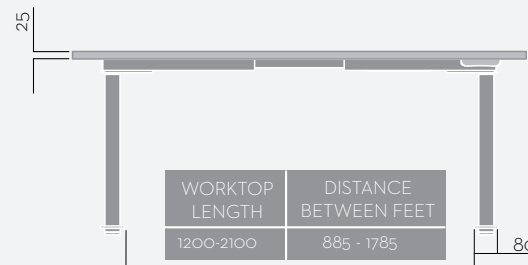

# Elevation™

## Electric 1250

### E2S-1090 - Sit to Stand - Single Sided - 90° Frame

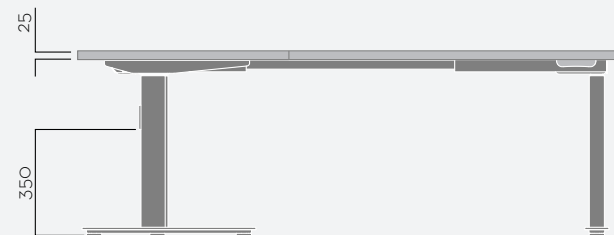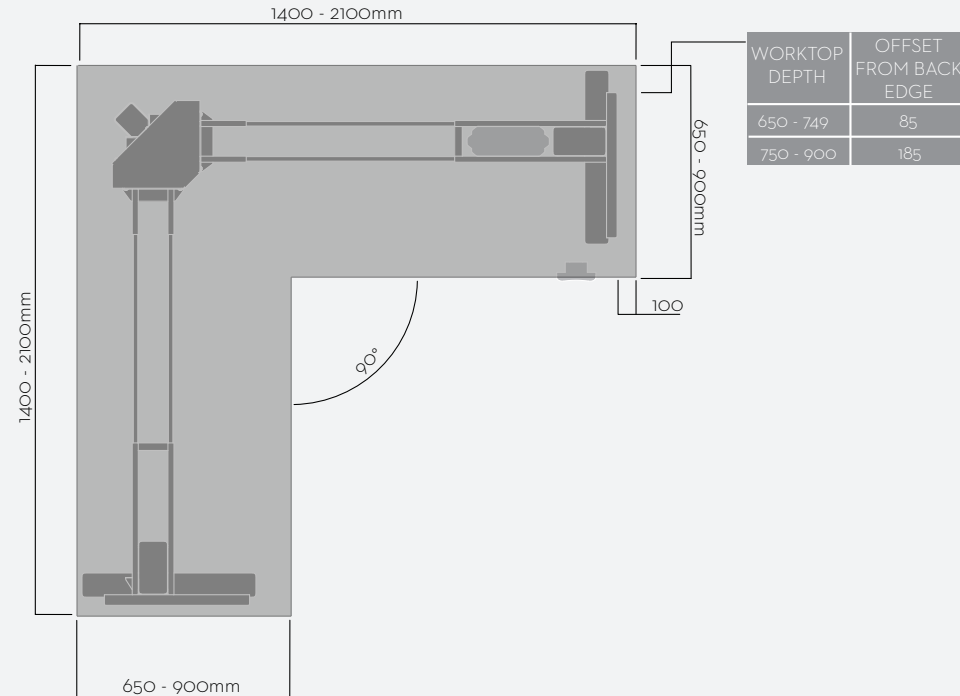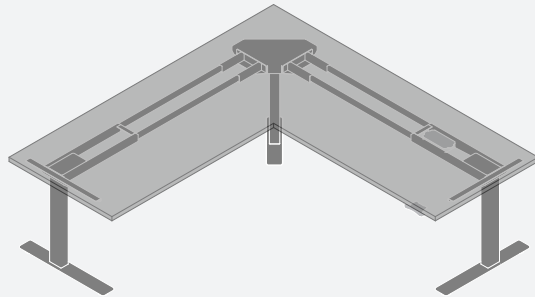

#### Specifications

Height Range: 600 to 1250 to underside of worktop

Travel Speed: 35mm/second

Glide Adjustment: Plus or minus 5mm

Weight Capacity: 150.0kg evenly distributed load (including worktop)  
Maximum point load 30kg

Handset: 4 programmable height settings with electronic display

Optional cross beam available for worktops 1400-1800mm



Cross beam required for worktops 1801-2100mm

	Finish	Material
Feet:	White / Silver / Black	Steel
Leg	White / Silver / Black	Steel
Rail:	White / Silver / Black	Steel

# Elevation™

## Electric 1250

### E2S-1120 - Sit to Stand - Single Sided - 120° Frame

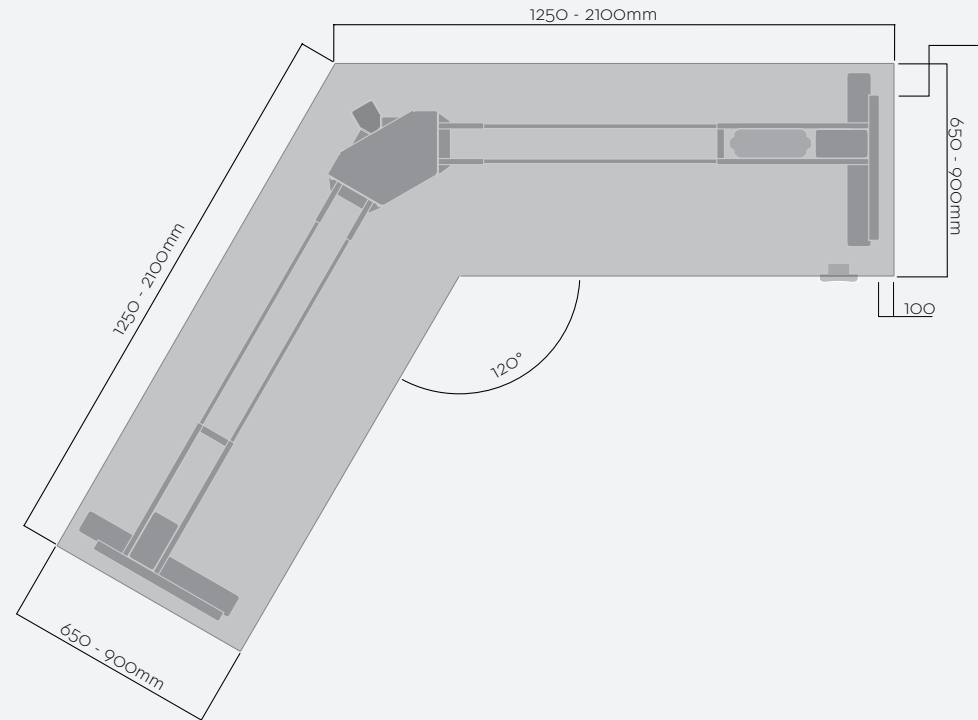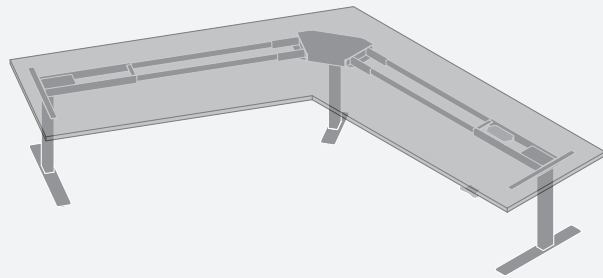

WORKTOP DEPTH	OFFSET FROM BACK EDGE
650 - 749	85
750 - 900	185

#### Specifications

Height Range: 600 to 1250 to underside of worktop

Travel Speed: 35mm/second

Glide Adjustment: Plus or minus 5mm


Weight Capacity: 150.0kg evenly distributed load (including worktop)  
Maximum point load 30kg

Handset: 4 programmable height settings with electronic display

Optional cross beam available for worktops 1250-1800mm

Cross beam required for worktops 1801-2100mm



	Finish	Material
Feet:	White / Silver / Black	Steel
Leg	White / Silver / Black	Steel
Rail:	White / Silver / Black	Steel

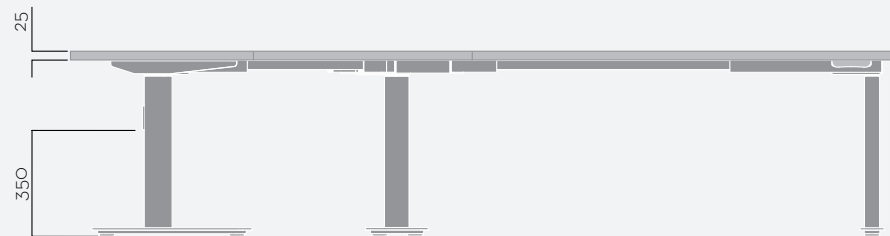

# Elevation™

## Electric 1250

### E2S-1050 - Sit to Stand - Rectangle Meeting Table

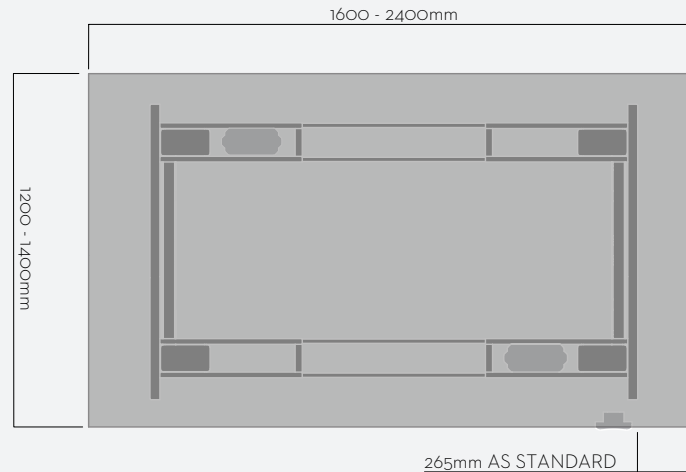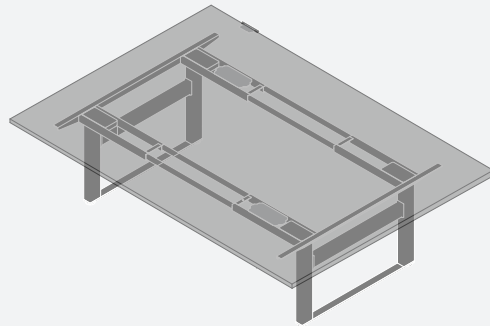

#### Specifications

Height Range: 600 to 1250 to underside of worktop


Travel Speed: 35mm/second

Glide Adjustment: Plus or minus 5mm

Weight Capacity: 150.0kg evenly distributed load (including worktop)  
Maximum point load 30kg

Handset: 4 programmable height settings with electronic display



	Finish	Material
Feet:	White / Silver / Black	Steel
Leg	White / Silver / Black	Steel

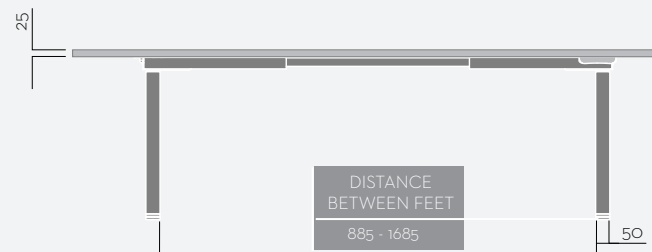

# Elevation™

## Electric 1250


### E2S-2000 - Sit to Stand - 2pax B2B - Rectangle H-Frame

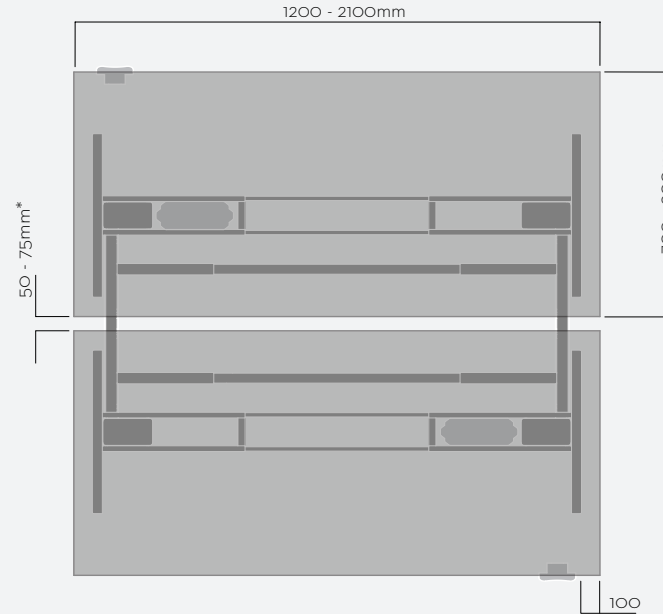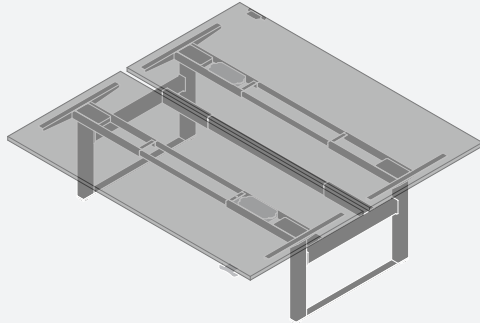

#### Specifications

- Height Range: 600 to 1250 to underside of worktop
- Travel Speed: 35mm/second
- Glide Adjustment: Plus or minus 5mm
- Weight Capacity: 100.0kg evenly distributed load (including worktop) per workpoint  
Maximum point load 30kg
- Handset: 4 programmable height settings with electronic display

\*Worktop gap can be adjusted depending on thickness of screen

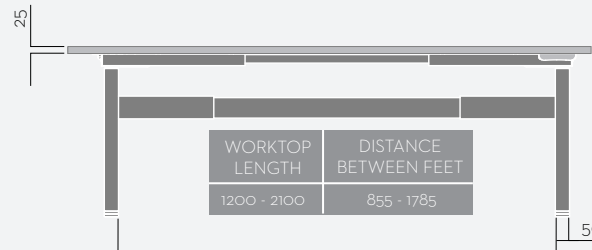



	Finish	Material
Feet:	White / Silver / Black	Steel
Leg	White / Silver / Black	Steel
Rail:	White / Silver / Black	Steel



# Elevation™

Electric 1250

E2S-3000 - Sit to Stand - 3pax B2B - 120° H-Frame

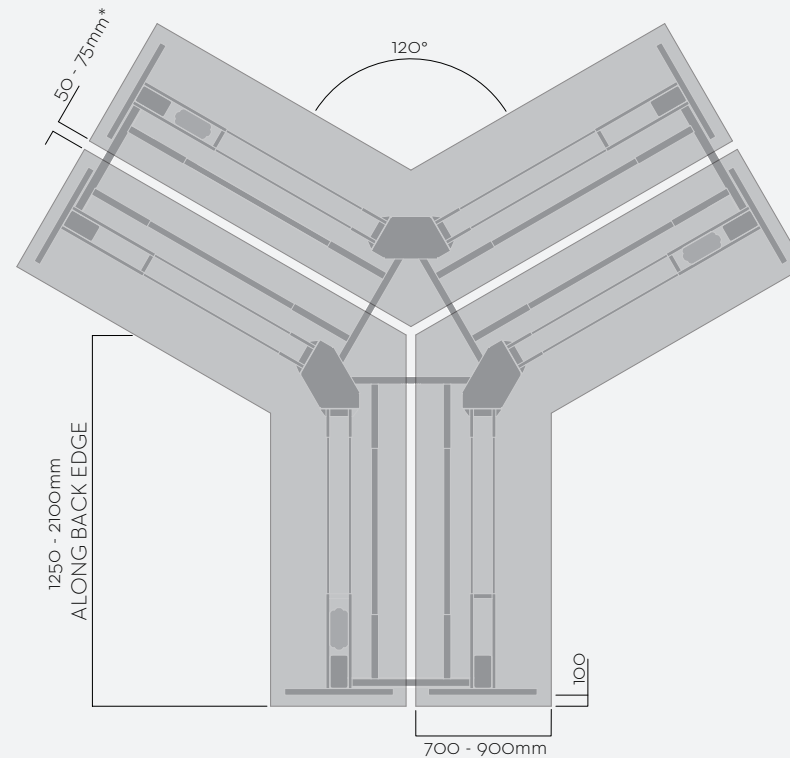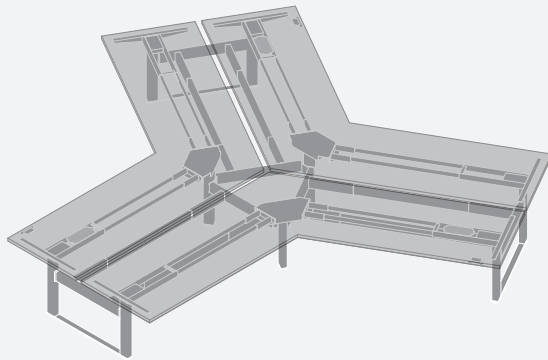

## Specifications

Height Range: 600 to 1250 to underside of worktop

Travel Speed: 35mm/second

Glide Adjustment: Plus or minus 5mm


Weight Capacity: 150.0kg evenly distributed load (including worktop) per workpoint

Maximum point load 30kg

Handset: 4 programmable height settings with electronic display

\*Worktop gap can be adjusted depending on thickness of screen



	Finish	Material
Feet:	White / Silver / Black	Steel
Leg	White / Silver / Black	Steel

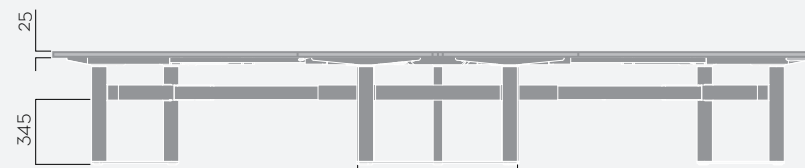

# Elevation™

Electric 1250

E2S-4000 - Sit to Stand - 4pax B2B - 90° H-Frame

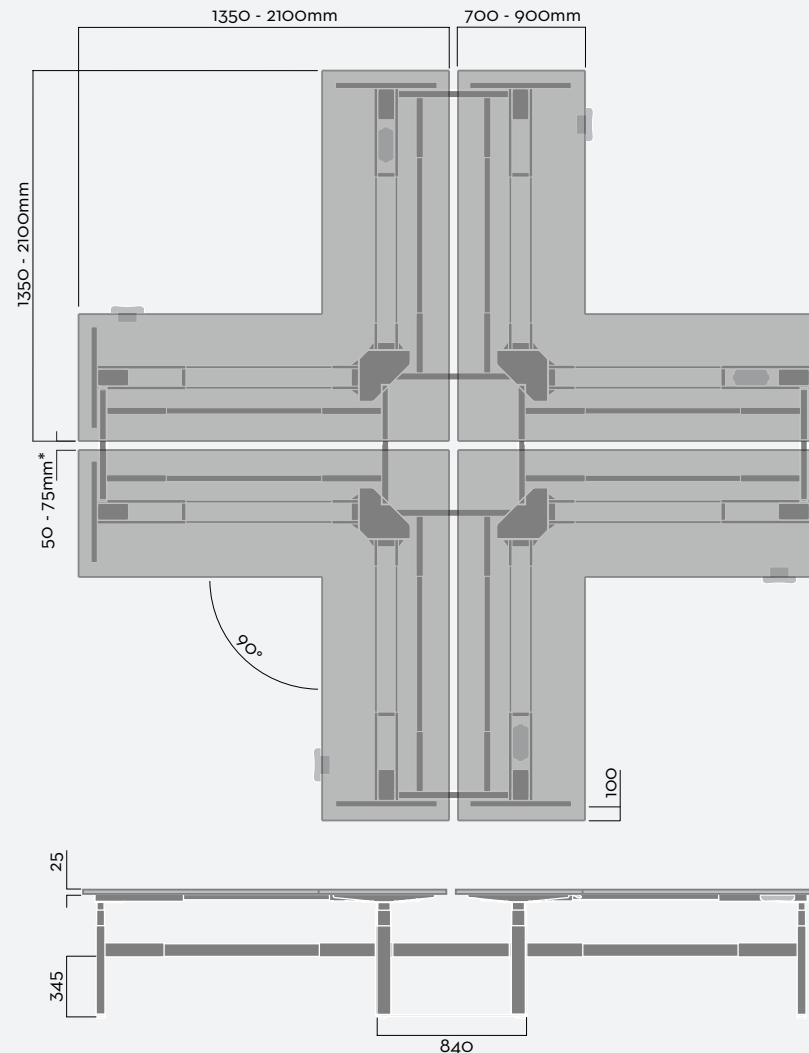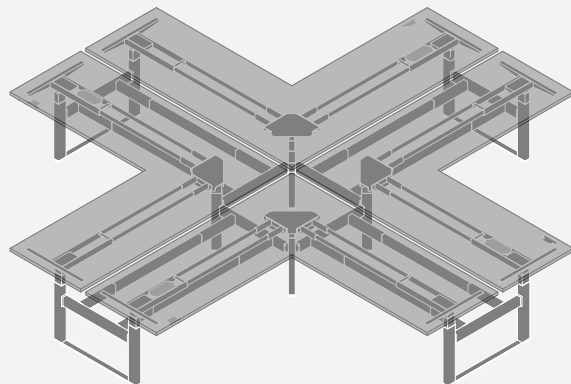

## Specifications

Height Range: 600 to 1250 to underside of worktop

Travel Speed: 35mm/second

Glide Adjustment: Plus or minus 5mm

Weight Capacity: 150.0kg evenly distributed load (including worktop) per workpoint

Maximum point load 30kg

Handset: 4 programmable height settings with electronic display




\*Worktop gap can be adjusted depending on thickness of screen

	Finish	Material
Feet:	White / Silver / Black	Steel
Leg	White / Silver / Black	Steel

# Elevation™

Electric 1250

Electric Height Adjustable Styles - Impact Stop

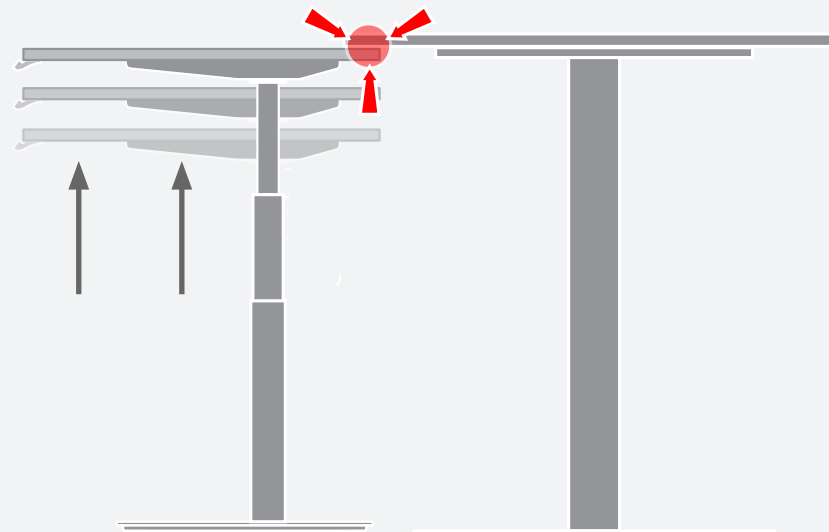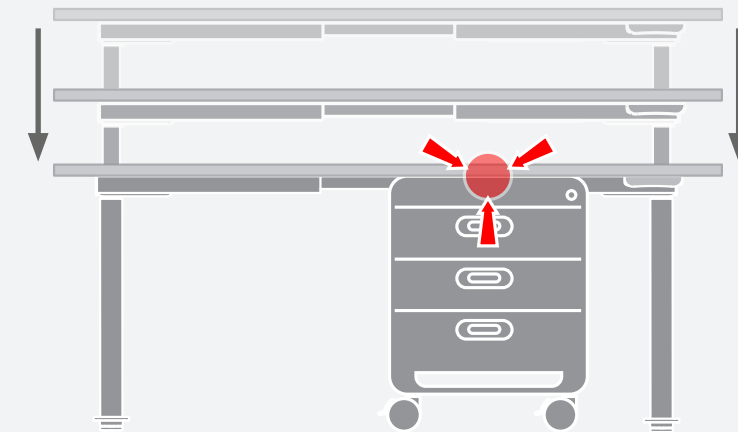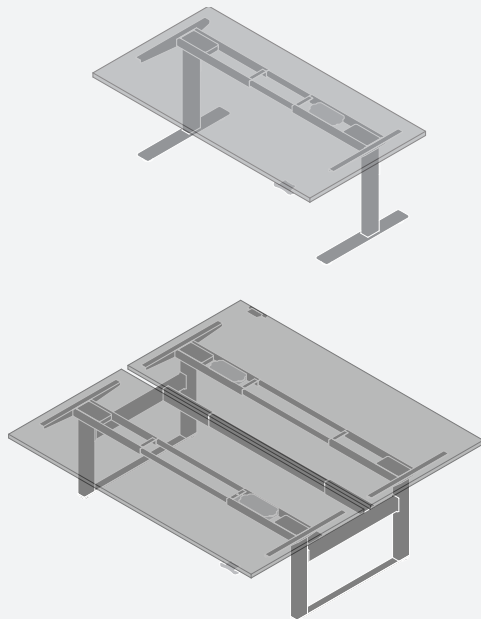

## Specifications



- 1 Impact Stop system minimises damage to Electric Height Adjustable frames from contact with objects obstructing the path of movement
- 2 Impact Stop initiates while frame is lowering or raising, when 1 second of resistance from an obstruction is detected
- 3 When resistance is detected, desk will automatically stop then move 50mm in opposite direction in order to clear obstruction.

# Elevation™



## Electric 1250

### Cable Management



Single Sided Frame - Cross Beam Mounted  
Single Sided Segregated Cable Basket with cross beam mount brackets

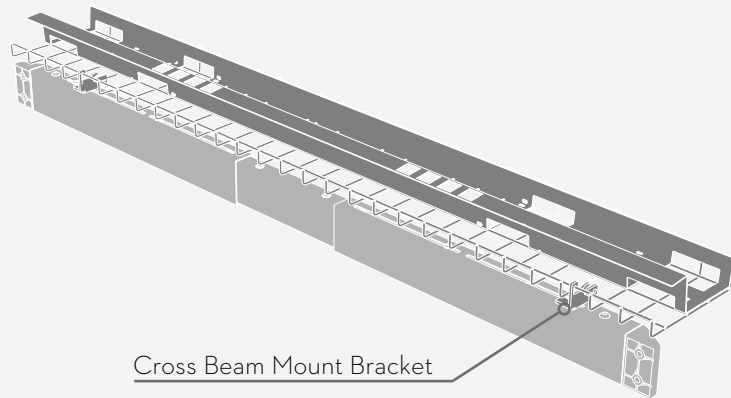

Single Sided Frame - Worktop Mounted  
Single Sided Segregated Cable Basket with worktop mount bracket

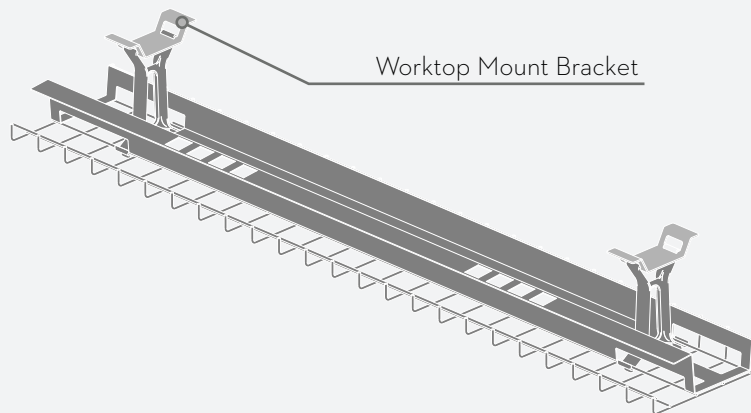

H-Frame - Cross Beam Mounted  
Double Sided Segregated Cable Basket with Adaptor Straps

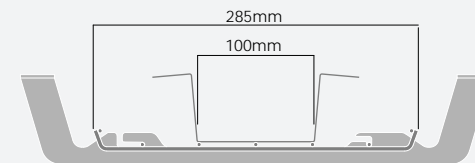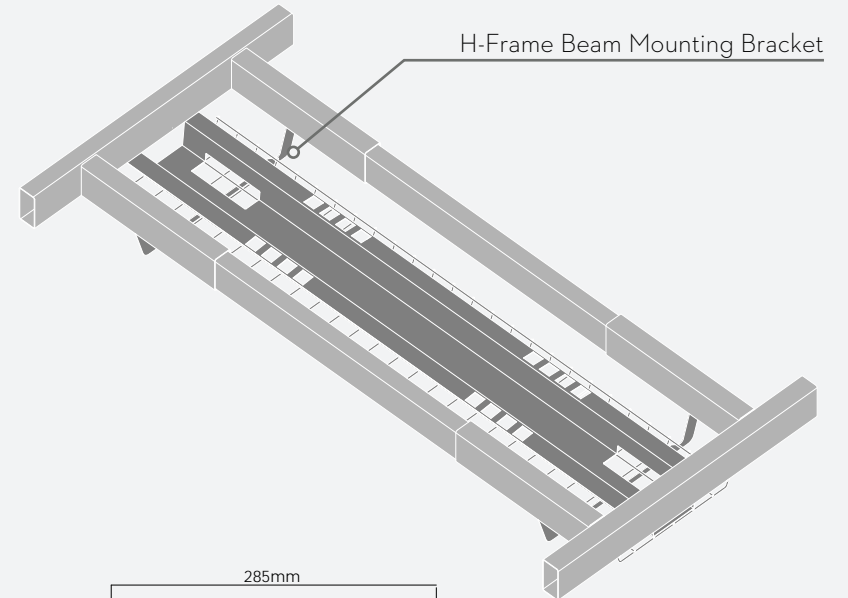


	Finish	Material
Gutter:	Matte Black	Steel Wire
Segregation:	Matte Black	Steel
Bracket:	Matte Black	Steel

# Elevation™




## Electric 1250

### Cable Management



Cable Basket Umbilical






Umbilical Capacity  
4 x 12mm 20amp Power Cable  
12 x 6mm Cat 5 and 6 data Cable

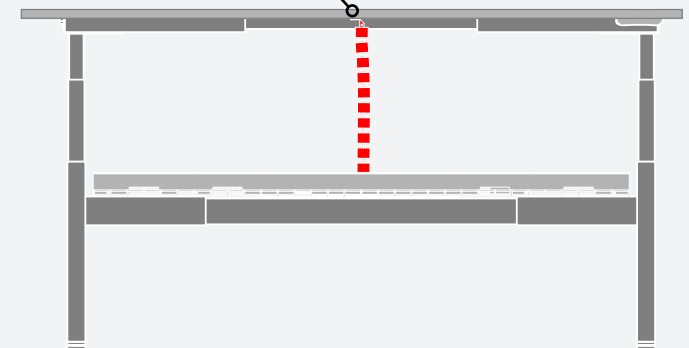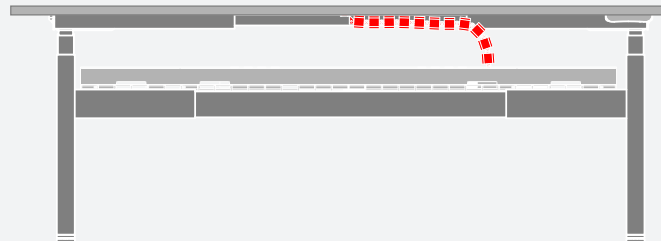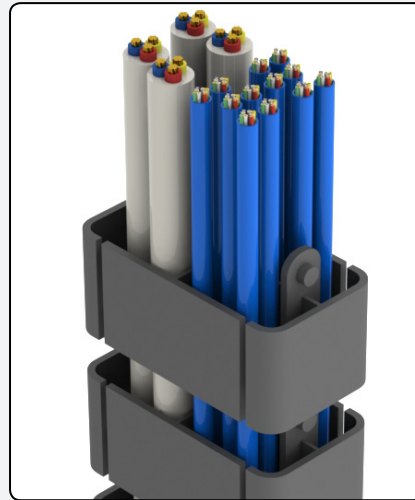

# Elevation™

## Electric 1250

### Height Adjustable PET Screen

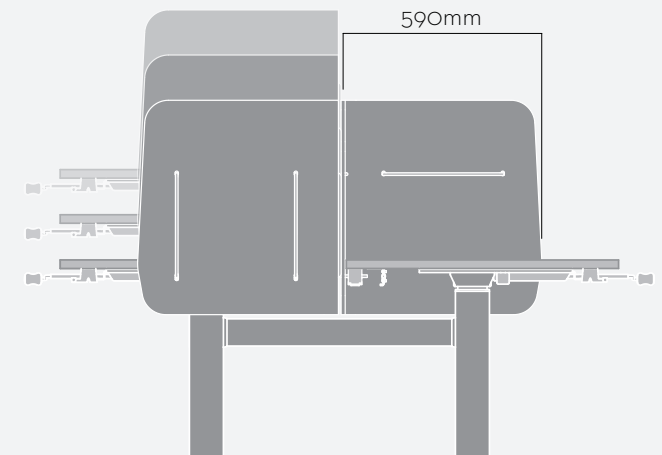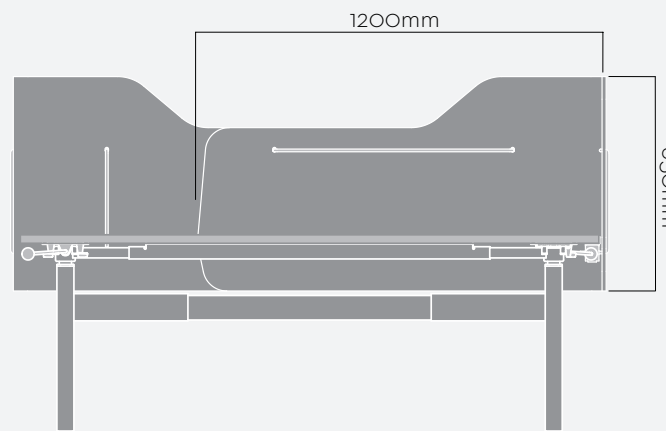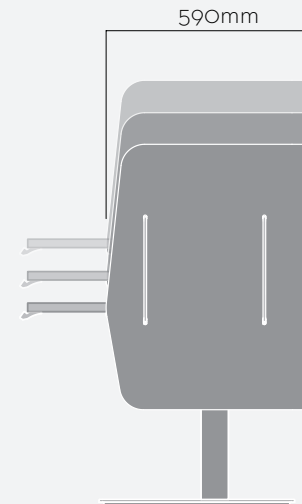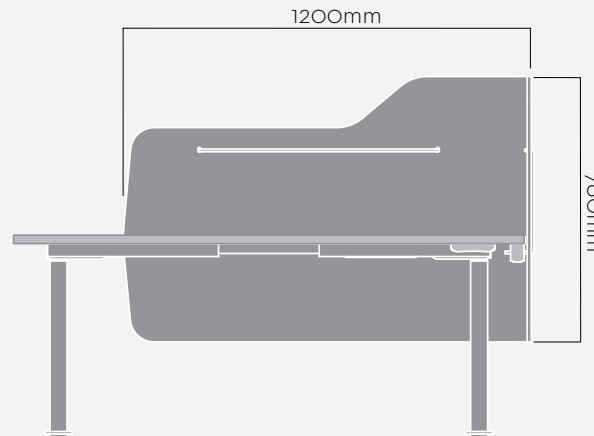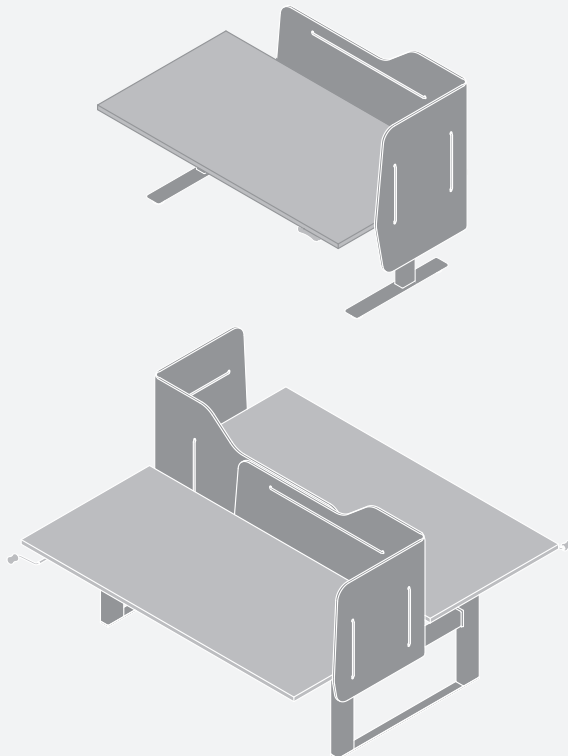

#### Specifications




- ① To suit both Mechanical Height Adjustable and Electric Height Adjustable styles
- ② 780mmH Screen available to suit Single Sided Frames
- ③ 630mmH Screen available to suit H-Frame bases
- ④ Can be positioned left or right-hand side of workpoint

	Finish	Material
Screen:	Light / Dark Grey	PET Panel
Screen Frame:	Light / Dark Grey	Steel Rod

# Elevation™

## Electric 1250

### H-Frame - Fixed Height Screen Brackets

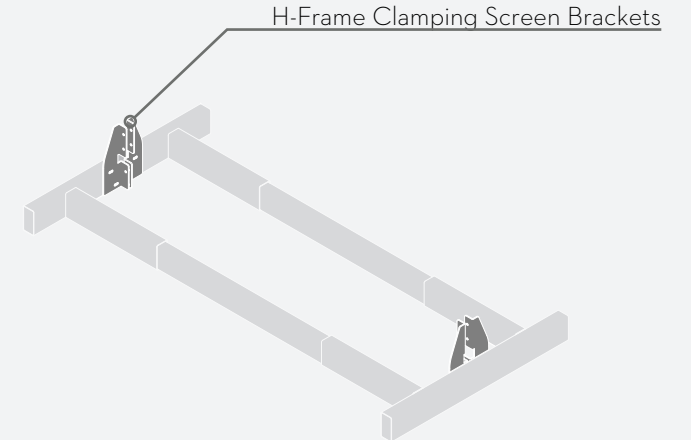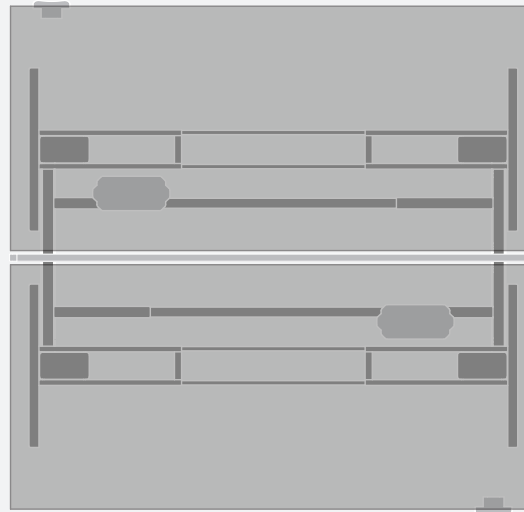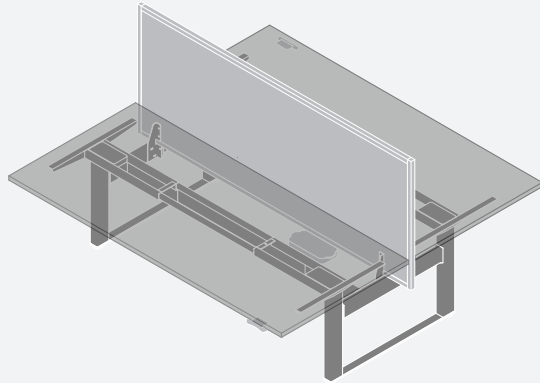


#### Specifications


- ① To suit both Mechanical Height Adjustable and Electric Height Adjustable H-frame bases
  - ② Standard screen mounting pattern suitable for solidcore screens
- \*Ensure screen is specified to be 30mm longer than worktop length to allow for finger clearance for side-by-side clusters

Screen:	Finish As specified	Material Solid Core
---------	------------------------	------------------------

WORKTOP LENGTH = SCREEN LENGTH MINUS 30mm\*

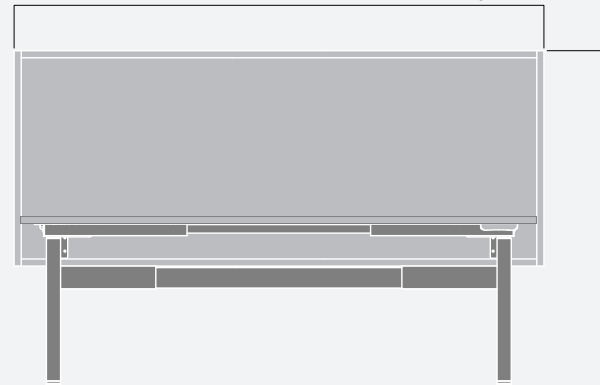




MAXIMUM 1200mm FFL

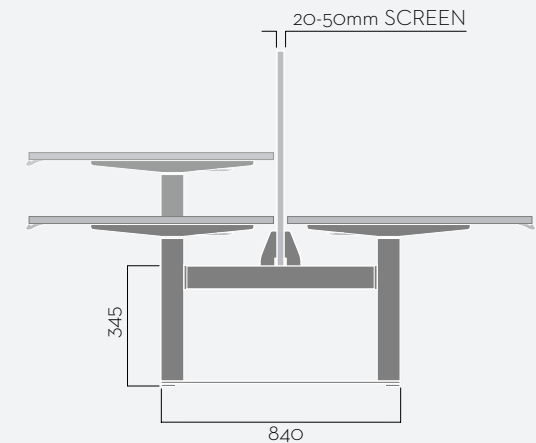

# Elevation™

Electric 1250

Single Sided - Universal Fixed Height Screen Brackets

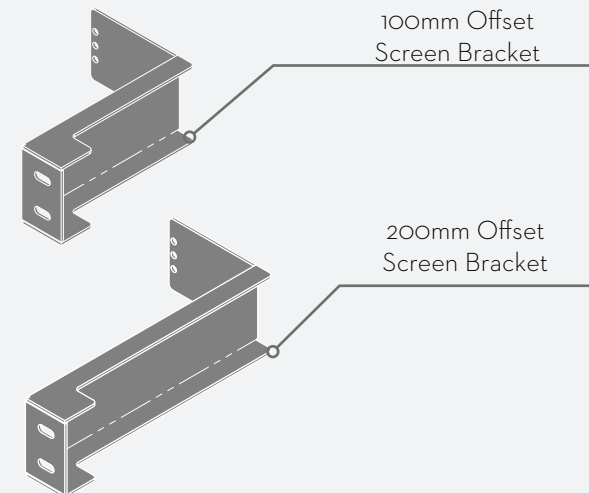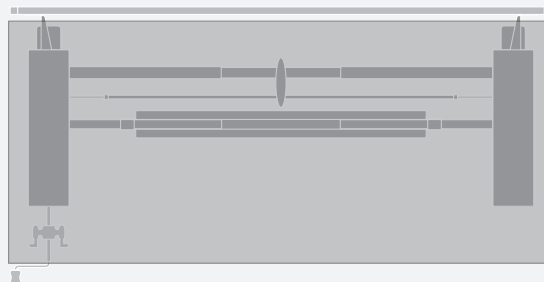
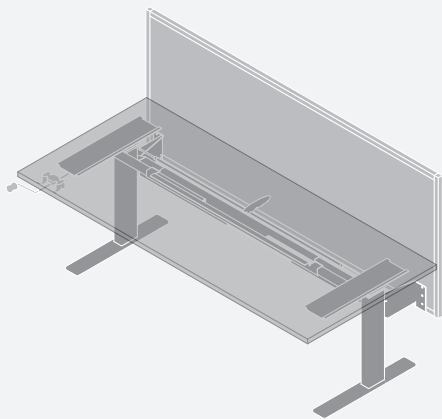


## Specifications

- ① To suit both Mechanical and Electric Height Adjustable Single Sided frames
- ② Brackets available for 300mm suspended screens and floor level screens
- ③ Standard screen mounting pattern suitable for solidcore screens

\*For side-by-side configurations, screen length must be adjusted to suit 30mm between workpoints

Screen:	Finish	Material
Bracket:	As specified	Solid Core
	Powdercoat to match frame	Steel

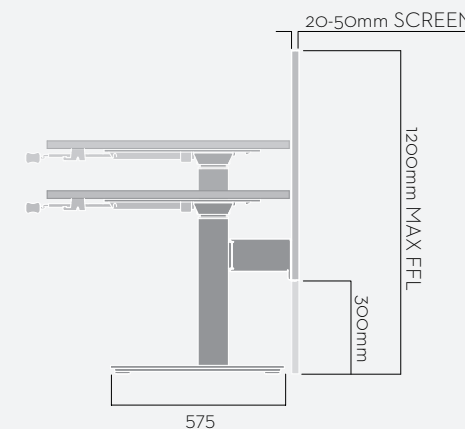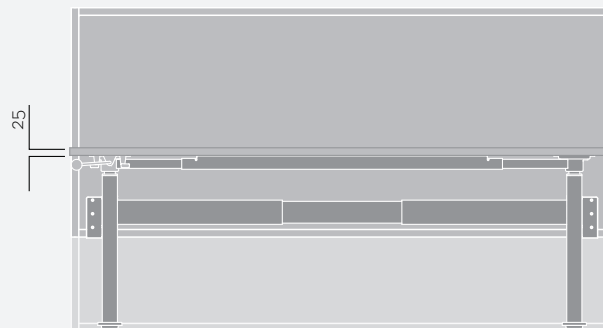



# Elevation™ Electric 1250 Finishes

