

Receivers


MR360

Specifications	012-MR360M - magnetic or 012-MR360C -Clamp
Accuracy fine	+/-3mm to +/-12mm
Accuracy course	+/-5mm to +/-25mm
Rechargeable Batteries	7.2v NiMh
Operating time	40hr
Charge time	10hr
Operating temp	-20°C to +50°C
Pick-up length	250mm
In-cab display	with 8m cable
Waterproof, Dust proof	IP66

MACHINE CONTROL RECEIVER

The optimum in time saving for all grader, dozer, bobcat or scraper operations. Full 360° reception and in-cab display for easy construction and site preparation.

- 360° reception range
- Magnetic or screw clamp
- In-cab display with 8m of cable
- Large 250mm pick-up board
- Fits to all machines and detects from all red beam lasers

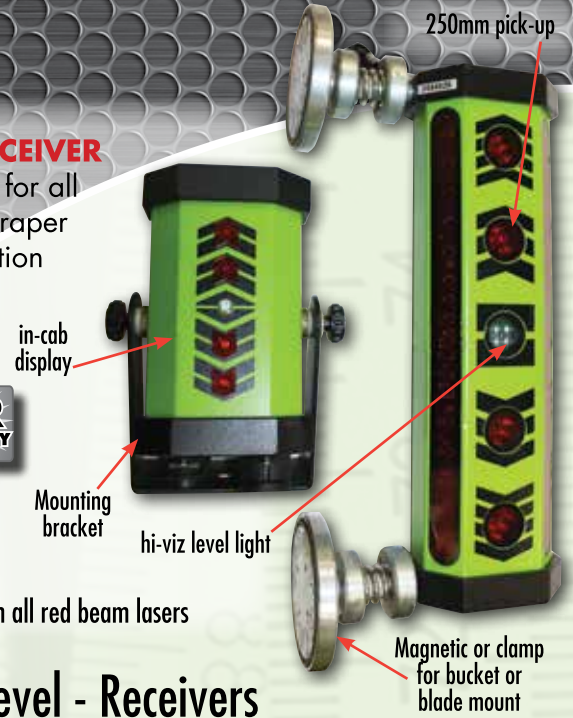

LR1 RED BEAM Rotating Laser Level - Receivers



- Standard on 77R, 88R or 99DG
 - Dual face front rear 35mm pick-up
 - Heavy duty IP67 rubber sleath protection
 - Top magnet for mounting to ceiling grid
 - Course and fine setting options
 - 2 sound options
 - Includes bracket to fit all staffs
 - Standard on 88G green beam
- 012-IOLR1-red
012-IOLG1-green

LRZ100 RED/ GREEN BEAM



- mm display to +/-45mm
 - Large 130mm reception window
 - 3 accuracy settings 1mm, 5mm or 9mm
 - Dual faced LCD
 - Compatible with red or green beam lasers
 - Includes bracket to suit all staffs
- 012-LRZ100

LD2 RED BEAM Line Laser - Receivers



- Line laser detector to suit LX25P, LX22, LX33 or LX55
 - Large 35mm pick-up
 - Highly visible LCD
 - 2 sound options
 - Use up to 50m outdoors
- 012-IOLD2

LAR28 - LAR32

Combining an all metal, fully sealed housing for all weather protection and high magnification. IMEX LAR 28 and LAR32 are the most robust auto-levels available.

A magnetic damping compensator ensures better stability and reliability in all conditions.

- Metal, fully sealed housing
- Magnetic damping compensator
- 28x or 32x magnification



Specifications	012-IOLAR28	012-IOLAR32
Standard deviation 1km double run	1.5mm	1.0mm
Magnification	28x	32x
Horizontal circle	360° graduations	360° graduations
Compensator	Magnetic Damping	Magnetic Damping
Objective Aperture	34mm	34mm
Weight	1.8kg	1.8kg

