
# Pomona®

## Model 2451 BNC Female Panel Receptacle

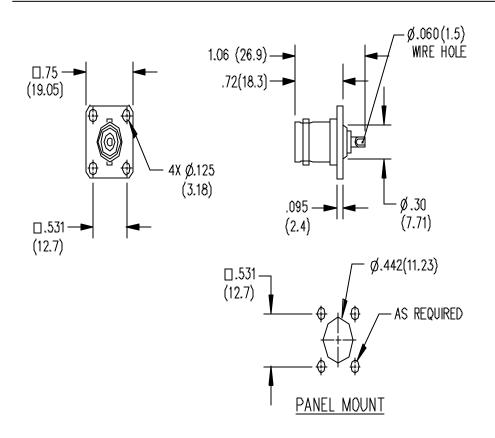

#### **MATERIALS:**

Body and Fittings: Brass, Tarnish Resistant Plating Center Contact: Gold Plated Beryllium Copper

Dielectric: PTFE

Finish: Body and Fittings: Tarnish Resistant

Center Contact: Gold Plated

### **RATING:**

Nominal Impedance: 50 Ohms

Operating Temperature: -65°C to +165°C

**ORDERING INFORMATION**: Model 2451

All dimensions are in inches. Tolerances (except noted):  $.xx = \pm .02$ " (,51 mm),  $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

6/9/99 SY/EH/LS Sales: 909-469-2900 Fax: 909-629-3317 Technical Assistance: 800-241-2060 Pomona*ACCESS* **90157** (800) 444-6785 or (949) 253-3858 More drawings available at www.pomonaelectronics.com

S:\Engineering\Release\DataSheets\FlukeDataSheet\d2451\_1\_01.doc

### **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pomona: