
Pomona®

Model 2455 Connector Type N (F) Panel Receptacle

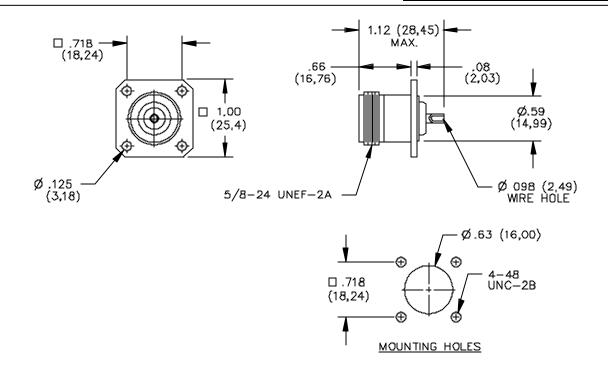

MATERIALS:

Body: Gold Plated Brass Center Contact: Gold Plated Beryllium Copper Dielectric: PTFE

Finish:

Body: Tarnish Resistant Center Contact: Gold Plated

RATINGS:

Operating Temperature: -65°C (-85°F) to +165°C (+329°F) Operating Voltage: 1000 VRMS Nominal Impedance: 50 Ohms

ORDERING INFORMATION: Model 2455

All dimensions are in inches. Tolerances (except noted): $.xx = \pm.02^{\circ}$ (,51 mm), $.xxx = \pm.005^{\circ}$ (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

6/9/99	Sales: 800-490-2361 Fax: 888-403-3360
SY/EH/LS	Technical Assistance: 800-241-2060
S:\Engineering\Release\DataSheets\FlukeDataSheet\d2455 1 01.doc	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pomona: 2455