
Pomona®

Model 2BA & 2BC Double Banana Plug Both Ends Cable Assembly

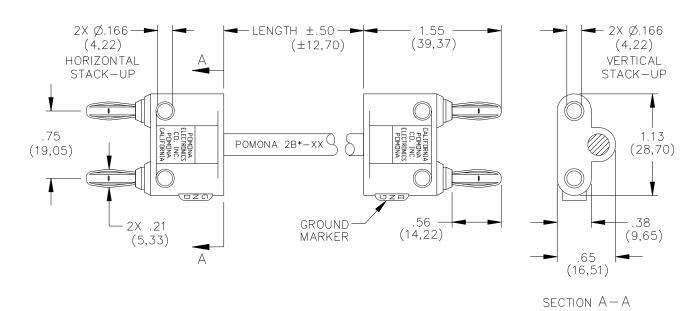

* = Cable MATERIALS:

Banana Plugs:

Plug Bodies: Brass, Nickel Plated
 Springs: Beryllium Copper, Nickel Plated
 Insulation: Polypropylene Molded to the Plug Bodies and Cable. Color Matches Color of Cable
 Marking: POMONA ELECTRONICS CO. INC. POMONA CALIFORNIA
 Cable: 2BA: 2 Cond. Tw. 18 AWG 65 x 36 .250 (6,4) O.D., Color: Gray, Marking: 2BA-XX

2BC: RG58C/U, .195 (5,0) O.D., Color: Black, Marking: 2BC-XX

RATINGS:

Operating Temperature: +55°C Max. Operating Voltage: 2BA – 300 VRMS, 2BC – 1400 VRMS

ORDERING INFORMATION: Model 2BA-XX

XX = Cable Length, Standard Lengths: 18" (457,2cm), 24" (60,96cm), 36" (91,44cm), 48" (121,92cm) & 60" (152,4cm).
Model 2BC-XX
XX = Cable Length, Standard Lengths: 24" (60,96cm), 36" (91,44cm), 48" (121,92cm) & 60" (152,4cm).
Ordering Example: 2BA-18 Cable Assembly is 18" (457,2cm), Cable is 2 Cond. Twisted Pair Additional lengths can be quoted upon request.

All dimensions are in inches. Tolerances (except noted): $xx = \pm .02^{\circ}$ (,51 mm), $xxx = \pm .005^{\circ}$ (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pomona:

<u>2BC-AL-60</u> <u>2BA-AL-36</u> <u>2BC-AL-36</u> <u>2BA-AL-48</u> <u>2BA-48</u> <u>2BA-60</u> <u>2BC-60</u> <u>2BC-48</u> <u>2BC-24</u> <u>2BC-36</u> <u>2BA-24</u> <u>2BA-24</u> <u>2BA-24</u> <u>2BA-24</u> <u>2BA-36</u>