

Features

- Dimmable Driver (Allows it to work with outside Dimmers)
- Energy efficient LED lighting 4000K
- 2940 Lumens
- CRI 90+

Construction

- Quality polished edge mirror
- Single phase wire installation, silver backed, copper free
- Construction for surface mounting
- Includes installation hardware

Codes/Standards Applicable


- Conforms to UL Std. 962
- Cert. to CSA Std. C22.2 No.250.0-08
- ETL Intertek 5004931

Electrical System

- 120Vac, 60Hz, 50.6W
- Electric Current: 0.46A
- Wattage: 50.6W

Model

- ICON 2432ADA

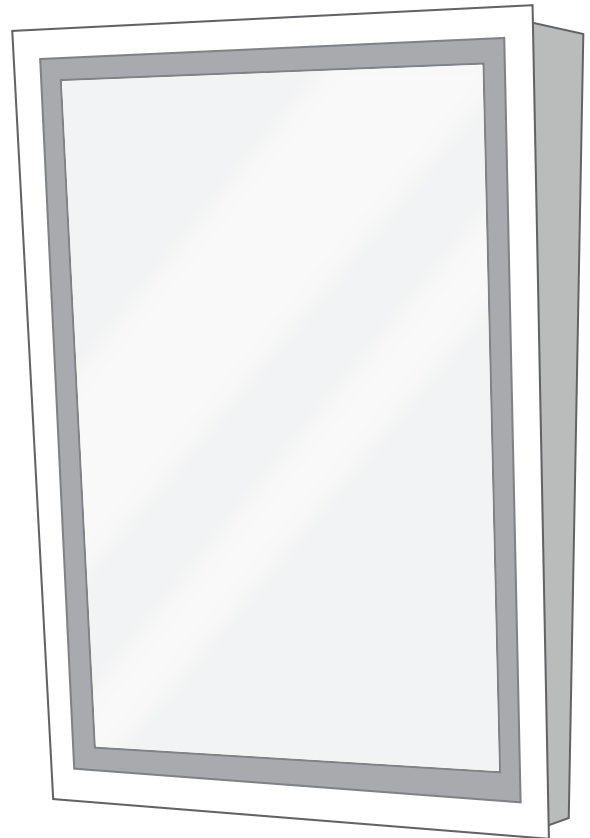


ICON 2432 ADA Wall Mirror - Specification Sheet




Dimensions


- Height: 32"
- Width: 24"
- Depth: 2-4.5"

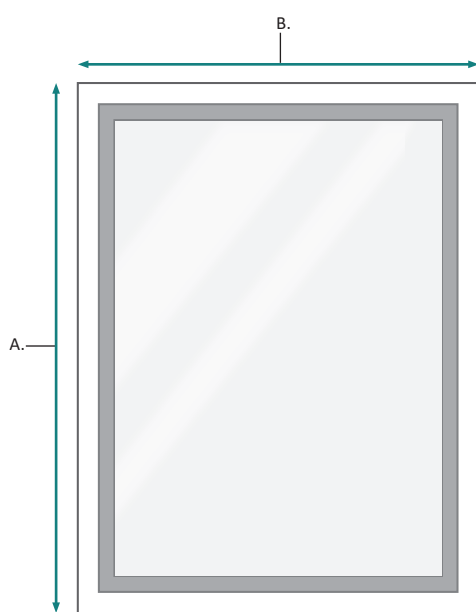

FRONT

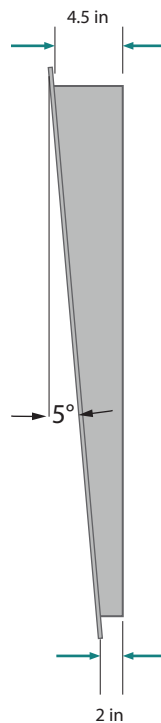

SIDE

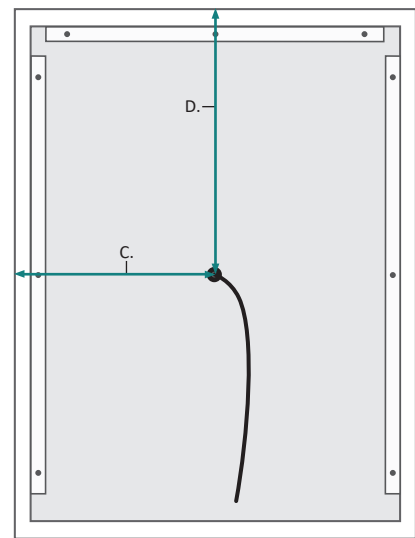

BACK

FRONT, BACK & SIDE

MODEL	A	B	C	D
ICON2432ADA	32	24	11-3/4	15-3/8