artos

MR12045P

INSTALLATION GUIDE

ryton towel warmer, plug-in

BRUSHED NICKEL(BN)



CHROME(CH)





POLISHED NICKEL(PN)



OIL RUBBED BRONZE(OB)







MR12045P

OPERATING SPECIFICATIONS

ryton towel warmer, plug-in



FEATURES

Towel warming, drying and auxiliary heating.

ELEMENT

300W, 110V

CODES

UL Approved CSA-US Approved

REQUIREMENTS


The towel warmer must be installed so that the Element is at the bottom.



MR12045P

PRODUCT DIMENSIONS


ryton towel warmer, plug-in

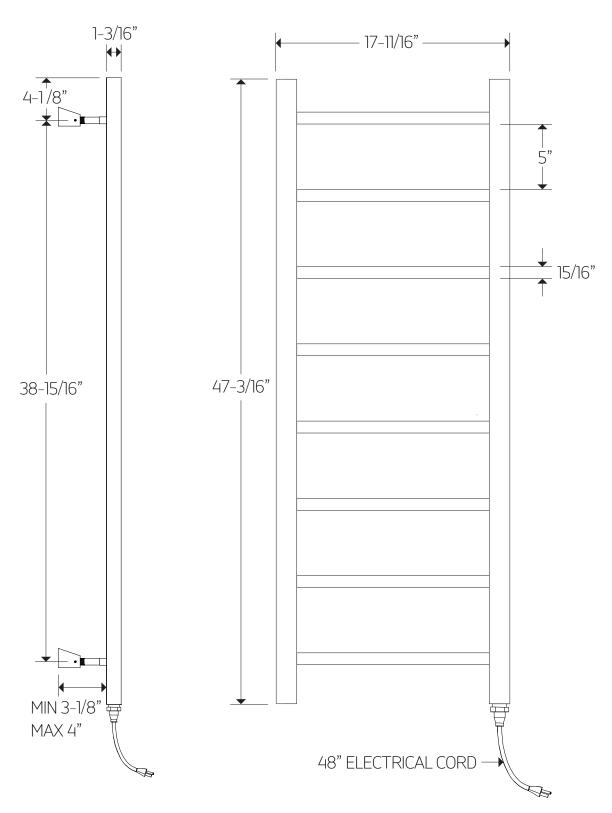


artos


MR12045P


ryton towel warmer, plug-in

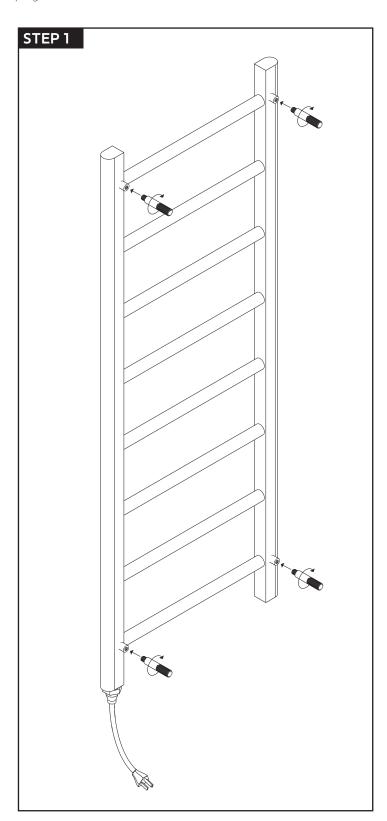

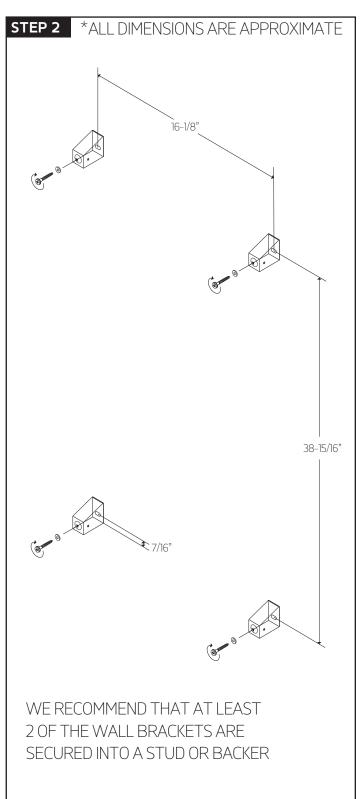

INSTALLATION STEPS

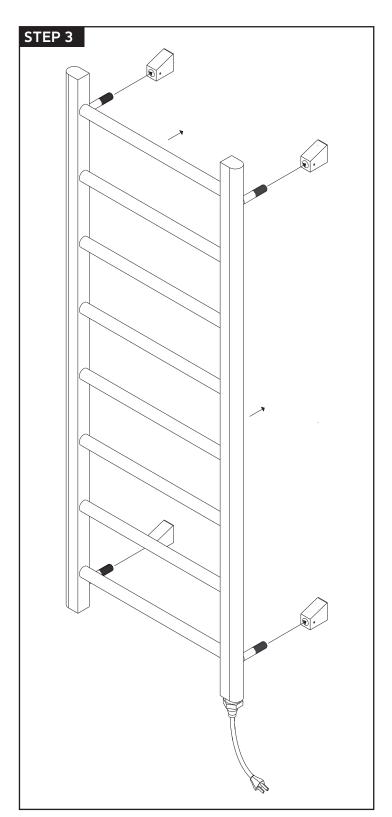


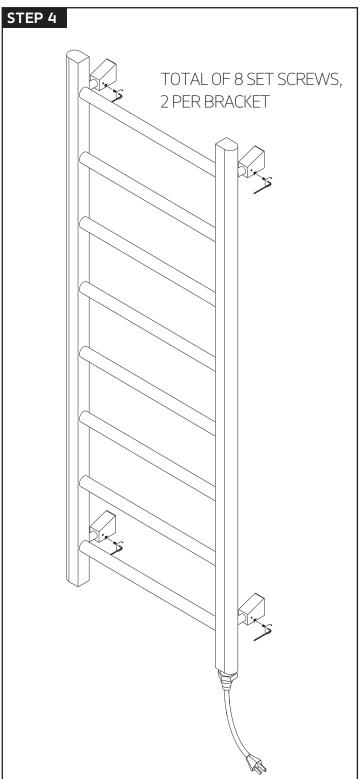

artos

MR12045P

ryton towel warmer, plug-in

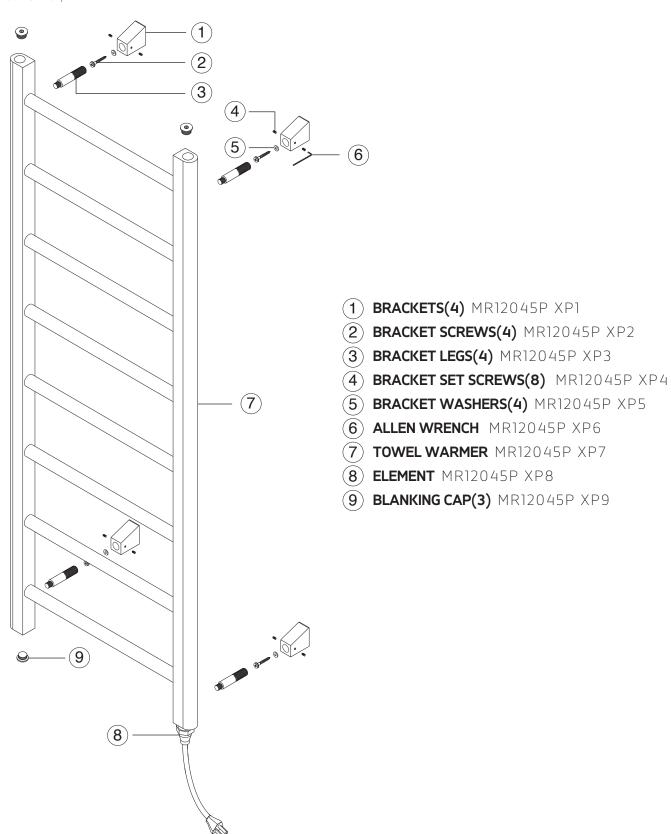



MR12045P

ryton towel warmer, plug-in

CARE & MAINTENANCE

For best results, keep the following in mind to retain the high quality finish of your $\exists \Gamma \subseteq S^{\circ}$ towel warmer:

- •Use a soft, dampened sponge or cloth. On no account should you use an abrasive material such as a brush, scouring pad or steel wool to clean surfaces.
- Test your cleaning agent solution on an inconspicuous area before applying to the entire faucet.
- Wipe surfaces clean and rinse completely with water immediately after applying cleaning agent.
- An ideal cleaning technique is to rinse faucet thoroughly and blot dry any water from the surface after each use.

LIMITED WARRANTY

are guaranteed for five years against finishing defects and one year for the element as the original purchaser owns it.

Damage caused by accident, misuse, abuse, improper installation, improper cleaning or alteration will void the warranty. This warranty does not cover replacement parts where damage is caused by normal wear and tear. Westover, Inc is not responsible for labor charges, installation or other incidental or consequential costs. Proof of purchase must be provided with all claims.

Please register this product online at WWW.ARTOS.US.COM

ITEM NO. **MR12045P** SERIAL NO.