## **SVANGE 3642R LED Medicine Cabinet - Specification Sheet**



### **Features**

- · Dimmable LED task lighting
- Integrated touch sensor control with memory
- Energy efficient LED lighting 5000K
- 4100 Lumens
- CRI 90+
- Integrated Defogger

### Construction

- · Quality polished edge mirror
- · Single phase wire installation
- 5 MM Silver Backed Copper Free
- Installation Either Surface Mount
- (Side Mirror Trim Panels included) or Recessed
- Includes installation hardware

## **Codes/Standards Applicable**


- Conforms to UL Std. 962
- Cert. to CSA Std. C22.2 No.250.0-08
- ETL Intertek 5004931

## **Electrical System**

- 120Vac, 60Hz, 55W
- Electric Current: 0.45A
- Wattage: 55W

### Model

- SVANGE 3642R Right Swinging Door
- Included models in this configuration: Cabinet 1=1242L Cabinet 2=2442R




## **Electrical System**

- Perfomance Requirments: Contains the required
- Supervisory Circiut with the Auto-Monitoring Function as noted by UL 1310
- Input Voltage: Min 112Vac, Nom 125Vac, Max 137Vac
- Frequency:60Hz
- Front Receptacle Current: 102-132Vac Nominal 15A
- USB Output Current:5VDC Nominal 4A




## **CABINET CONFIGURATION**

 Included models in this configuration: Cabinet 1 = 1242L Cabinet 2=2442R

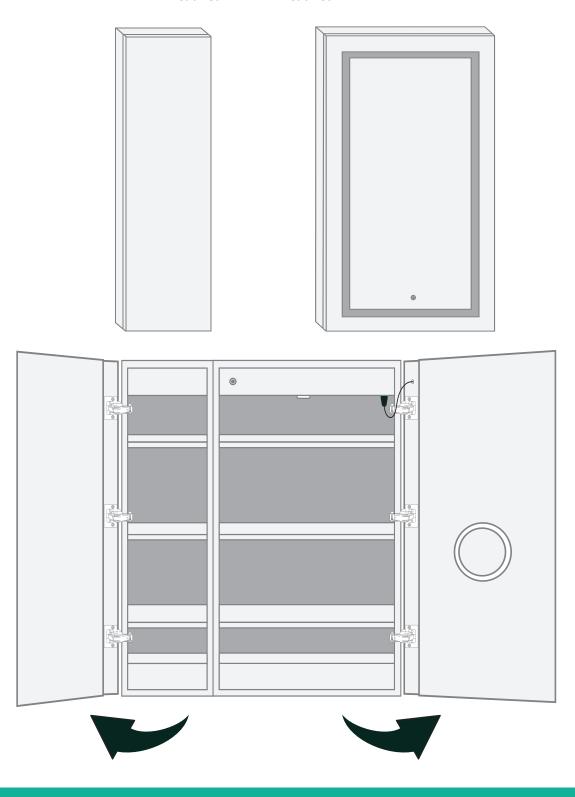




# **SVANGE 3642R LED Medicine Cabinet - Specification Sheet**

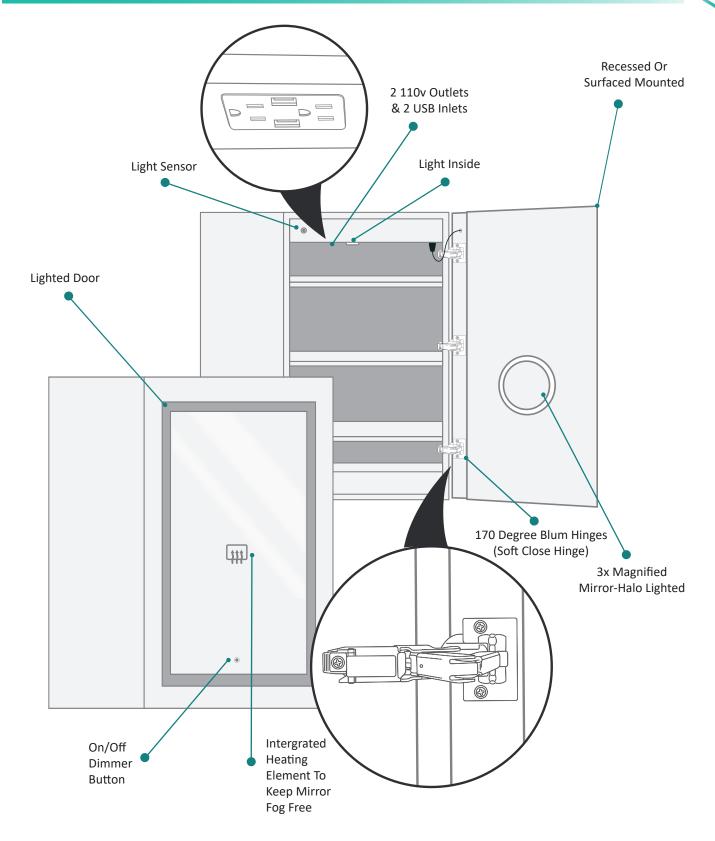






## **SURFACE MOUNT**

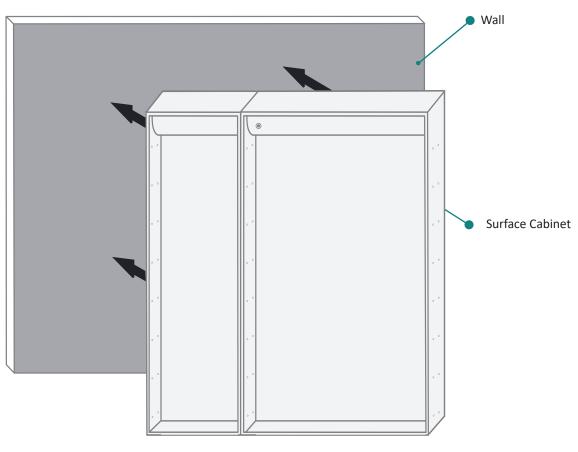

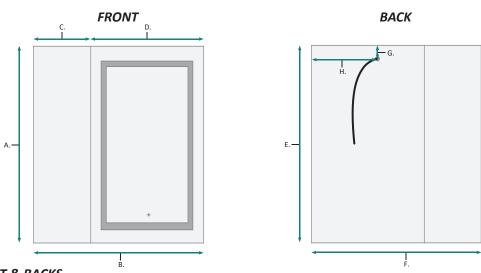


### **FRONT & BACKS**

MODEL	А	В	С	D	E	F	G	н
SVANGE3642R	42	36	12	24	40-1/2	33	1-1/8	11-1/4






## **RECESSED MOUNT**

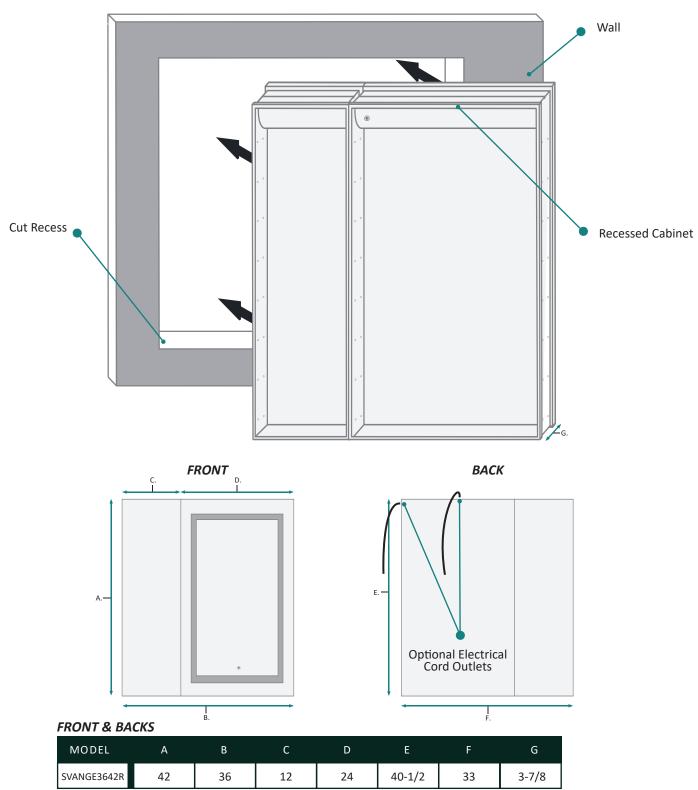



## RECESS INSTALLATION OPTIONAL ELECTRICAL CORD LOCATIONS

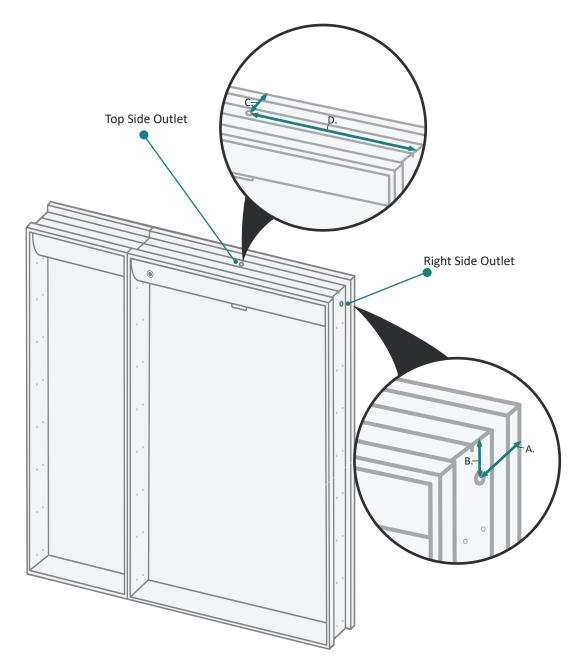



### **ELECTRICAL CORD LOCATIONS**

MODEL	А	В	С	D
SVANGE3642R	1-1/2	1-1/8	1-3/8	11-1/4










### **DOOR & CABINET**

MODEL	А	В	С	D	Е	F	G
SVANGE3642R	7/8	3-7/8	4-3/4	18	3/8	5-1/4	11-1/4

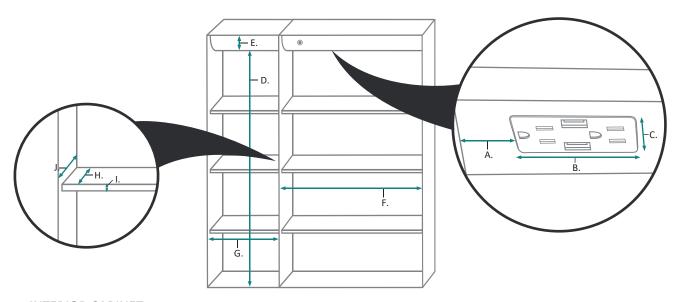

### **INTERIOR CABINET**

MODEL	А	В	С	D	Е	F	G	н	1
SVANGE3642R	3-3/4	5-5/8	1-1/4	32-1/4	2-1/4	22-1/2	10-1/2	2-3/8	3/8