



MODEL	MATERIAL	OVERALL SIZE	INSTALLATION	FINISHES	HARDWARE
E8	Aluminum	14" W 44" H 13" D	Free standing	Satin black, bronze, rust brown powder coat paint.	No hardware, 2 keys included.

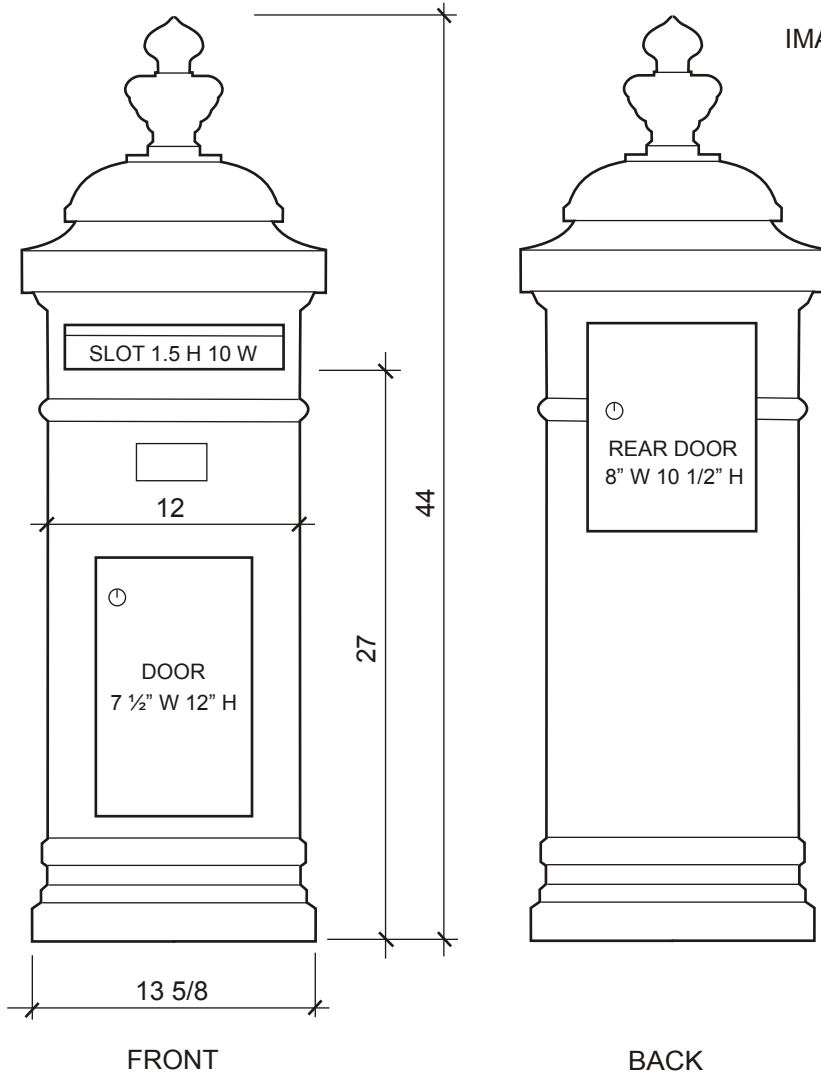

IMAGES NOT TO SCALE

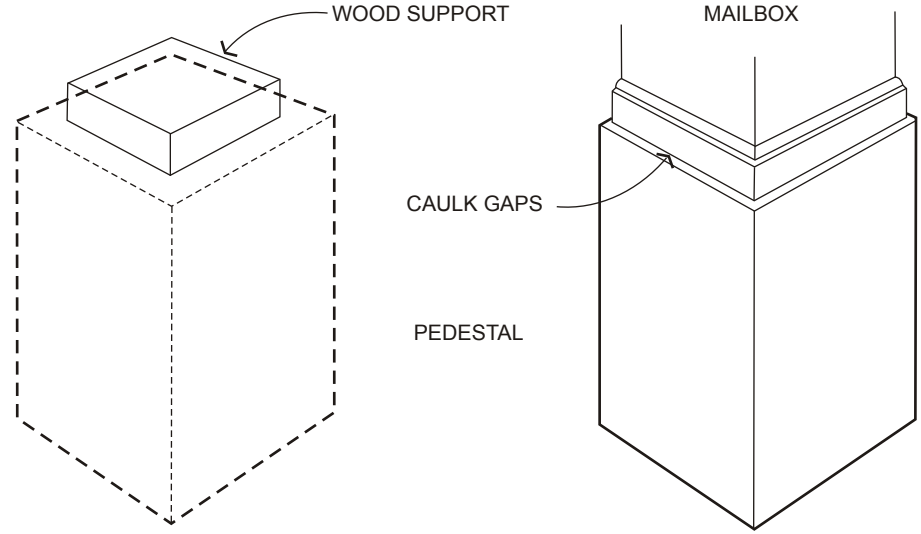

Installation Instructions

**** NOT APPROVED FOR CURBSIDE MAIL DELIVERY, DOOR DELIVERY ONLY.****

- 1 Consult local post office or mail delivery person to determine height of incoming slot from ground to ensure mail can be delivered properly before building pedestal.
- 2 Safeguard keys included in plastic pouch with this instruction sheet.
- 3 Pedestal can be made of masonry or weather treated lumber. Net weight of mailbox is 28 lbs.
- 4 Incorporate 10" x 10" x 3" H weather treated wood sub structure on pedestal for bolting mailbox. The base of the mailbox has a hollow cavity for this purpose.
- 5 After securing mailbox onto pedestal, seal any gaps with caulking to prevent moisture built up and condensation.
- 6 To prevent damage to mailbox, do not over tighten bolts or screws used to anchor mailbox.

Maintenance

Regular dusting and cleaning. Apply 3 in 1 oil into key way of lock a couple of times a year to prevent key from sticking.