




Learn to weave on the
Inklette Loom

THE ASHFORD INKLETTE LOOM

Inkle bands are strong and useful braids. Create colourful belts, bracelets, ties, guitar straps, shoe laces or trims for weaving. You can sew them together and make bags, placemats, cushion covers and much more. The Inkle Loom produces a warp-faced band in which the warp completely covers the weft.

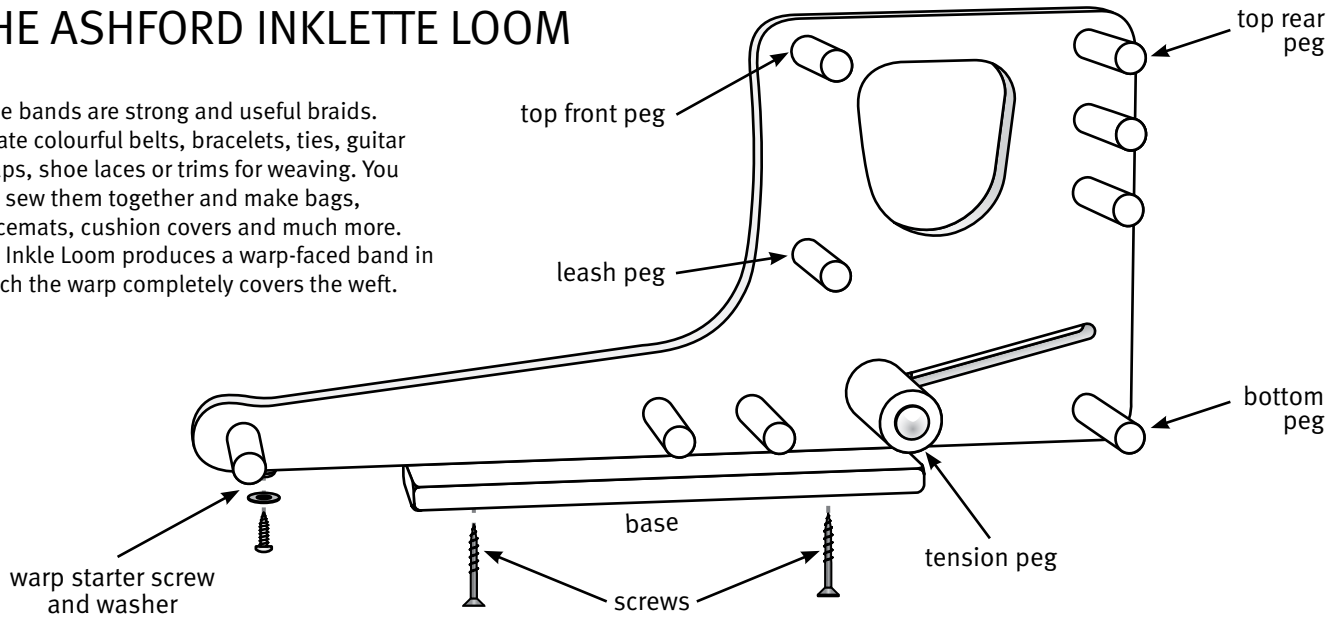

ASSEMBLE YOUR LOOM

You will need a hammer, screwdriver, candle wax or soap (for screw threads), and glue (included).

FINISHING THE WOOD

The kiln dried Silver Beech timber should be sanded smooth first and then sealed after assembly. This protects it from climatic changes and staining and enhances its character and beauty. Our natural Ashford Finishing Wax Polish is ideal for this purpose and is available from your local Ashford dealer.

1. Place the loom flat on a work bench with the holes up. With each peg, check the peg is an easy fit in the hole, if tight use the sandpaper to help it fit nicely. Carefully place a little glue in hole. Too much glue may cause the wood to split! Carefully tap the peg into the hole. Wipe any excess glue away with a damp cloth.
2. Attach the base to the bottom of the loom with 2 long screws.
3. Insert the warp starter round head screw and washer into the bottom of the loom. Leave approx. 1mm ($1/16$ ") gap between the wood and head of the screw.
4. Locate the bolt into the hole in the tension peg and tap the head into the wood.
5. Locate the bolt through the slot in the loom and secure with the washer and nylon knob.
6. Please allow 4 hours for the glue to harden.

BEFORE YOU BEGIN:

WARP LENGTH: 1m (39") to 1.8m (70")

WARP WIDTH: up to 50mm (2")

THE SHED

The shed is obtained by the use of leashes. A thread NOT going through a leash is called an "open" thread.

Shed 1 - is made by pushing down on all the open threads

Shed 2 - is made by lifting all the open threads

THREADS TO USE

Use strong, smooth and colourful threads. Mercerised cotton is good. Most wool is suitable but avoid wool that is soft or hairy (these tend to cling to each other and make it difficult to obtain a clean, open shed). Textured and metallic threads, silk and nylon add variety. Be experimental but make sure all threads have about the same amount of elasticity, otherwise the surface will be uneven.

WIDTH OF WARP

Because the weft thread is pulled tight, the weaving will be reduced to about half the original width of the warp. However, if you want to increase or decrease the width at any stage, this is done by the amount of tension on the weft thread.

SHUTTLE

A shuttle with a bevelled edge for beating is included in the kit.


TENSION PEG

The tension peg is used to keep the warp under tension when weaving. When moving the weaving around the loom, loosen the tension peg to release the tension. Use two hands to advance the warp. When using a full length warp take care to move the weaving little by little. Do not pull too tight! You could break the pegs!

LEASHES

Leashes or string heddles are loops that make it possible to create an up and down shed.

THE LOOM

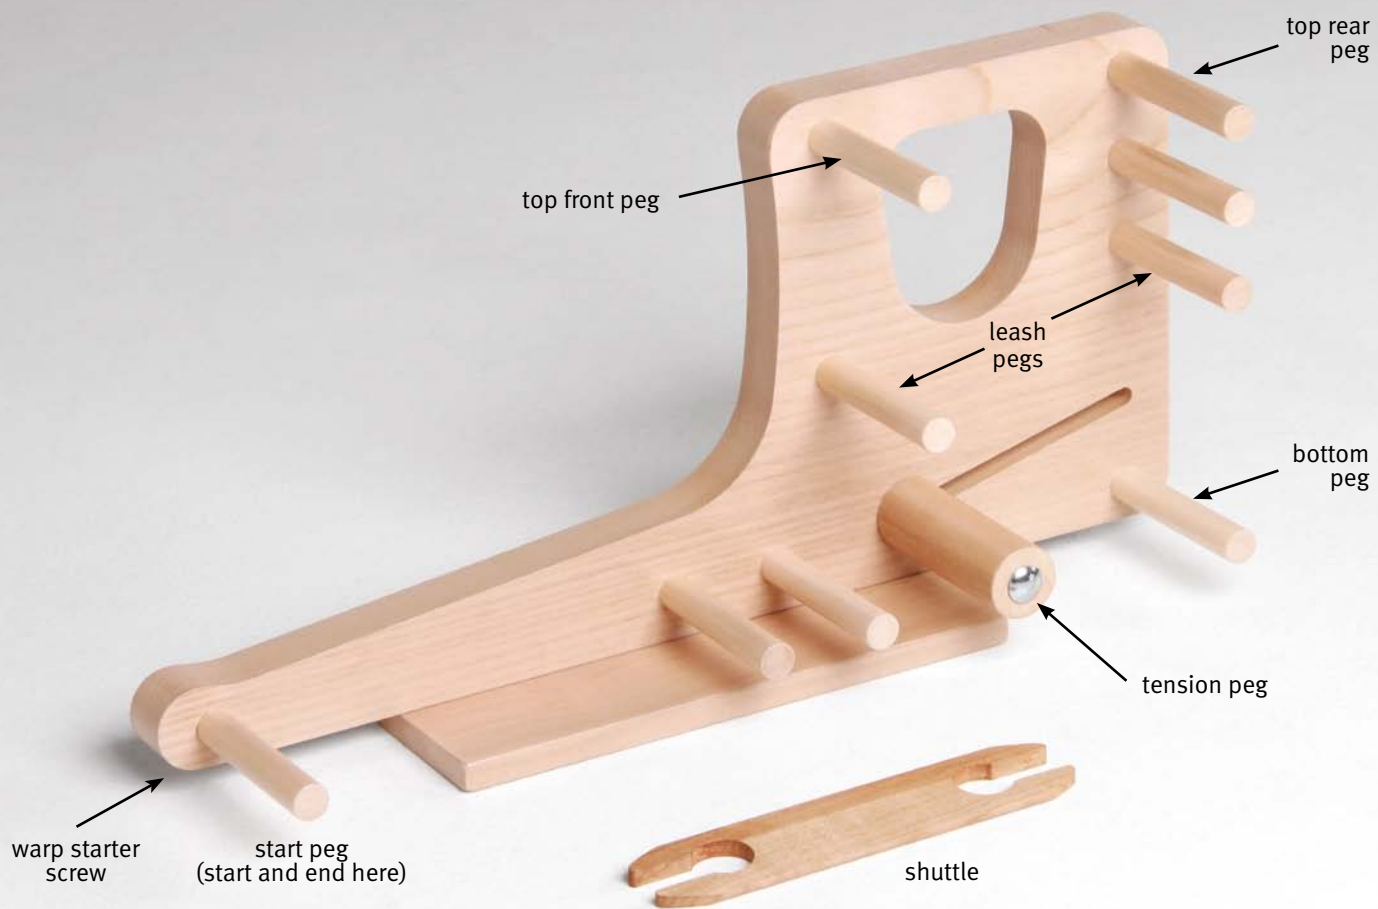

WARP LENGTHS


Determine how long you want your weaving to be. You can weave between 1 - 1.8 metre-long (50 - 70") warps. Use a piece of scrap yarn to work out the path of the warp.

All warps, from short to long, go from the start peg, over the top front peg and top rear peg then around pegs necessary for the warp length you are making, ensuring you go around the tension peg and around the bottom peg before returning to the start peg again for round 2.


Repeat Round 1 and Round 2 continuously until finished.

Tension peg: Before you begin warping set the tension peg approx. 10mm (3/8") from the front of the slot - this will allow you to tighten your warp fully before you begin weaving.


SHORT WARP

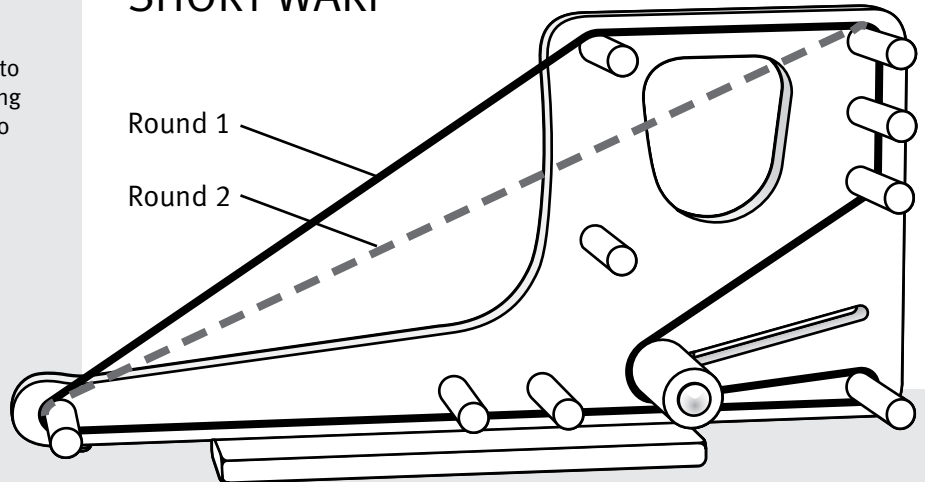

LONG WARP

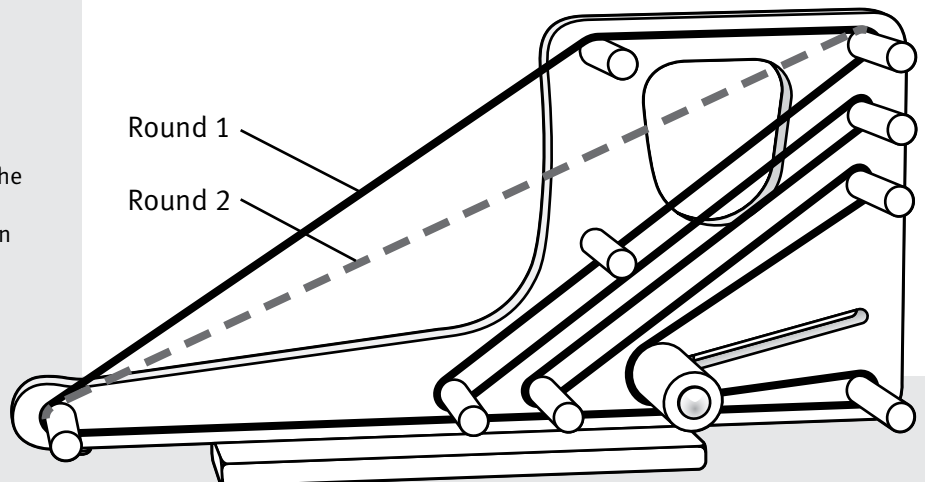

01

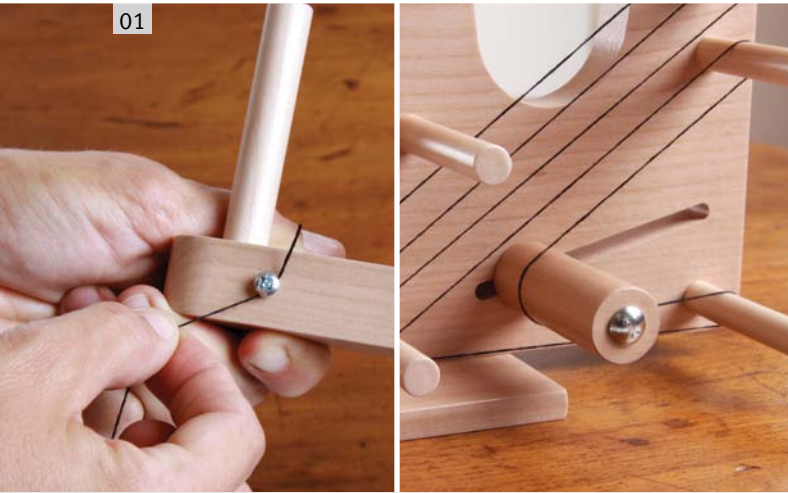


Wrap the beginning warp thread around the starter screw. Before starting your warp, set the tension peg 10mm from the front of the slot. This will allow you to tighten your warp if needed once it is fully warped.

02



Round 1. Take the yarn up and over the top front peg and over top rear peg. Follow the warping pegs, including the tension peg and bottom peg and return to the starter peg.

03

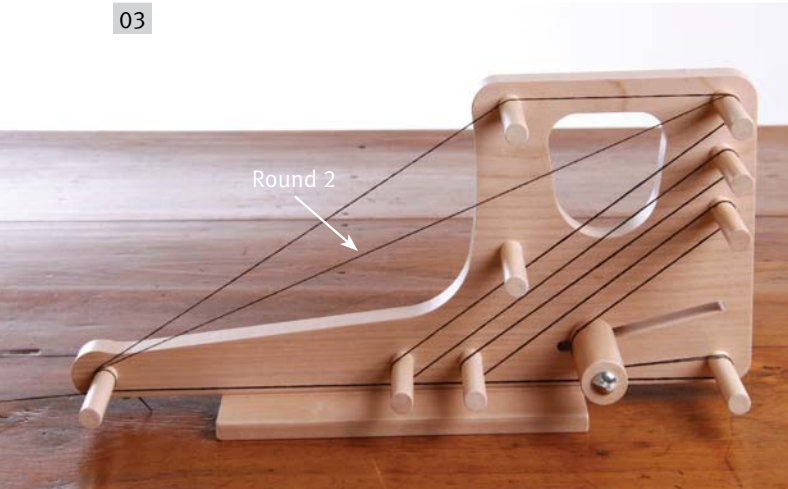


Round 2. Take the yarn straight up and over the top rear peg and around the same warping pegs and back to the starter peg. Repeat as per your draft.


04



When you need to change colours, cut the first colour just past the start peg.

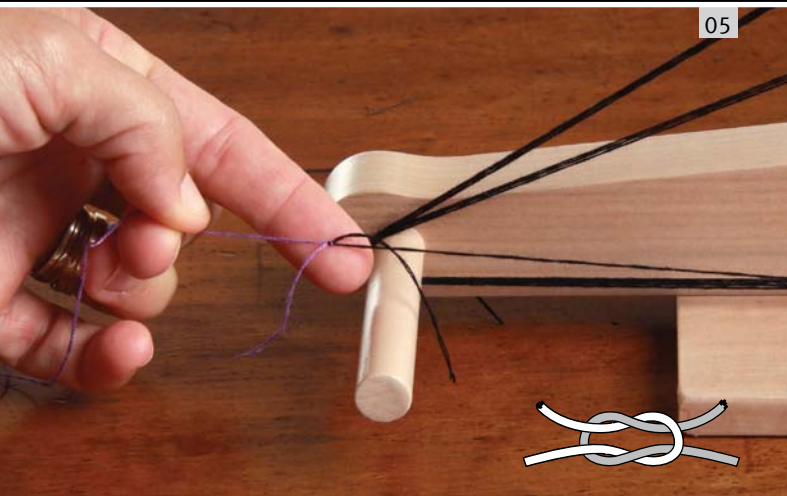


Tie on the next colour using a reef knot as shown above.
(Reef knot: left over right, right over left).

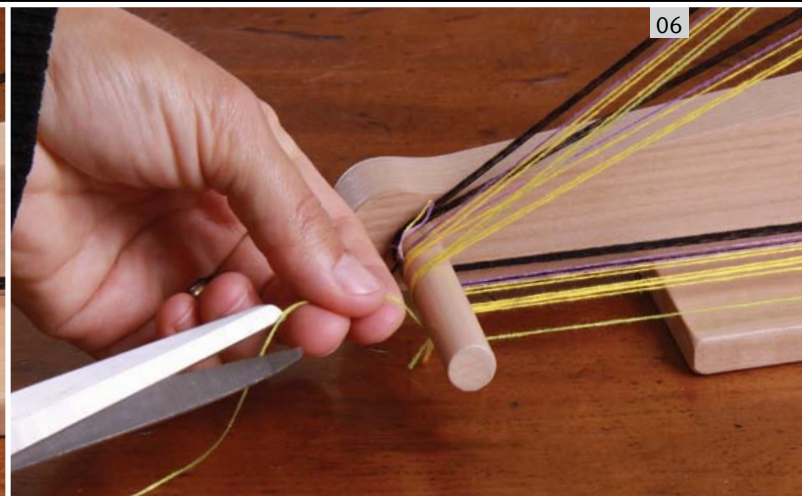

Every time you change colours throughout the warp, tie on the new colour at the start peg.



As the warp gets wider slide the threads towards the loom side so they do not slip off the pegs.

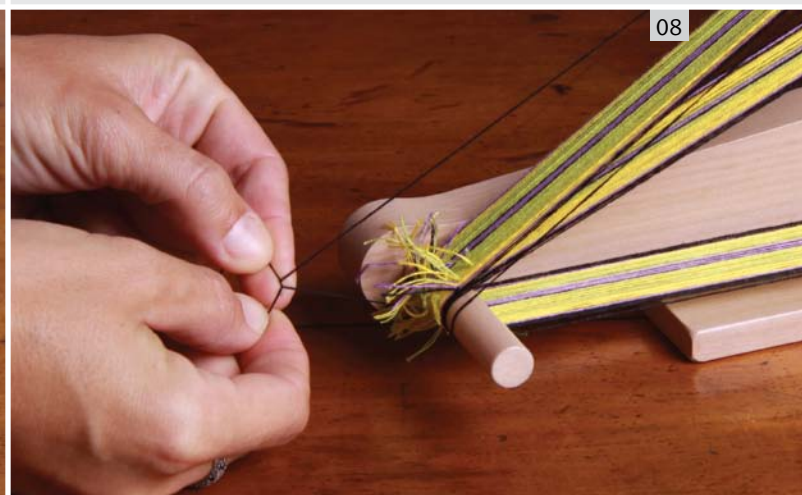

When you have completed the warp, tie the last thread to the beginning thread you had wrapped around the starter screw.

09



Finished warp. Loosen the knob on the tension peg and pull forward to tighten the warp. Now you need to make the leashes.

10




Making leashes. Use string or fine strong cotton. Wind the string around the two leash pegs as shown until you have enough leashes for your top (Round 1) threads.

11



Cut the string as shown. Be careful not to cut your warp threads.


12

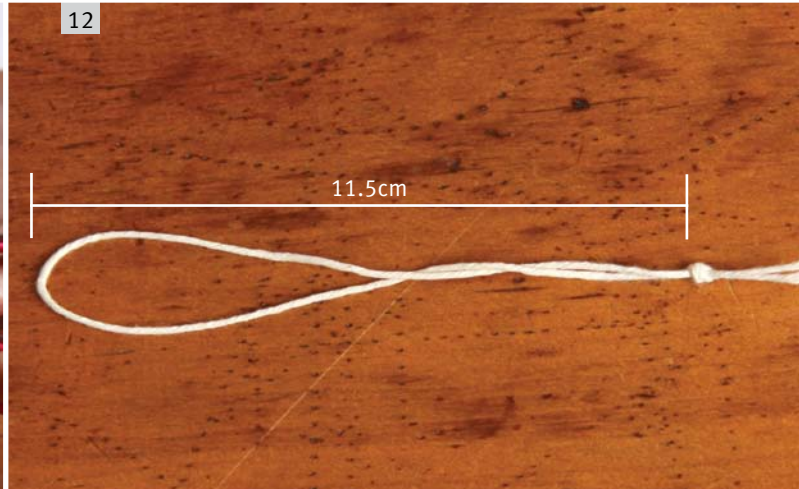

Fold each leash in half and tie a knot 1cm (3/8") from the end. Each leash should be the same length 11.5cm (4½").



Adding the leashes. Take a leash up and over the first thread of the warp (Round 1 thread).

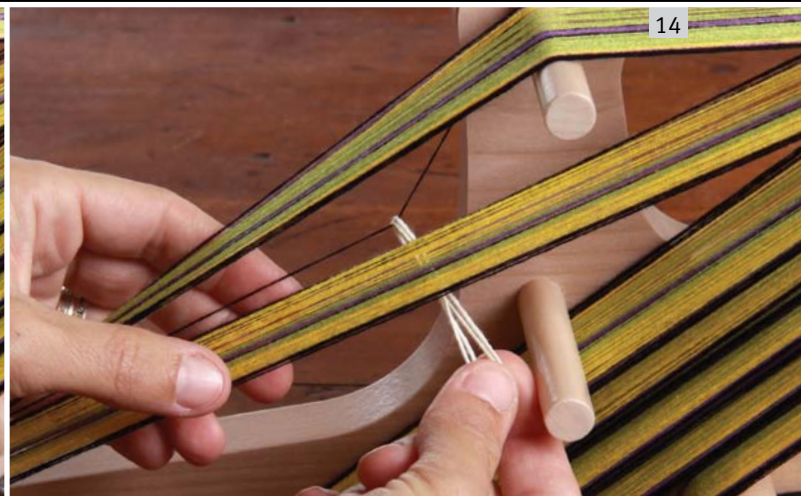

Slip the loops onto the leash peg. NOTE: leashes are only on top threads (Round 1 threads).




Continue across the warp adding leashes to all Round 1 threads. **Keeping your threads in order**, you should have Round 1 with a leash, then the Round 2 thread, then the next Round 1 with a leash and so on.




Shed 1: Push the threads **down** to create a space (shed) in front of the leashes.

17

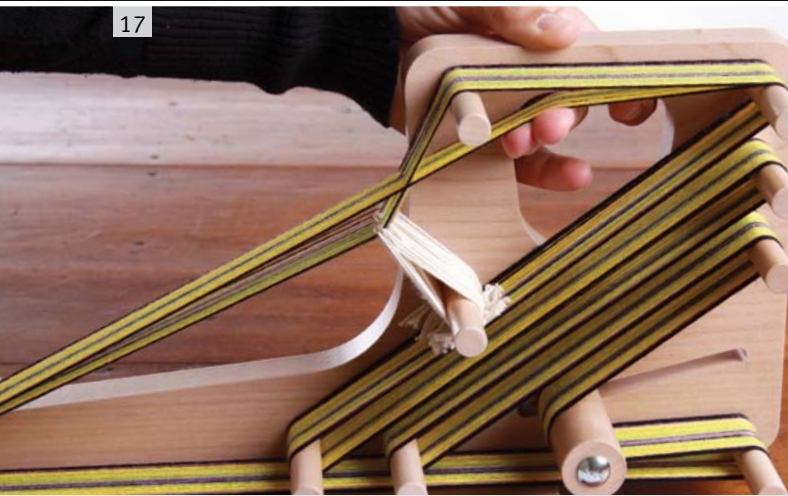

Shed 2: Push the threads up to create a space (shed) in front of the leashes.

18

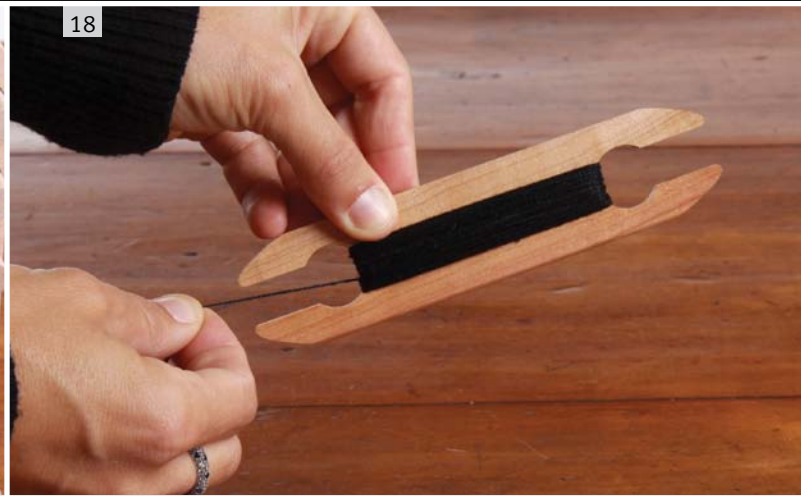

Wind the weft thread onto the shuttle. For tidy edges use a weft thread the same colour as the edge warp threads.

19



Spread the warp by making Shed 1 and place in a piece of cardboard. Make Shed 2 and place another piece of cardboard in and gently push into place.


20



You are now ready to weave.

Make Shed 1 - **Down**. Pass the shuttle all the way through the space between the threads (threads down, Shed 1).

Note: Leave about 10cm of weft thread hanging out, this will be darned in when you have finished.

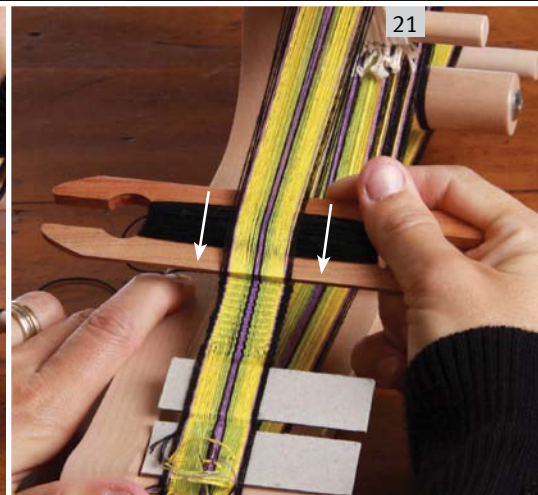

Pull the thread firmly.

Make Shed 2 - Up. Put your shuttle into Shed 2 and beat the previous weft firmly into place. Pull the weft thread tightly. The warp threads will move together so you cannot see the weft at all through the warp.

Continue taking the shuttle through Shed 2 (after beating).



Pull the thread firmly. Change to Shed 1- Down. Put your shuttle into Shed 1.



Beat the previous weft firmly into place. Continue taking the shuttle through Shed 1. Pull the weft thread tightly. Change back to Shed 2 - Up.

Repeat this sequence.

24



Continue weaving.

25



Winding on. Loosen the nylon knob. Move the tension peg back to loosen the warp.

26



Pull the warp forward towards you until the end of the woven piece is about 2.5cm (1") from the front peg. All the threads will move around the pegs.

27




Pull the tension peg forwards until the warp is tight. Tighten the nylon knob. As you move the weaving past the start peg you can remove the cardboard spacers. Continue weaving.

28




Stop weaving when you can't weave any longer because the knots in the warp are close to the leashes. You are now ready to remove your weaving from the loom BUT before you do sew in the weft ends.

29

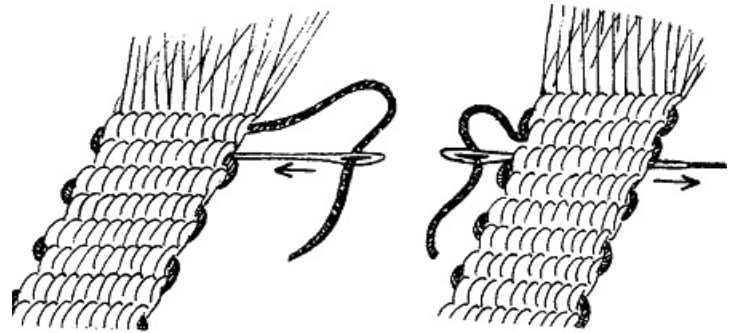

Sewing in weft ends. Sew the weft back three or four sheds to lock it, this is easier to do with the warp under tension.

30

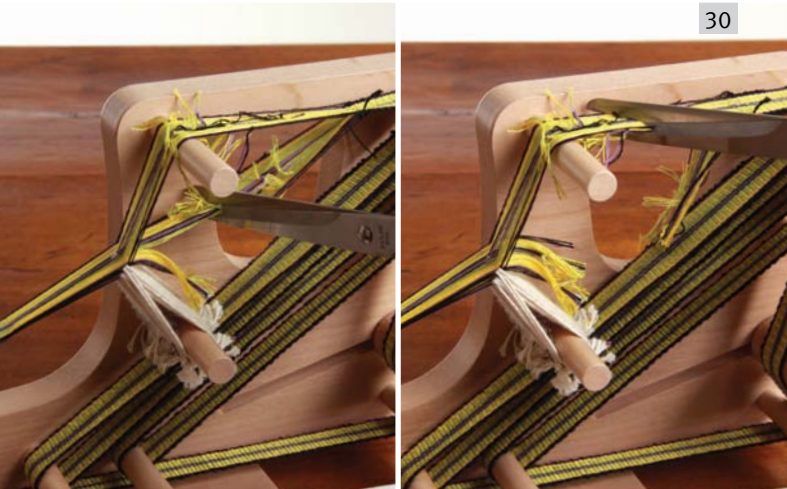

Remove the weaving from the loom by cutting each half of the warp a few centimetres (inches) behind the leashes. Pull the threads out off the leashes. To finish, either let the ends hang loose as a fringe, plait them, twist them, tie knots in them or glue them and cut them close to the braid.

Hints:

To keep the edges straight when weaving follow these simple rules:

1. Keep the warp very tight. A high tension makes the whole braid and edges look better when finished.
2. Try to keep the same tension.
3. Every time you pull the shuttle out of the shed, before you push the weft into place with the shuttle, pull the previous weft thread again. That will even out the little loops that occur between the two outer warp threads. This is essential for even edges.

ashford

WHEELS & LOOMS

Ashford Handicrafts Limited

Factory and Showroom: 415 West Street

P O Box 474, Ashburton, New Zealand

Telephone: +64 3 308 9087

Facsimile: +64 3 308 8664

Email: sales@ashford.co.nz

Internet: www.ashford.co.nz



V01300316