


Doormerica

DC161 / DC161BF - Standard Duty Commercial Door Closer

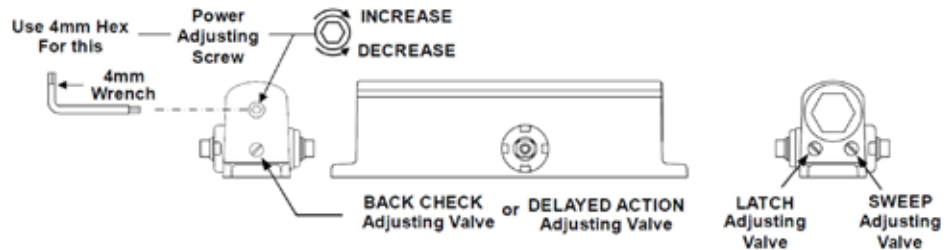

Specifications:

Full rack and pinion type with cast aluminum alloy body. All closers shall be provided with non-critical valves adjustment to independently regulate the sweep, latch and back-check. Closer shall have full spring adjustment from size 1 to size 4 for barrier free (BF) size and size 2 to size 6 for standard size. The closer shall be pre-adjusted at the factory to size 2 for the DC161BF and size 3 for DC161. Closer shall be non-handed with slim line cover with a projection of 3" from the surface of the door. All closers shall be mounted to allow the maximum degree of swing.

Features:

- Same hole pattern as Norton 1600.
- Tri-Pack with regular, parallel and top-jamb mounting, instructions and full size template.
- Standard spring adjustment from size 2 to 6
- Non handed
- Standard with adjustable sweep, latch and back check.
- Slimline Plastic Cover
- SNB -Sex Nuts and Bolts

Options:

- BF: Barrier free spring adjustment from size 1 - 4
- H: Hold Open Arm



CODE COMPLIANCE:

- ANSI A156.4 Grade 1 UL10C and UBC 7.2 for positive pressure.
- ANSI A117.1 and ADA for barrier-free accessibility
- C-UBC -California Uniform Builders Code -2001
- California State Fire Marshall (CSFM) approved

10 YEAR LIMITED WARRANTY

Stocked Product

Item	Finish
DC161	Aluminum, Duro
DC161BF	Aluminum, Duro
DC161H	Aluminum, Duro