

Falcon - Heavy Duty Levers

MA - Series

Features:

Door thickness: Standard accommodates thickness of 1-3/4" to 2-1/4".

Backset: 2-3/4" only.

Case: Cold formed steel, zinc dichromate plated, .090" thick. Optional lead wrapping available.

Hubs: Hardened steel.

Handing: Right hand is standard; left hand optional. Reversible in the field.

Cylinders: Furnished with Schlage "C" key way . IC cylinders available as an option

Bind Resistant Trim: Heavy-duty through-bolted inserts clamp the trim on the door assuring proper alignment. Designed to bottom out on 1-3/4" doors to prevent door collapse. Provided with 10-32 screws for strength and thread sealant to prevent loosening.

Latch Bolt: Two-piece brass, mechanical anti-friction bolt. 3/4" projection.

Dead Bolt: 1" throw, brass with a 1/4" thick hardened steel, freeturning, saw-resistant roller.


Faceplates: (Armored Front) 1-1/4" x 8" brass, bronze and stainless steel adjustable for door bevel. Reinforced by heavy gauge steel with stabilizing ribs.

Strike: Brass, bronze or stainless steel. Meets ANSI A115.1 for frame preparation. Strike is handed. Optional 1-1/8" lip-to-center reversible flat lip available.

ANSI/BHMA: Meets ANSI/BHMA 156.13, Series 1000. UL: 3 hour A label.

Warranty: 1 Year Limited


FEATURES

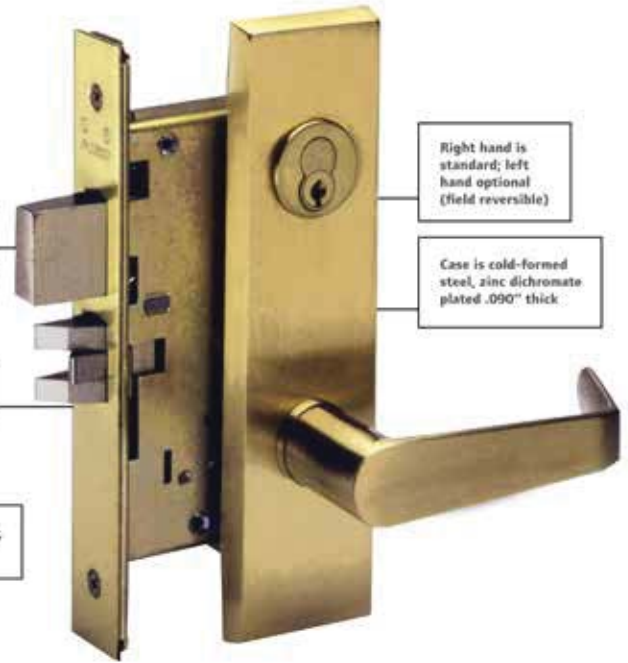



Stocked Product

Finish: 626

DESIGNS



QG
Quantum-Gala

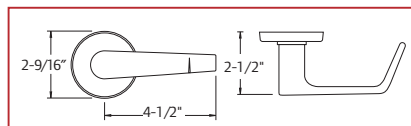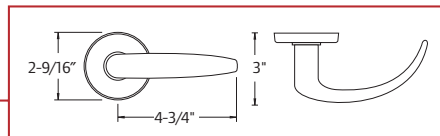

DG
Dane-Gala