

Falcon - Heavy Duty Levers

T - Series

Features:

Door Thickness: 1-3/4" to 2-1/8" standard. Thin door adapter kit (A30775-000-00) available for doors thinner than 1-3/4", please specify door thickness.

Special Order

Backset: 2-3/4" standard. 2-3/8" also available. Link (A22161-005-10) available for 5" backset.

5" backset Special Order

Mechanism: Parts constructed of brass or cold formed steel, zinc plated and dichromated for rust resistance. Springs are stainless steel.

Attachment: Lock chassis secured to door by threaded mounting nuts. Completely preassembled outer trim and inner spindle assembly are through-bolted over chassis using (2) 10-32 screws. Adding rose and lever to inner spindle assembly completes installation.

Handing: Locks are non-handed.

Cylinders: Furnished with Schlage "C" keyway and IC prep options.

Trim: Roses are heavy wrought brass or bronze, installed over pressure cast rose inserts which are through-bolted through door. Levers are pressure cast (solid levers—no inserts) material finished to match mating parts.

Latches: 9/16" bolt projection, UL listed with latch faceplates 2-1/4" x 1-1/8" with square corners standard. 3/4" projection, UL listed latch with 2-3/4" backset also available. Adjustable front standard.

Strikes: 4-7/8" x 1-1/4" ANSI strike with curved lip to meet ANSI A115.2 door frame preparation standard.



Screws: Furnished with combination screws for use in wood or metal doors and frames.

Electrified Functions: Available in 24 VDC .185 AMP.

ANSI/BHMA: Meets ANSI/BHMA A156.2, Series 4000, Grade 1.

UL: 3 hour A label.

Warranty: 1 Year Limited

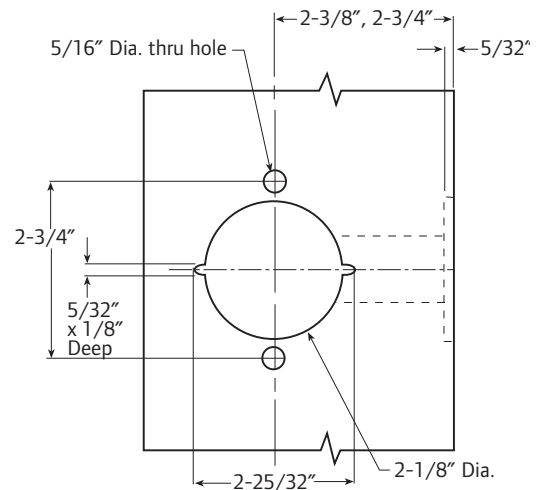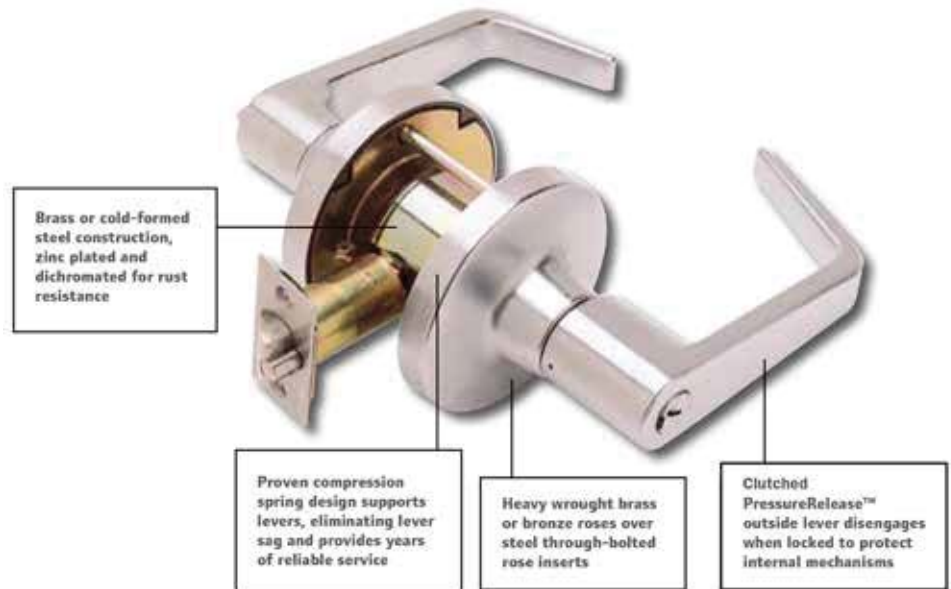

Elevation

Stocked Product

Design Dane, Quantum
Finish 626, (613 Dane SCH "C" Only)
Keyway Schlage C, (IC Except 581)
Backset 2-3/4" Standard, also available 2-3/8"