


ASSEMBLY AND INSTALLATION INSTRUCTIONS

CA-WSU180

WARNING: BE SURE TO SHUT OFF POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE INSTALLING OR SERVICING THIS FIXTURE.

**NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirement.
2. READ AND SAVE THIS INSTRUCTION.**

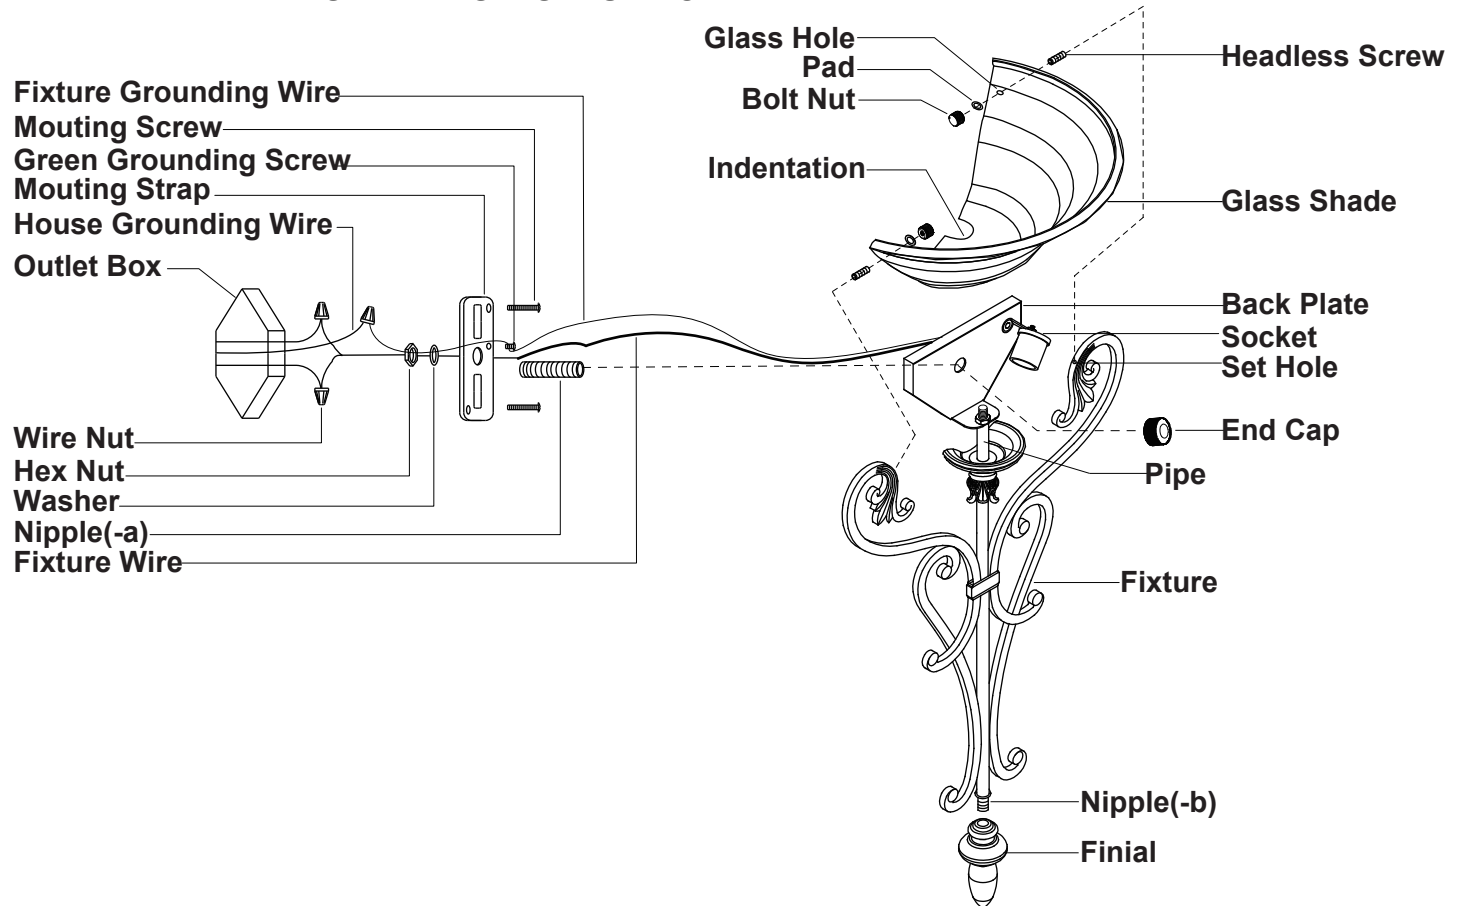

1. Attach nipple(-a) to the mounting strap, then secure it with a washer and a hex nut.
2. Attach the mounting strap to the outlet box by using the two mounting screws.
3. Attach the glass shade to the pipe by aiming the indentation at the pipe.
4. Aim the glass holes at the set holes, secure the headless screws into the set holes across the glass hole. Then secure the glass shade with the two pads and the two bolt nuts.
5. Secure the finial to nipple(-b) tightly.
6. Pull out the outlet wires and house grounding wire from the outlet box. Make wire connections with wire nuts:
 - The black wire from the light to the black wire from the power source.
 - The white wire from the light to the white wire from the power source.
 - Attach the fixture grounding wire to the mounting strap with the green grounding screw. Then connect it to the house grounding wire with a wire nut.Carefully tuck the wires back into the outlet box.
7. Attach the back plate to the mounting strap by inserting the nipple(-a), then secure it with the end cap.
8. Install a bulb to the socket(not included). See relamping label at socket area or packaging for maximum allowed wattage.
9. Turn on the power at the main fuse or circuit breaker box.