

ASSEMBLY AND INSTALLATION INSTRUCTIONS

CC32720


WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirements.

Installation Steps

For Semi-Flush

1. Attach two screws to the mounting strap, and secure with two lock nuts. (You can adjust the length of the screw if necessary.)
2. Attach the mounting strap to the outlet box by using two mounting screws.
3. Make wire connections with wire nuts:
 - Connect the black wire from fixture to the black wire from power source.
 - Connect the white wire from fixture to the white wire from power source.
 - Attach the grounding wire and house grounding wire to the mounting strap with a green grounding screw. Carefully tuck wires back into the outlet box.
4. Attach the canopy-1 to the outlet box by inserting two screws, and secure with two bolt nuts.
5. Install bulbs. (Please do not exceed the maximum capacity, which is recommended on the package.)
6. Thread the nipple into the coupling, and secure with a washer and hex nut.
7. Attach the glass shade onto the fixture, and secure with the finial.
8. Turn on the power at fuse or circuit box.

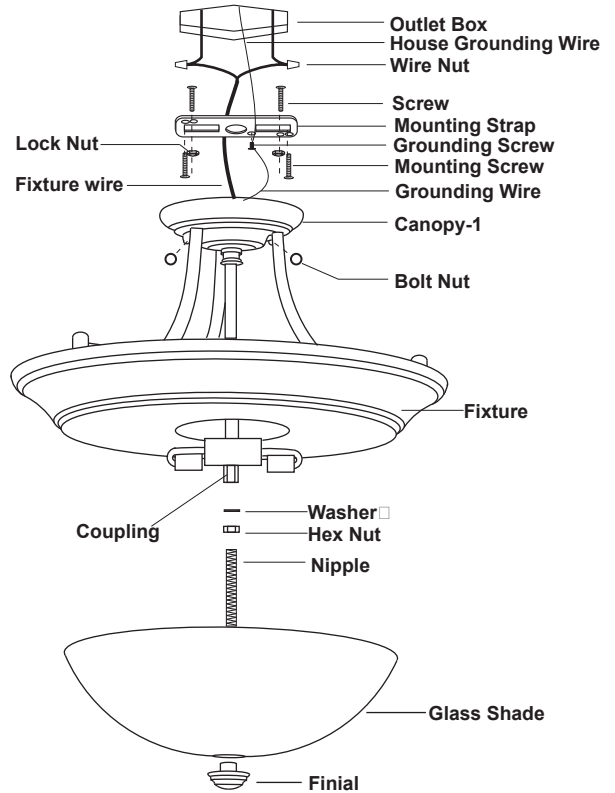

For Pendant: (See Fig.1)

1. Attach the nipple-1 to the mounting strap, and secure with a washer and hex nut.
2. Attach the mounting strap to the outlet box by using two mounting screws.
3. Thread the fixture wire and grounding wire through the loop, and secure the loop onto the nipple-2.
4. Choose a certain length of the chain you need, and weave the fixture wire and the grounding wire through the chain links. Spread one end of the chain link to clamp securely to the loop.
5. Secure the top loop to the nipple-1.
6. Thread the fixture wire and grounding wire through the collar, canopy-2, top loop, nipple and mounting strap in order.
7. Clamp the other end of the chain link to the top loop.
8. Follow step 3 as for Semi-Flush.
9. Attach the canopy-2 to the mounting strap by inserting the top loop, and secure with the collar.
10. Follow steps 5~8 as for Semi-Flush.

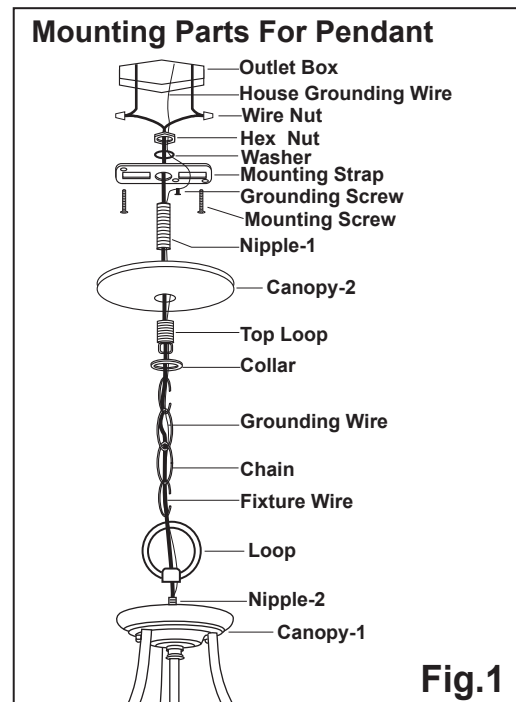


Fig.1