


# ASSEMBLY AND INSTALLATION INSTRUCTIONS

LS-VLD102/LS-VLD103/LS-VLD104

**WARNING: BE SURE TO SHUT OFF POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE INSTALLING OR SERVICING THIS FIXTURE.**

**NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.  
2. READ AND SAVE THIS INSTRUCTION.**

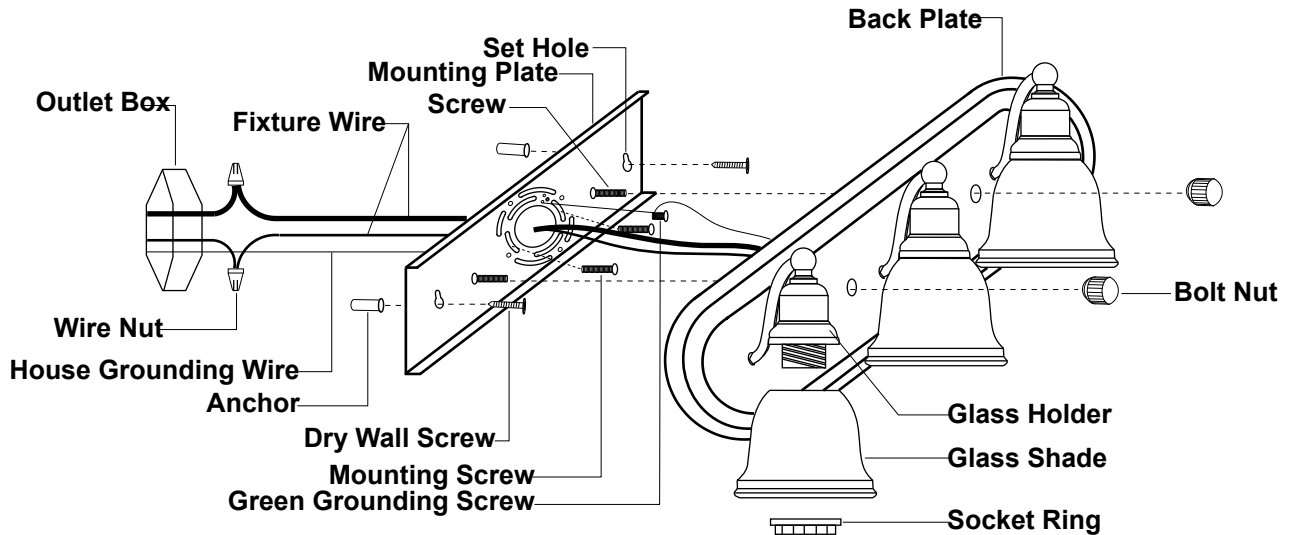

1. Unscrew the bolt nuts from the back plate, and then remove the mounting plate.
2. Attach the mounting plate to the wall.
  - a) If the wall material is wood:  
Attach the mounting plate to the wall by using two mounting screws, then secure the dry wall screws through the set holes to the wall.
  - b) If the wall material is cement:  
Place the mounting plate to the wall and mark the target on the wall from the set hole for drilling two holes. Remove the mounting plate. Drill the holes and thread the anchors into the holes, then attach the mounting plate to the outlet box by using two mounting screws. Secure the dry wall screws through the set holes into the anchors.
3. Pull out the outlet wires and the house grounding wire from the outlet box. Make wire connections using the wire nuts:
  - The black wire from the fixture to the black wire from the power source.
  - The white wire from the fixture to the white wire from the power source.
  - Attach the fixture grounding wire to the mounting plate with the green grounding screw. Then connect it to the house grounding wire with a wire nut.Carefully tuck the wires back into the outlet box.
4. Attach the back plate to the mounting plate by using the screws, then secure them with the two bolt nuts.
5. Attach the glass shades to the glass holders, then secure them with the socket rings.
6. Install bulbs (not included). See relamping label at socket area or packaging for maximum allowed wattage.
7. Turn on the power at the main fuse or circuit breaker box.