


ASSEMBLY AND INSTALLATION INSTRUCTIONS

SP56614

WARNING: BE SURE TO SHUT OFF POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE INSTALLING OR SERVICING THIS FIXTURE.

**NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.**

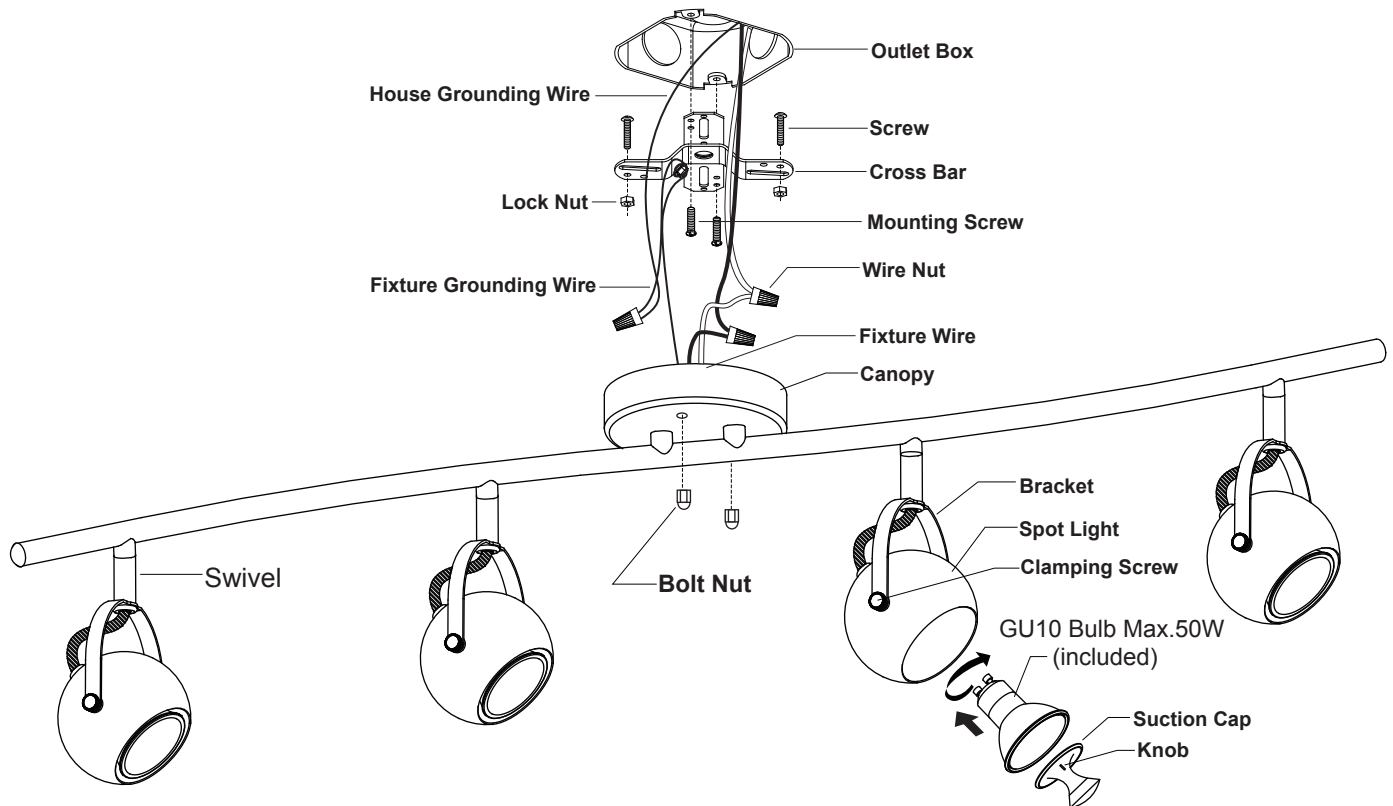

1. Attach the two screws to the cross bar, then secure them with two lock nuts. Adjust the length of the screws if necessary.
2. Attach the cross bar to the outlet box by using two mounting screws.
3. Pull out the outlet wires and house grounding wire from the outlet box. Make wire connections using the wire nuts:
 - The black wire from the fixture to the black wire from the power source.
 - The white wire from the fixture to the white wire from the power source.
 - The fixture grounding wire to the house grounding wire from the power source.Carefully put the wires back into the outlet box.
4. Attach the canopy to the cross bar by inserting two screws, then secure it with the bolt nuts.
5. Install bulbs (Included).
 - a. Attach the suction cap to the top surface of the halogen bulb lens.
 - b. Insert and twist the bulbs (GU10 BASE MR16C BULB ONLY) into the sockets using the suction cap.
 - c. Remove the suction cap from the halogen bulb lens by pulling the knob of the suction cap.Note: Do not discard the suction cap, it will be needed when replacing the bulb.
6. Adjust the spotlight to the proper position by using the swivels.
 - a. Adjust the bracket to a proper position.
 - b. Loose the two clamping screws slightly.
 - c. Adjust the spotlight head to the proper position.
 - d. Secure the two clamping screws tightly. (NOTE: To avoid the spotlight head slipping, make sure the clamping screws are secured.)
7. Turn on the power at the main fuse or circuit breaker box.