


VERTICAL/FIXED BEAM ANCHOR 3"- 14" (5K)



The Vertical/Fixed Beam Anchor is designed for fall protection, rope access and work positioning. It is constructed with lightweight aircraft aluminum bars and a 360° swivel D-Ring connector. The clamps attach without tools to I-Beams either overhead or underfoot. This model has a minimum breaking strength of 5,000 lbs.

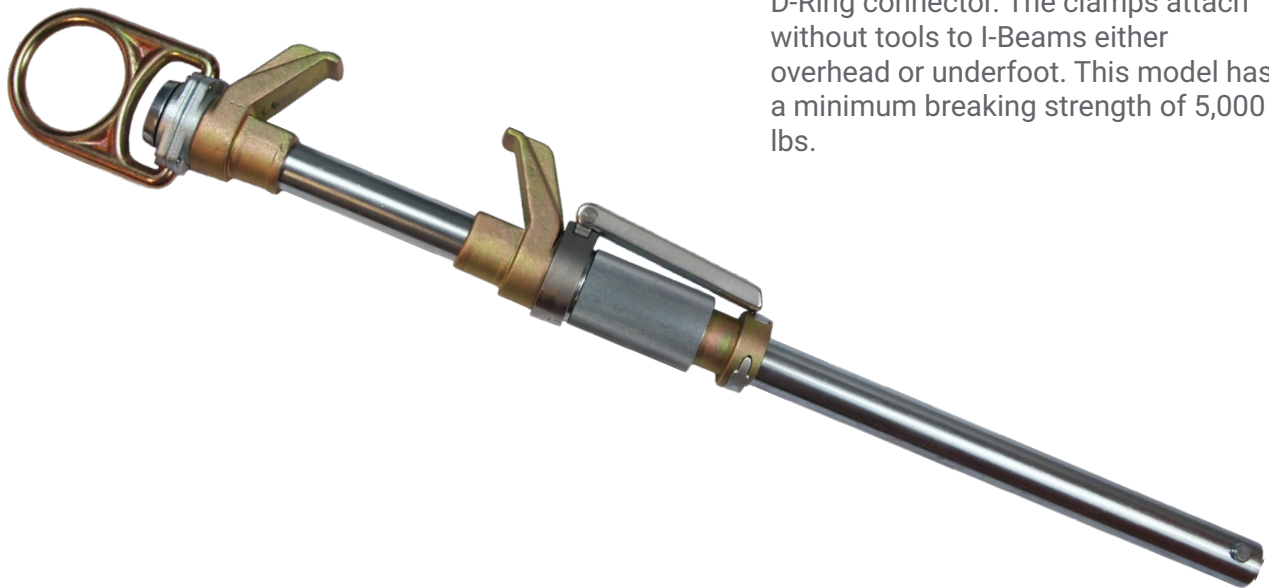

Key Features

- Beam Flange Width Range: 3" to 14"
- Minimum Breaking Strength: 5,000 lbs.
- Compliance: ANSI Z359.1-2007, OSHA 1926.502 and OSHA 1910.66
- Beam Flange Thickness: .25" - 1.25"

Part #	Part Name	Weight
A6105	Vertical/Fixed Beam Anchor 3"-14" (5k)	7 lbs.

