



HUNTER
CONTINUOUS INSULATION

Hunter Panels Xci Foil

Polyisocyanurate Insulation Manufactured On-Line to Foil Facers

DESCRIPTION

Xci Foil is a high thermal rigid insulation panel composed of a closed cell polyisocyanurate foam core manufactured on-line to an impermeable foil facing material. It is designed for use in commercial wall applications to provide continuous insulation within the building envelope.

FEATURES AND BENEFITS

- Highest R-Value per inch of any insulation available
- Meets the new minimum continuous insulation standards prescribed in ASHRAE 90.1-2010 and IECC 2012
- Manufactured with NexGen Chemistry: Contains no CFCs, HCFCs, is Zero ODP, and has virtually no GWP
- Lightweight yet durable, easy to handle. Cuts with a knife or saw.

APPLICATIONS

- Provides continuous insulation (ci) for standard wood frame, steel stud, CMU and masonry cavity exterior wall construction
 - Suitable for masonry cavity wall applications
- Note: Xci Foil is not suitable for exposed interior applications.*

PANEL CHARACTERISTICS

- Available in three compressive strengths per ASTM C 1289 Type 1, Class 1 Grade 1 (16 psi), Grade 2 (20 psi) and Grade 3 (25 psi)
- Available 4' x 8' (1220mm x 2440mm) and 4' x 9' (1220mm x 2743mm) panels in thicknesses of 1" (25mm) – 3.5" (89mm)
- Other sizes are available upon special request— (for example: 12", 16", or 24" width x 96" length)

CODES AND COMPLIANCES

- ASTM C 1289 Type 1, Class 1 Grade 1 (16 psi), Grade 2 (20 psi) and Grade 3 (25 psi)
- International Building Code Chapter 26
- NFPA 285 passed, contact Hunter for details
- ICC-ESR-3174
- Miami-Dade County, FL, NOA No: 12-0916.07 – Exp 1.2.2019




WRB

The incorporation of Weather Resistant Barriers (air, vapor and moisture) is a critical element of a wall assembly. A design professional familiar with local code requirements should specify the selection and placement of any WRB. Furthermore, it is recommended that a dew point calculation of the proposed assembly be conducted to determine the type and locations of a proposed WRB.

Note: The NFPA 285 fire test is an assembly test. The performance of the WRB must also be considered. Please consult Hunter Panels for details and specifications.

HUNTER PANELS Xci FOIL

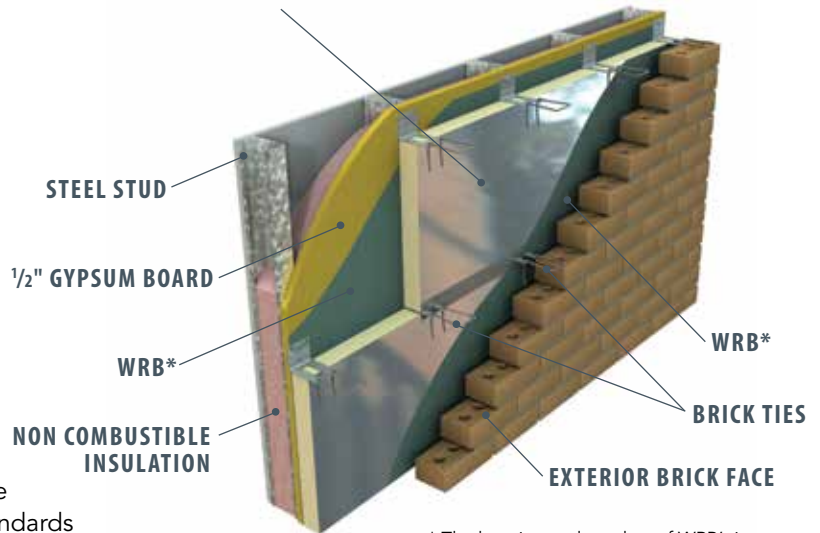

* The location and number of WRB's in the wall assembly are determined by the architect. **Contact Hunter Panels for a list of approved WRB's for each assembly.**

Typical Physical Property Data Chart

Property	Test Method	Value
Compressive Strength	ASTM D 1621	20 psi* min. (138kPa, Grade 2)
Dimensional Stability	ASTM D 2126	2% linear change (7 days)
Moisture Vapor Permeance	ASTM E 96	<0.05 perm (2.875ng/(Pa·s·m ²))
Water Absorption	ASTM C 209	< 0.05% volume
Service Temperature		-100° to 250° F (-73°C to 122°C)

*Also available in Grade 1 (16 psi) and Grade 3 (25 psi)

Hunter Panels Xci Foil

Polyisocyanurate Insulation Manufactured On-Line to Foil Facers

R-Value Calculation - Cavity Wall Systems Comparison			
	2" Polyiso	2.5" Polyiso	2" XPS
Inside Air Film	.68	.68	.68
8" Concrete Block	1.11	1.11	1.11
Insulation	14.40	17.80	10.00
4" Face Brick	.44	.44	.44
Outside Air Film	.17	.17	.17
Total Design R-Value	16.80	20.20	12.40

WARNINGS AND LIMITATIONS

Insulation must be protected from open flame. Hunter Panels will not be responsible for specific building design by others, for deficiencies in construction or workmanship, for dangerous conditions on the job site or for improper storage and handling. Technical specifications shown in this literature are intended to be used as general guidelines only and are subject to change without notice. Call Hunter Panels for more specific details.

INSTALLATION

Install Xci Foil between the concrete block wall and the exterior masonry. Attach insulation panels against the inner wall using construction grade adhesive or mechanical attachment. Xci Foil may also be applied directly to oil based waterproofing adhesives.

POST-INSTALLATION EXPOSURE


During the time frame between installation of Xci Foil and the application of the finished exterior cladding, it is recommended that a building wrap be applied to the Xci Foil. If a building wrap has not been specified, ALL UNFACED FOAM EXPOSED TO DIRECT DAYLIGHT (i.e. corners, window and door openings) should be taped with a compatible waterproof tape. Xci Foil is not intended to be left exposed for extended periods of time (i.e. in excess of 60 days) without adequate protection. Please contact Hunter Panels for details.

JOB-SITE STORAGE

Good construction practice dictates that all insulations should be protected from moisture and direct sunlight during job-site storage. Pallets of Hunter Panels Xci Foil are double packaged in a UV resistant polyethylene bag. This moisture resistant package is designed for protection from the elements during flat bed shipment from our factories to the job-site, and for storage on-site during phase construction. Outdoor storage for extended periods of time (i.e. in excess of 60 days) require additional breathable waterproof tarpaulins and elevated storage above ground level a minimum of 4".

Xci Foil Thermal Values		
Thickness (inches)	Thickness (mm)	R-Value*
1.00	25	6.7
1.50	38	10.5
2.00	51	14.4
2.50	64	17.8
3.00	76	21.2
3.50	89	24.6

*Initial thermal values are determined by using ASTM C 518 at 75°F mean temperature and are typical values for impermeable faced products.

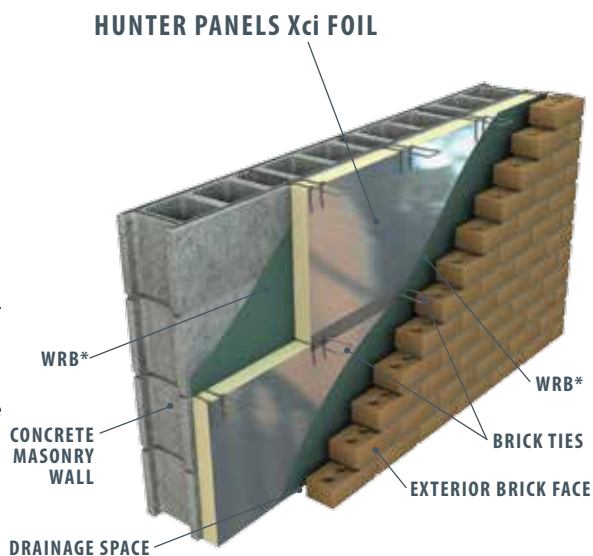

* The location and number of WRB's in the wall assembly are determined by the architect. Contact Hunter Panels for a list of approved WRB's for each assembly.



HUNTER
CONTINUOUS INSULATION

888.746.1114

www.hunterxci.com

LEED POTENTIAL CREDITS FOR POLYISO USE

Energy and Atmosphere

- Optimize Energy Performance
- Measurement & Verification

Materials & Resources

- Material Reuse
- Construction Waste Management
- Recycled Content
- Local and Regional Materials

Innovation and Design



HUNTER PANELS • Energy Smart Polyiso

NEW YORK

ILLINOIS

FLORIDA

TEXAS

UTAH

PENNSYLVANIA

WASHINGTON