



Reach it the **easy** way



LADDER GUIDE

LADDER USE SAFETY GUIDELINES

INDUSTRIAL LABEL FOR TRADE SITES

Ladders must have an “Industrial” label to be compliant for trade sites. A minimum weight rating of 150kg is recommended for trade.

SAFE ANGLE OF SLOPE

The ratio of height to horizontal distance out from the vertical support surface of any single pole or extension ladder is from 1:4 to 1:6.

LADDER USE DURATION

Ladders are to be used only for tasks of short duration which would normally be less than 10 minutes.

PLATFORM LADDERS ARE PREFERABLE

Platform ladders are recommended for tasks longer than 5 mins because they provide 3 points of contact, a stable working platform and a handrail. An AdjustaStep Platform ladder provides additional versatility with adjustable platform heights.

LADDERS ON TRADE SITES

Platform ladders are the only ladder type permissible on many worksites.

FOLD-OUT STEP/EXTENSION LADDERS

Look for trapezoidal steps on dual purpose ladders for a comfortable and rigid step in both A-Frame and single ladder positions.

LADDER COMPLIANCE

The standard of compliance for portable ladders is AS 1892.



NB. Worksite compliance and safety requirements may vary, check with your site supervisor for clarification.

180KG RATED DOUBLE SIDED STEP LADDER

- Heavy duty ladder feet - the fastest-wearing part of a ladder
- Non-clogging hinge - won't jam up with plaster spills
- Stainless steel rivets with extra large heads for maximum durability
- Internal side stay prevents damage during transport
- Replacement feet available
- Superior bracing system



LOAD
RATING

COMPLIES TO
AS/NZS
1892 : 2018

Code	Description	Height	Stance Width	Weight
OXDS02	2 Step	0.6m	0.39m	6.0Kg
OXDS03	3 Step	0.9m	0.42m	7.1Kg
OXDS04	4 Step	1.2m	0.46m	8.1Kg
OXBOH	Optional bolt on Handrail			
OXSEFT	Replacement feet (ea)			

180KG RATED DUAL PURPOSE LADDER

- Hard-wearing feet - the fastest-wearing part of a ladder
- Internally braced side arms - improves stability and doubles as a handy tool tray
- Trapezoidal back steps - comfortable to use in either 'A' shape or folded out into a single ladder configuration
- Stainless steel rivets with extra large heads for maximum durability
- Secure locking latch - guards against accidental dislodgement
- Replacement feet available



**LOAD
RATING**



**COMPLIES TO
AS/NZS
1892 : 2018**

Code	Description	Length	Stance Width	Weight
OXSE06	6 Step	1.8m - 3.3m	0.55m	11.0Kg
OXSE07	7 Step	2.1m - 3.9m	0.60m	12.0Kg
OXSE08	8 Step	2.4m - 4.5m	0.63m	13.0Kg
OXSEFT	Replacement feet (ea)			

180KG RATED TRADE SERIES PLATFORM LADDER

- Large non-slip platform surface for added safety when working at heights
- Simply folds out giving a well braced platform and folds flat for storage
- Wide, trapezoidal box step for high torsional strength
- Plastic molded handrail doubles as a handy tool tray
- Robust leg bracing for added strength and stability
- Central stay arm under platform - no pinch points
- Replacement feet available



COMPLIES TO
AS/NZS
1892 : 2018

LOAD
RATING

Code	Description	Height*	Stance Width	Overall Stile Length	Weight
OXPL02	2 Step	0.56m	0.54m	1.6m	10.4Kg
OXPL03	3 Step	0.85m	0.59m	1.9m	12.0Kg
OXPL04	4 Step	1.13m	0.63m	2.2m	14.7Kg
OXPL05	5 Step	1.41m	0.67m	2.5m	16.2Kg
OXPL06	6 Step	1.69m	0.71m	2.8m	18.2Kg
OXPL08	8 Step	2.26m	0.80m	3.4m	20.2Kg
OXPLFT	Replacement feet front (pair)				
OXPLFTR	Replacement feet rear/stair side (pair)				
OXPLFSH	Handrail				

* Heights show dimensions from floor to top of platform

200KG RATED ADJUSTASTEP TELESCOPIC PLATFORM LADDER

- Height adjustable for working off a large safe platform at variable heights. One ladder fits all!
- Set front and back stiles to varying heights for working on steps or uneven ground
- Platform heights adjusted through each ladder's range in seconds
- Handrail allows for 3 points of contact
- Large hard-wearing rubber feet for stable grip
- Rated to 200kg for industrial applications
- Once-piece, smooth operation – simply folds flat and locks
- Can be fitted with accessories – tool bucket and full surround handrail



LOAD RATING	COMPLIES TO AS/NZS 1892 : 2018
----------------	--------------------------------------



Code	Description	Height	Overall Stile Length	Weight
OXTPL03-05	3-5 Step	0.84m - 1.44m	1.90m – 2.39m	18.8Kg
OXTPL04-07	4-7 Step	1.15m - 2.02m	2.27m - 3.14m	21.1Kg
OXTPL05-09	5-9 Step	1.44m - 2.60m	2.50m – 3.49m	25.5Kg
OXPLFSH	Full surround handrail			
OXPLTT	Clip-on tool bucket			
OXTPLFF	Replacement feet front (pair)			
OXTPLFB	Replacement feet rear (pair)			

150KG RATED MULTI PURPOSE TRADE SERIES TELESCOPIC ALL IN ONE LADDER

EXTENDABLE LEGS - FOR EXTRA HEIGHT ADJUSTMENT & STAIR ACCESS

- Easily seen hinge lock - it's obvious when it's engaged
- Easily operated, heavy duty height lock
- simple pull out and release
- All-in-One - five different settings for every application
- Welded steps for superior strength and longevity
- Simple heavy duty pull out & release height lock
- Welded rungs for greater strength
- A ladder can be separated in 2x individual sections for a trestle and plank configuration



OPTIONAL CLIP-ON PLATFORM WITH TWO POSITION OPTIONS



LOAD
RATING



COMPLIES TO
AS/NZS
1892 : 2018



OXLS TRESTLE
PLANK BRACKET

Code	Description	Length	Load Rating	Weight
OXTL03	3 - 5 Step Telescopic	0.9m - 3.3m	150kg	12.0Kg
OXTL04	4 - 7 Step Telescopic	1.2m - 4.5m	150kg	15.5Kg
OXTL05	5 - 9 Step Telescopic	1.5m - 5.7m	150kg	18.0Kg
OXTLP	Clip-on Platform	N/A	N/A	N/A
OXTLFOU	Replacement feet outer L/R (pair)			
OXTLFIN	Replacement feet inner L/R (pair)			
OXLS	Trestle Plank Bracket			

135KG-150KG RATED TRADE SERIES EXTENSION LADDER

SINGLE ROPE OPERATION - LEAVES ONE HAND FREE TO SUPPORT THE LADDER WHILE IT IS ADJUSTED

- Side mounted rope - avoids tripping hazard
- Triple pulley - three times easier to lift
- Auto engaging height lock - ensuring your safety
- 'D' Shape rungs - for operator comfort
- Wide heavy duty feet for increased bearing surface and durability
- Replacement ladder feet available



COMPLIES TO
AS/NZS
1892 : 2018



LOAD
RATING




LOAD
RATING

Code	Description	Length	Load Rating	Weight
OXEL09	9 Step	2.9m - 4.7m	150Kg	13.6Kg
OXEL11	11 Step	3.45m - 6.0m	150Kg	16.3Kg
OXEL13	13 Step	4.1m - 7.2m	135Kg	18.7Kg
OXELFEET	Replacement feet (pair)			


135KG-150KG RATED TRADE SERIES EXTENSION LADDER WITH LEVELLING FEET

- Adjustable to up to 175mm variance
- Wide heavy duty feet for increased bearing surface and durability
- Simple to adjust with downward foot-force applied, till ladder foot reaches lower level
- Heavy duty stainless cable for long life
- Replacement feet available






**LOAD
RATING**



**LOAD
RATING**



**COMPLIES TO
AS/NZS
1892 : 2018**

Code	Description	Height	Load Rating	Weight
OXEL09LFT	9 Step	3.19m - 4.72m	150Kg	15.0Kg
OXEL11LFT	11 Step	3.80m - 5.93m	150Kg	18.0Kg
OXEL13LFT	13 Step	4.41m - 7.15m	135Kg	21.0Kg
OXELLFTFEET	Replacement feet (pair)			

180KG RATED WARTHOG DOUBLE SIDED WELDED STEP LADDER

FULLY WELDED STEPS - HIGH STRENGTH & SUPERIOR RIGIDITY

- Compact and lightweight but seriously tough
- Smooth locking mechanism that automatically engages when opened
- Non clogging hinge - opens up to allow dirt and plaster to fall away
- Box section stile and step - more robust and rigid
- Replacement feet available



10 YEAR WARRANTY



LOAD RATING

COMPLIES TO AS/NZS 1892 : 2018

MADE IN NEW ZEALAND ISO9001

Code	Description	Height	Stance Width	Weight
WHDS03	3 Step	0.9m	0.49m	7.3Kg
WHDS04	4 Step	1.2m	0.66m	9.9Kg
WHDS06	6 Step	1.8m	0.66m	13.6Kg
WHDS07	7 Step	2.1m	0.66m	14.2Kg
FEETCAPSWART	Replacement feet (pair)			

* Extra height models available on request as a special order

180KG RATED WARTHOG WIDE DOUBLE SIDED WELDED LADDER

- 800mm wide step provides a large surface
- Much safer and easier than a saw horse
- Smooth automatic locking mechanism
- Non clogging top step hinges
- Hollow box section stile and steps for extra strength and rigidity
- Replacement feet available



**10 YEAR
WARRANTY**



**LOAD
RATING**



**COMPLIES TO
AS/NZS
1892 : 2018**



**MADE IN
NEW ZEALAND
ISO9001**



Code	Description	Length	Load Rating	Weight
WHDS02-800	2 Step	0.6m	180Kg	10.0Kg
WHDS03-800	3 Step	0.9m	180Kg	11.0Kg
WHDS04-800	4 Step	1.2m	180Kg	12.0Kg
FEETCAPSWART	Replacement feet (ea)			

180KG RATED DUAL PURPOSE WARTHOG WELDED LADDER

FULLY WELDED - THE STRONGEST LADDER FOR THE SERIOUS TRADESMAN

- Dual purpose, fold out ladder
- No protruding hooks or snag points to catch on roof racks and get damaged
- All rungs line up to form a large flat step when folded
- Same size rungs right to the top
- Will not twist - exceptional torsional strength
- Replacement feet available



10 YEAR WARRANTY



LOAD RATING



COMPLIES TO AS/NZS 1892 : 2018



MADE IN NEW ZEALAND ISO9001

Code	Description	Length	Stance Width	Load Rating	Weight
WHSE04	4 Step	1.2m - 2.1m	660mm	180Kg	8.0Kg
WHSE05	5 Step	1.5m - 2.7m	660mm	180Kg	9.0Kg
WHSE06	6 Step	1.8m - 3.3m	660mm	180Kg	10.0Kg
WHSE07	7 Step	2.1m - 3.9m	660mm	180Kg	11.0Kg
WHSE08	8 Step	2.4m - 4.5m	660mm	180Kg	12.0Kg
WHSE09	9 Step	2.7m - 5.4m	825mm	150Kg	13.0Kg
WHSE10	10 Step	3.0m - 5.7m	825mm	150Kg	14.0Kg
FEETCAPSWART	Replacement feet (pair)				

180KG RATED WARTHOG WELDED PLATFORM LADDER

THE SAFEST CHOICE

- Large work platform - much safer and more user friendly when working for longer periods or handling bulky items
- One piece, smooth operation - simply folds out and locks
- Folds flat for storage
- Optional spring loaded wheels attach to the base to improve the mobility of the ladder
- Optional full surround handrail, with or without additional handrail on each stile - enhanced operator safety
- Centrally mounted stay arm - no more pinch points
- Replacement feet available



**LOAD
RATING**



**COMPLIES TO
AS/NZS
1892 : 2018**



**MADE IN
NEW ZEALAND
ISO9001**



**10 YEAR
WARRANTY**

Code	Description	Height*	Overall Stile Length	Load Rating	Weight
WHPL02	2 Step	0.56m	1.7m	180Kg	9.4Kg
WHPL03	3 Step	0.85m	2.0m	180Kg	11.0Kg
WHPL04	4 Step	1.13m	2.3m	180Kg	12.2Kg
WHPL05	5 Step	1.41m	2.6m	180Kg	14.1Kg
WHPL06	6 Step	1.69m	2.9m	180Kg	15.7Kg
WHPL07	7 Step	1.97m	3.2m	180Kg	17.8Kg
WHPL08	8 Step	2.26m	3.5m	180Kg	20.0Kg
WHPL09	9 Step	2.54m	3.8m	135Kg*	21.0Kg
WHPL10	10 Step	2.82m	4.1m	135Kg*	22.8Kg
FEETCAPSWART	Replacement feet (pair)				
WHPLWC	Spring Wheel to suit WHPL c/w bolts (per each wheel)				
WHPLFSH	Full Surround Handrail				

* Black support strap needed * Heights show dimensions from floor to top of platform

150KG RATED WARTHOG WELDED EXTENSION LADDER

SAFER, MORE USER FRIENDLY AND VERY STURDY

- Large comfortable step ladder style steps right to the top
- Single, one hand rope - goes through 4 pulleys giving easy one hand operation - leaving the other hand free to steady ladder
- Splayed foot for added stability
- Rope mounted on inside face of stile to avoid damage
- Automatic full width height lock - safe, secure and damage resistant
- Replacement feet available



**10 YEAR
WARRANTY**



**LOAD
RATING**



**COMPLIES TO
AS/NZS
1892 : 2018**



**LOAD
RATING**



**MADE IN
NEW ZEALAND
ISO9001**




Code	Description	Length	Load Rating	Weight
WHEL08	8 Step	2.4m - 3.6m	150Kg	14.0Kg
WHEL09	9 Step	2.7m - 4.2m	150Kg	16.0Kg
WHEL10	10 Step	3.0m - 4.8m	150Kg	18.0Kg
WHEL11	11 Step	3.3m - 5.4m	150Kg	20.0Kg
WHEL12	12 Step	3.6m - 6.0m	135Kg	22.0Kg
WHEL13	13 Step	3.9m - 6.6m	135Kg	24.0Kg
WHELFOOT	Replacement feet (ea)			


150KG RATED FIBREGLASS DOUBLE SIDED STEP LADDER

- High strength fiberglass stiles
 - **Electrically safe and non-conductive**
- Large brace members - maximum rigidity
- Replacement feet available






LOAD RATING



COMPLIES TO
AS/NZS
1892 : 2018



Code	Description	Height	Stance Width	Weight
OXDSF03	3 Step	0.9m	0.42m	7.0Kg
OXDSF04	4 Step	1.2m	0.46m	8.8Kg
OXDSF06	6 Step	1.8m	0.54m	11.0Kg
OXDSF08	8 Step	2.4m	0.62m	13.0Kg
OXSEFT	Replacement feet (ea)			

150KG RATED FIBREGLASS PLATFORM LADDER

- Large anti-skid work platform with raised edges - keeps feet inside the platform for greater safety and comfort
- Braced platform and folds flat for storage
- Welded back leg bracing - much greater rigidity, safety, durability
- Optional bolt on handrail and gate - full surround safety
- Fibreglass - **Electrically safe and non-conductive**
- Replacement feet available



LOAD
RATING



COMPLIES TO
AS/NZS
1892 : 2018



Code	Description	Height*	Stance Width	Overall Stile Length	Weight
OXPLF02	2 Step	0.56m	0.54m	1.6m	9.3Kg
OXPLF03	3 Step	0.85m	0.59m	1.9m	10.7Kg
OXPLF04	4 Step	1.13m	0.63m	2.2m	11.8Kg
OXPLF06	6 Step	1.69m	0.71m	2.8m	16.5Kg
OXPLF08	8 Step	2.26m	0.80m	3.4m	20.2Kg
OXPLFFEET	Replacement feet front (pair)				
OXPLFFEETR	Replacement feet rear/stair side (pair)				

* Heights show dimensions from floor to top of platform

150KG RATED FIBREGLASS DUAL PURPOSE LADDER

STEP LADDER / EXTENSION LADDER

- Hard-wearing feet - the highest wearing part of a ladder
- Internally braced side stay arms - much more stable
- Trapezoidal back steps - comfortable to use in the 'A' shape or folded out
- Stainless steel rivets with extra large heads for maximum durability
- Secure locking latch - guards against accidental dislodgement
- Fibreglass - **Electrically safe and non-conductive**
- Replacement feet available



LOAD
RATING

COMPLIES TO
AS/NZS
1892 : 2018

Code	Description	Length	Stance Width	Weight
OXDPF06	6 Step	1.8m - 3.2m	0.55m	12.9Kg
OXDPF07	7 Step	2.1m - 3.9m	0.60m	14.7Kg
OXDPF08	8 Step	2.4m - 4.5m	0.63m	16.9Kg
OXSEFT	Replacement feet (ea)			

150KG RATED ADJUSTASTEP TELESCOPIC FIBREGLASS PLATFORM LADDER

- **Electrically safe** Non conductive fibreglass stiles
- Height adjustable for working off a large safe platform at variable heights in seconds
- Set front and back stiles to varying heights for working on steps or uneven ground
- Handrail allows for 3 points of contact
- Large, hard-wearing rubber feet for stable grip
- Rated to 150kg for industrial applications
- One-piece, smooth operation – simply folds flat and locks
- Can be fitted with standard Adjustastep accessories – tool bucket, wheels and full surround handrail



**LOAD
RATING**

**COMPLIES TO
AS/NZS
1892 : 2018**

Code	Description	Height	Overall Stile Length	Weight
OXTPLF04-07	4-7 Step	1.2m - 2.0m	2.3m - 3.1m	30Kg
OXTPLFF	Replacement feet front (pair)			
OXTPLFB	Replacement feet rear (pair)			

150KG RATED MULTI PURPOSE TRADE SERIES FIBREGLASS TELESCOPIC ALL IN ONE LADDER

EXTENDABLE LEGS - FOR EXTRA HEIGHT ADJUSTMENT & STAIR ACCESS

- **Electrically safe** Non conductive fibreglass stiles
- Easily seen hinge lock - it's obvious when it's engaged. Locks automatically
- Easily operated, heavy duty height lock - simple pull out and release
- All-in-One - four different settings for every application
- Rungs are attached to stiles with Titan tough rivets for superior strength and longevity



COMPLIES TO
AS/NZS
1892 : 2018



LOAD
RATING



Code	Description	Length	Load Rating	Weight
OXTLF04	4 - 7 Step Telescopic	1.2m - 4.5m	150kg	20.5Kg
OXTLP	Clip-on Platform	N/A	N/A	N/A
OXTLFOU	Replacement feet outer L/R (pair)			
OXTLFIN	Replacement feet inner L/R (pair)			

135KG - 150KG RATED FIBREGLASS EXTENSION LADDER

SINGLE ROPE OPERATION - LEAVES ONE HAND FREE TO SUPPORT THE LADDER WHILE IT IS ADJUSTED

- Side mounted rope - avoids tripping hazard
- Triple pulley - three times easier to lift
- Auto engaging height lock - ensuring your safety
- Heavy duty feet - resists wear
- 'D' Shape rungs - for comfortable standing
- Fibreglass - **Electrically safe and non-conductive**
- Replacement feet available



LOAD
RATING



COMPLIES TO
AS/NZS
1892 : 2018



LOAD
RATING




Code	Description	Length	Load Rating	Weight
OXELF09	9 Step	2.8m - 4.7m	150Kg	13.1Kg
OXELF11	11 Step	3.5m - 6.0m	150Kg	15.6Kg
OXELF13	13 Step	4.1m - 7.2m	135Kg	18.1Kg
OXELFFEET	Replacement feet (pair)			

150KG RATED ROOF LADDER

SAFELY CLIMB TO THE APEX OF A PITCHED ROOF

- Safe access to any roof with a pitch of up to 45 degrees
- Easy and efficient solution for roof painting and maintenance
- Simply slide the ladder on rollers and flip over to secure the hooks over the apex
- Foamed support pads maintain even and secure contact between the ladder and roof
- Foam buffer on hook absorbs any movement and protects the roof from damage
- Replacement feet available

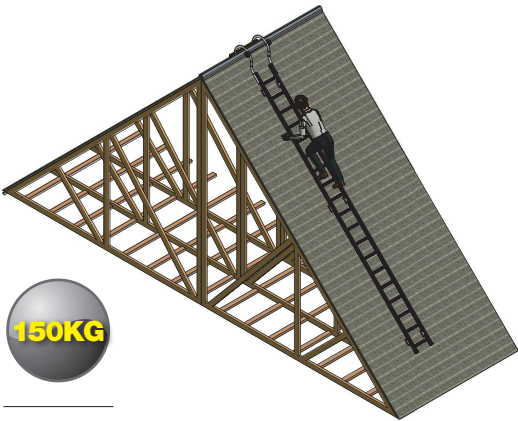



LOAD
RATING



Code	Description	Length	Load Rating
CSRL3.0	Roof Ladder	3.0m	150Kg
CSRL3.6	Roof Ladder	3.6m	150Kg
CSRL4.8	Roof Ladder	4.8m	150Kg
CSRL5.4	Roof Ladder	5.4m	150Kg
CSRL6.0	Roof Ladder	6.0m	150Kg
CSLFEET	Replacement feet (pair)		

150KG RATED SINGLE LADDER

- Heavy duty 150kg rated
- Comfortable 'D' shaped rung
- Good value for money
- Lightweight and easy to use
- Replacement feet available

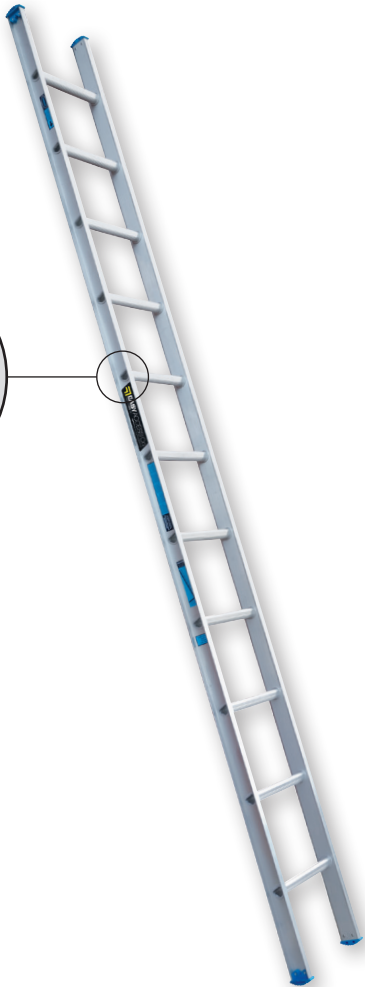

**LOAD
RATING**




**COMPLIES TO
AS/NZS
1892 : 2018**

Code	Description	Length	Load Rating
CSL3.0	Aluminium Straight Ladder	3.0m	150Kg
CSL3.6	Aluminium Straight Ladder	3.6m	150Kg
CSL4.8	Aluminium Straight Ladder	4.8m	150Kg
CSL5.4	Aluminium Straight Ladder	5.4m	150Kg
CSLFEET	Replacement feet (pair)		

150KG RATED WELDED 'D' STILE SINGLE SCAFFOLD LADDER

- Welded rungs for extra strength and rigidity
- D-Stiles - can be attached to scaffolding using standard fittings
- Flat based rubber feet - superior grip in harsh trade environments
- Replacement feet available



**LOAD
RATING**



COMPLIES TO
AS/NZS
1892 : 2018



MADE IN
NEW ZEALAND
ISO9001

Code	Description	Length	Load Rating
DSL3.0	Welded Scaffold Ladder	3.0m	150Kg
DSL3.6	Welded Scaffold Ladder	3.6m	150Kg
DSL4.8	Welded Scaffold Ladder	4.8m	150Kg
DSL5.4	Welded Scaffold Ladder	5.4m	150Kg
PLC4.8	Putlog Coupler		
DSLFEET	Replacement feet (pair)		

* Only suitable with Handrail and Safety Gate Set

250KG RATED EASYSTEP - SAFETY STEP ORANGE

- 505mm x 505mm x 365mm(h)
- Huge 250kg Safe Working Load
- Indented steps on all four sides
- Improved grip tape for even greater stability
- Same reinforced underside for extra strength



LOAD
RATING



120KG RATED LIGHT INDUSTRIAL AND DOMESTIC LADDER

- Tested and certified to AS/NZS 1892 : 2018
- Huge 120kg trade load rating
- High strength, lightweight, powder coated steel construction
- Wide steps for operator safety and comfort
- Can be used in commercial applications
- Slimline; folds flat for easy storage
- Ergonomic rubber coated hand-grip for easy handling
- Replacement feet available
- Large, non marking leg caps for superior stability and traction
- Strongest ladder in this class in NZ!
- Handy locking device ensures the ladder will not close accidentally
- Cost effective; all the features of a trade ladder at an affordable price!
- The must have ladder for your kitchen, workshop, warehouse, garage, office, house and garden maintenance tasks



LOAD
RATING



COMPLIES TO
AS/NZS
1892 : 2018

Code	Description	Length	Load Rating	Weight
OXDL02	2 Step	920mm	120Kg	5.1Kg
OXDL03	3 Step	1170mm	120Kg	6.7Kg
OXDL04	4 Step	1400mm	120Kg	8.2Kg
OXDLFT	Replacement feet (pair)			

WARTHOG ACCESSORIES


- Optional full surround handrail folds flat for storage
- Optional spring loaded wheels for mobility
- Designed to easily roll on hard floors
- Ideal for a warehouse situation



Code	Description
WHPLWC	Spring Wheel to suit WHPL c/w bolts (per each wheel)
WHPLFSH	Full Surround Handrail

ADJUSTASTEP LADDER ACCESSORIES


- Chunky wheel designed to handle uneven ground
- New product - bolt on wheels
- Makes repositioning easy
- Optional full surround handrail
- Optional clip-on tool bucket



Code	Description
OXTPLWSET	OXTPL wheel set
OXPLFSH	Full surround handrail
OXPLTT	Optional Clip-on tool bucket

TELESCOPIC LADDER ACCESSORIES

- Ladder brackets to transform your Telescopic Ladder into two separate sections able to support a plank

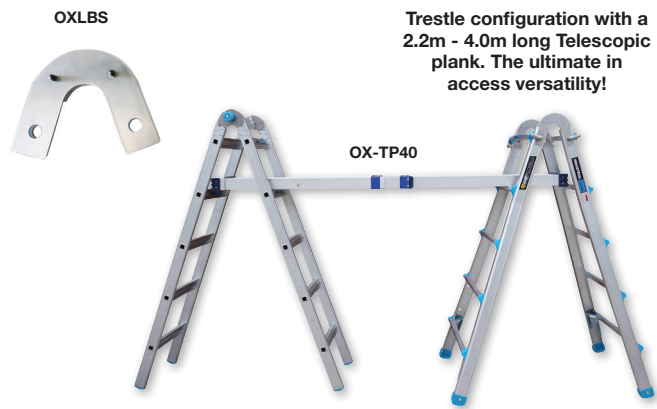

Code	Description
OXLBS	Ladder Plank Bracket
OX-TP40	Telescopic Plank

DOUBLE SIDED STEP LADDER ACCESSORIES

- Optional bolt on handrail



Code	Description
OXBOH	Optional bolt on Handrail

225KG RATED QUICKLATCH WORKHORSE

- Folds to an easily stored saw horse - takes 85% less room to store than a fixed leg version
- Simple locking legs for total safety
- Zinc coated for rust protection
- Half the weight of a wooden sawhorse
- Load capacity 225kg



LOAD
RATING

Code	Description	Height	Length	Weight
WQLL	Quicklatch Workhorse	700mm	900mm	6.5Kg
WQLL/2	Quicklatch Workhorse Set of 2	700mm	900mm	13.0Kg

150KG RATED FOLDING ALUMINIUM WORK PLATFORM

- Lightweight and quick to assemble and move around
- Fold away legs for easy transport and storage
- Positive locking hinges with safety catch lock
- Anti-slip feet for added stability
- Perfect for low level decorating and standard height ceiling work
- Optional handrail fits either side for OXWP03W only
- Replacement feet available



HANDRAIL
OXWP03WHR
(only fits OXWP03W)




LOAD
RATING



Code	Description	Height	Length	Width
OXWP02	Folding Work Platform	500mm	850mm	300mm
OXWP03	Folding Work Platform	900mm	850mm	300mm
OXWP03W	Wide Folding Work Platform	900mm	850mm	450mm
OXWP03WHR	Handrail - OXWP03W only	900mm	N/A	N/A
OXWPFEEET	Replacement feet (ea)			

HEIGHT ADJUSTABLE WORK PLATFORMS

- 6 height settings 600mm - 850mm
- Each leg independently adjustable for uneven ground
- Lightweight and folds flat for easy store
- Available with 1250mm and 850mm long platform
- Optional guardrail available
- 450mm wide platforms for safety and efficiency
- Replacement feet available
- Independently adjustable legs through 6 height settings



LOAD
RATING

Code	Description	Height	Length	Width
ADJWP120	3 step Work platform	0.6m - 0.85m	1250mm	450mm
ADJWP085	3 step Work platform	0.6m - 0.85m	850mm	450mm
OXWPFEEET	Replacement feet (ea)			



*Reach it the **easy** way*

FREEPHONE 0800 394 222

P +64 9 431 1055

F +64 9 431 8110

www.easyaccess.co.nz