


Sanitary Tri-Clamp Gaskets Spec Sheet

— PTFE Tri Clamp Gasket



PTFE Sanitary Gaskets are the material of choice where low temperature flexibility and hygienic seal memory are not required. We don't recommend using PTFE Sanitary Gaskets where large temperature variations frequently occur because the affect on the PTFE's density makes joints more prone to leakage. With that said we recommend using high pressure clamps to help negate the affects of any temperature fluctuations. From a chemical standpoint PTFE has good stability, almost no extractables, a low absorption rate, and excellent resistance to process fluids. These PTFE Gaskets can remain in service for long periods of time in both water and steam applications.

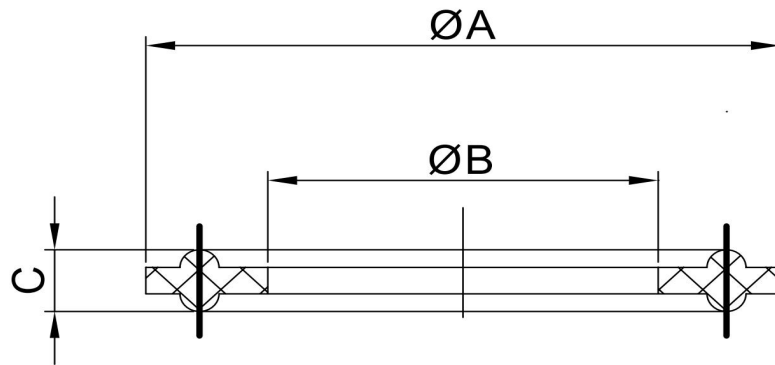

Material: PTFE

Temp. Range: -58°F~302°F

SKU	SIZE	ØA		ØB		C	
		in	mm	in	mm	in	mm
EXA-Gasket-PTFE-1.5IN	1 1/2"	1.988	50.5	1.378	35	0.189	4.8
EXA-Gasket-PTFE-2IN	2"	2.520	64	1.890	48	0.189	4.8
EXA-Gasket-PTFE-3IN	3"	3.583	91	2.835	72	0.189	4.8
EXA-Gasket-PTFE-4IN	4"	4.685	119	3.858	98	0.189	4.8
EXA-Gasket-PTFE-6IN	6"	6.575	167	5.827	148	0.189	4.8
EXA-Gasket-PTFE-8IN	8"	8.543	217	7.874	200	0.189	4.8
EXA-Gasket-PTFE-10IN	10"	10.551	268	9.764	248	0.189	4.8
EXA-Gasket-PTFE-12IN	12"	12.559	319	11.732	298	0.189	4.8

Hardware Factory Store Inc.

1029 N Todd Ave. Azusa, CA 91702

TEL: 626.332.7744

E-MAIL: info@hfsusa.com

WEBSITE: <https://hardwarefactorystore.com/>

 **HFS**
www.HardwareFactoryStore.com