


# Specification Sheet

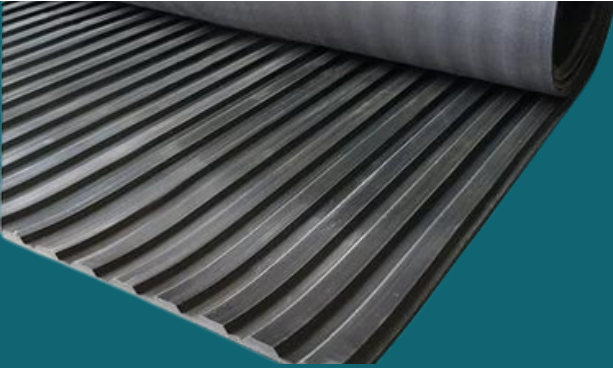

Our versatile fine ribbed rubber matting features a textured surface with flutes on top and a cloth-like underside. Crafted from Natural/SBR rubber, this 3mm thick matting provides slip resistance, making it ideal for various applications like work bench mats, light-duty walkways, steps, and case inserts. Choose from a range of lengths to suit your needs.

## PHYSICAL PROPERTIES

<b>COLOUR:</b>	<b>BLACK</b>	
<b>ELASTOMER:</b>	<b>WIDE FLUTED</b>	
<b>HARDNESS SHORE A+5</b>	<b>70</b>	<b>ISO7619-1</b>
<b>SG (g/cm<sup>3</sup>):</b>	<b>1.5</b>	<b>ISO2781</b>
<b>TENSILE:</b>	<b>3.5</b>	<b>ISO37</b>
<b>ELONGATION %:</b>	<b>300</b>	<b>ISO37</b>
<b>COMPRESSION %:</b>	<b>43</b>	<b>ISO37</b>
<b>TEAR STRENGTH:</b>	<b>12</b>	<b>ISO34-1</b>
<b>ABRASION MM3:</b>	<b>480</b>	<b>ISO37</b>
<b>TEMPERATURE FROM (DEG C)</b>	<b>-20</b>	
<b>TEMPERATURE TO (DEG C)</b>	<b>70</b>	

## THICKNESSES

0.5– 1mm	+/- 0.2mm
1.5mm –3mm	+/- 0.3mm
4mm—5mm	+/- 0.4mm
6mm	+/- 0.5mm
8mm	+/- 0.7mm
10mm—15mm	+/- 1mm
20mm	+/- 1.4mm
25mm	+/- 1.75mm

## ROLL TOLERANCES

Width tolerance:	+/- 2%	ISO 3302 SW1
Length tolerance:	+/- 2%	ISO 3302 SW1

### QUALITY ASSURED PRODUCTS WITH FULL TRACEABILITY

Care should be taken in selecting the most suitable quality for each application. Advice is available but final responsibility remains with the customer.