


**NEOPRENE FIRE
RESISTANT
CR/SBR**

Specification Sheet

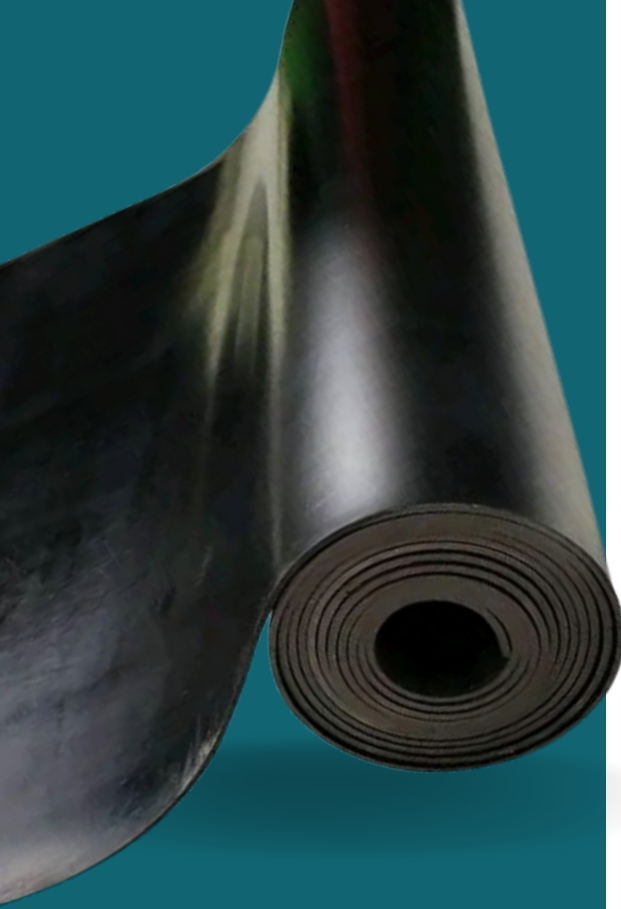

About the Product

Good strength and suitability for minor mechanical applications. Moderately resistant to weathering and oxidative ageing. Resistant to some inorganic salts and acids and ozone. Flame retardant. Moderate resistance to petroleum based products other than aromatic and halogenated hydrocarbons.

| | |
|-------------------------------|---------------------------------|
| Grade: | C34 |
| Elastomer : | CR/SBR |
| Colour: | BLACK |
| Quality: | FLAME RETARDANT |
| Hardness Shore: | A ±5: 70° ISO 7619-1 |
| SG (g/cm²): | 1.47 ISO 2781 |
| Elongation % : | 300% ISO 37 |
| Compression: % : | 40% ISO 37 |
| Tear Strength: | 20 ISO 34-1 |
| Abrasion: | 200mm³ ISO 37 |
| Temperature: | From -30 to 120° c |

Thicknesses

| | |
|------------|------------|
| 0.5– 1mm | +/- 0.2mm |
| 1.5mm –3mm | +/- 0.3mm |
| 4mm–5mm | +/- 0.4mm |
| 6mm | +/- 0.5mm |
| 8mm | +/- 0.7mm |
| 10mm–15mm | +/- 1mm |
| 20mm | +/- 1.4mm |
| 25mm | +/- 1.75mm |

Roll Intolerances

Width tolerance: ISO 3302 SW1
Length tolerance: ISO 3302 SW1

QUALITY ASSURED PRODUCTS WITH FULL TRACEABILITY

Care should be taken in selecting the most suitable quality for each application. Advice is available but final responsibility remains with the customer.