

US RING SIZE GUIDE


BEFORE YOU BEGIN, MAKE SURE THIS GUIDE IS PRINTED IN US LETTER SIZE AT 100%. You can check the accuracy of your print by positioning a credit card on the line to the right or by placing the correct coin in one of the labeled ring sizes below. Alternatively, you can measure the line below using a ruler and it should read exactly 3 3/8 in or 85.6 mm long.

3 3/8 in or 85.6 mm

PLACE CREDIT CARD HERE

OPTION 1: MEASURE BY MATCHING YOUR RING

To find your ring size, use an existing ring that fits you well. Match the inside of that ring with one of the circles below. When your ring has been placed on the right size, you should see only the white circle—with no blue space inside of your ring. If your ideal fit falls between two sizes, please order the corresponding quarter size (i.e. size 6.75 if you are between 6.5 and 7).

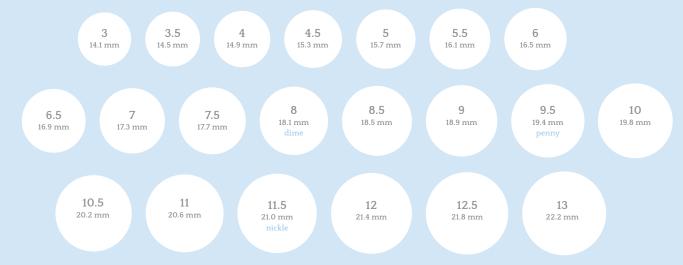

OPTION 2: CREATE YOUR OWN RING SIZER

After you cut out the ruler, carefully cut the line to create a slit. Wrap the ruler around your finger at the base and pull the tapered end through the slit. To make sure the ring will fit comfortably, we suggest also measuring your knuckle.

We recommend selecting a size that goes on and off your finger easily.





INTERNATIONAL RING SIZE CONVERSION GUIDE

Circumference (mm)	Diameter (mm)	US & Canada	UK & Australia	Europe	Switzerland	Germany	China	Hong Kong	Singapore & Japan
44.2	14.1	3	F 1/2	44	4	14	6	6	4
44.8	14.3	3.25	G	45	5 1/4	14 1/4			5
45.5	14.5	3.5	G 1/2			14 1/2	6.5	7	
46.1	14.7	3.75	Н	46	6 1/2	14 3/4			6
46.8	14.9	4	H 1/2	47		15	7.5	8	7
47.4	15.1	4.25	I		7 3/4				
48.0	15.3	4.5	I 1/2	48		15 1/4	8	9	8
48.7	15.5	4.75	J		9	15 1/2	9.5	10	
49.3	15.7	5	J 1/2	49		15 3/4			9
50.0	15.9	5.25	K	50	10	16	10	11	
50.6	16.1	5.5	K 1/2			16 1/4			10
51.2	16.3	5.75	L	51	11 3/4		11	12	
51.9	16.5	6	L1/2	52	12 3/4	16 1/2	12	13	11
52.5	16.7	6.25	M			16 3/4			12
53.1	16.9	6.5	M 1/2	53	14	17	13	14	13
53.8	17.1	6.75	N						
54.4	17.3	7	N 1/2	54	15 1/4	17 1/4	14	15	14
55.1	17.5	7.25	0	55		17 1/2	14.5	16	
55.7	17.7	7.5	O 1/2		16 1/2	17 3/4			15
56.3	17.9	7.75	P	56		18	15.5	17	
57.0	18.1	8	P 1/2	57	17 3/4				16
57.6	18.3	8.25	Q			18 1/4	17	18	
58.3	18.5	8.5	Q 1/2	58		18 1/2			17
58.9	18.8	8.75	R	59	19	18 3/4	18	19	
59.5	19.0	9	R 1/2			19	18.5	20	18
60.2	19.2	9.25	S	60	20 1/4	19 1/4			
60.8	19.4	9.5	S 1/2	61		19 1/2	20	21	19
61.4	19.6	9.75	T		21 1/2				
62.1	19.8	10	T 1/2	62		19 3/4	20.5	22	20
62.8	20.0	10.25	U			20			21
63.4	20.2	10.5	U 1/2	63	22 3/4		21.5	23	22
64.0	20.4	10.75	V	64		20 1/2	22.5	24	
64.6	20.6	11	V 1/2			20 3/4			23
65.3	20.8	11.25	W	65	25		23.5	25	
65.9	21.0	11.5	W 1/2	66		21			24
66.6	21.2	11.75	X			21 1/4	25	26	
67.2	21.4	12	X 1/2	67	27 1/2	21 1/2	25.5	27	25
67.8	21.6	12.25	Y						
68.5	21.8	12.5	Z	68	28 3/4	21 3/4			26
69.1	22.0	12.75	Z 1/2	69					
69.7	22.2	13		70		22			27
70.4	22.4	13.25	Z + 1						
71.0	22.6	13.5	Z + 2						