



INNOVATIVE
COMPONENTS

Standard Single Level – Polypropylene

Ideal for low cost high volume use, offers high reliability and compact size. Broad compatibility with various chemicals, water, and oils makes plastic the material of choice for the OEM.



LS-14-180



LS-14-190



LS-208




LS-15-160



LS-204






LS-209

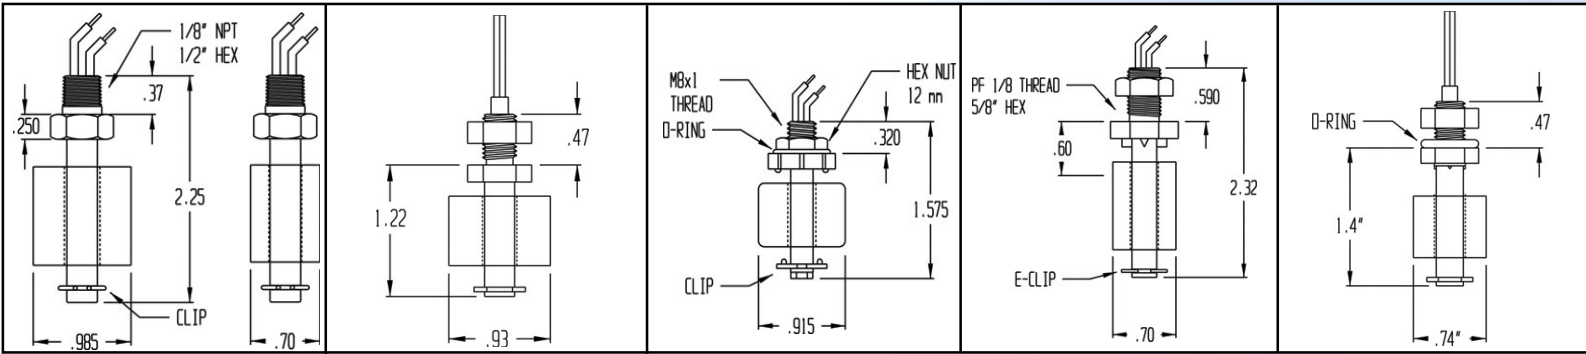

-Units are shipped N.O. unless otherwise specified. Switch state can be changed from N.O. to N.C. by inverting the float on the stem.
(N.O.- Normally Open - N.C.- Normally Closed)
-UL Recognized - File# E177423

Color Code

Contact Rating	Type	Max Switching Voltage	Max Switching Current
70 VA / 50 W	SPST	150 VAC / 200 VDC	0.7A AC / 1.0A DC
100 VA	SPST	300 VAC / 350 VDC	1.0A AC / 2.5A DC
3 VA	SPDT	100 VAC / DC	0.25A AC/DC
50 VA	SPST	220 VDC	1.5 A
10 VA	SPST	200 VDC	0.5 A



Part#	Material	Reed Switch	S.G	Max Pressure	Operating Temp	Lead Wires
LS-14-181/2	Polypropylene	70 VA SPST	.70	150 PSI	-40 TO 212°F	20 awg PVC 24"
LS-14-183/4		100 VA SPST				
LS-14-185		3 VA SPDT				
LS-14-191/2	Polypropylene	70 VA SPST	.80	150 PSI	-40 TO 212°F	20 awg PVC 24"
LS-14-193/4		100 VA SPST				
LS-14-195		3 VA SPDT				
LS-208	Polypropylene W/ 304SS clip	50 VA SPST	.60	150 PSI	-15 TO 175°F	22 awg PVC 11.8"
LS-15-161	Retainer: Polyacetal Stem: Noryl Float: Polypropylene, O-Ring: Nitrile Rubber	10 VA SPST - N.O.	.69	150 PSI	-15 TO 175°F	22 awg Vinyl 11.8"
LS-15-162		10 VA SPST - N.C.				
LS-204	Polypropylene	50 VA SPST	.80	150 PSI	-40 TO 212°F	22 awg PVC 11.8"
LS-209	Polypropylene	50 VA SPST	.80	25 PSI	-40 TO 194°F	22 awg PVC 19"

Your Single Source for Float Type Level Switches



Manufacturer of
**Liquid Level
Switches**

384 Old Turnpike Road
Southington, Ct 06489

PH:860.621.7220
FX:860.620.0288
www.liquidlevel.com