




# Thermataper® TT46 Systems

Insulation for Flat Roofs Waterproofed with Mechanically Fixed Single-ply Waterproofing

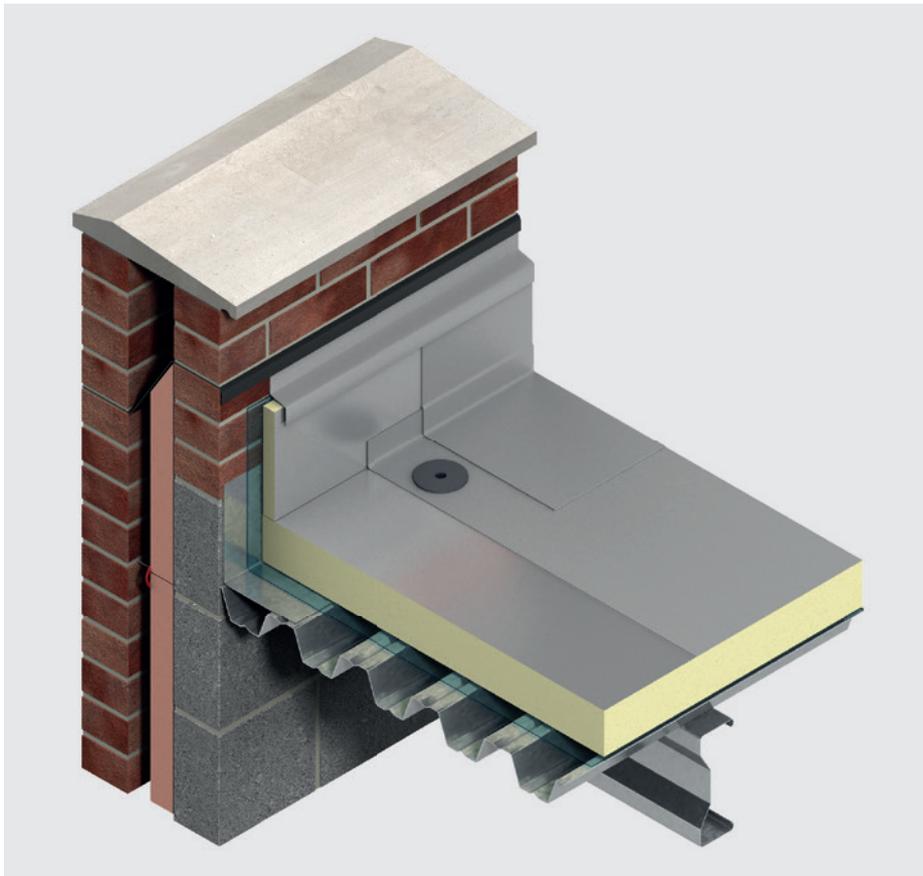

- For FM Approval see page 12
- Insulation and drainage in one
- Fully compatible with most mechanically fixed single-ply waterproofing systems
- Provides a practical alternative to screeding, structural falls or firrings
- Load bearing implications for an existing structure can be minimal
- Resistant to the passage of water vapour
- Easy to handle and install
- Ideal for new build and refurbishment
- Non-deleterious material
- Manufactured with a blowing agent that has zero ODP and low GWP

---

# Design Considerations

---

## Design Services

### Efficiency by Design

Kingspan Thermataper® TT46 Systems come with a supporting design service. This ensures that the most cost-effective solution for a roof is identified and that the end result is a tapered system design which meets the roof's rainwater run-off and insulation requirements.

### Board Layout & Falls Design

The design of the board layout and falls of a successful Kingspan Thermataper® TT46 System must take several factors into account:

- the position of the roof outlets;
- the extent of water run-off required;
- the dimensions of the roof;
- the presence of any existing falls or steps on the roof; and
- the location and dimensions of permanent projections such as roof lights, vents etc., and perimeter restrictions.

Normally, for new roofs, this information can be most simply acquired from an architect's drawing. On existing roofs, a free survey of the roof will be carried out by one of our experienced surveyors to collect the required information.

Kingspan Thermataper® TT46 Systems are flexible enough to be used for any design requiring a fall to perimeter gutters, valley gutters, or to any other outlet or location. Existing structures on the roof such as roof lighting or equipment can easily be accommodated into the design.

The board layout and falls of even the most complex tapered system can be designed quickly and effectively, ready for client approval. The design will illustrate the required direction of drainage and will also take into account U-value requirements, condensation risk and minimum / maximum rise restrictions. Client amendments or revisions can be easily incorporated. This service operates under a quality control system certified to ISO 9001: 2015 (Quality Management Systems. Requirements).

Once the final design has been accepted by the client and the Kingspan Thermataper® TT46 System is ordered, a working drawing will be produced on waterproof paper. This drawing will clearly set out the fall pitch, fall direction and fixing of each board type, and will clearly match the markings on the boards. Installation of Kingspan Thermataper® TT46 Systems is simple using these easy to follow drawings and, to facilitate installation, each board type is packed separately in labelled shrink wrapped packs.

### Condensation Risk Analysis

Included in the design service is the calculation of condensation risk in accordance with BS 5250: 2011 + A1: 2016 (Code of practice for control of condensation in buildings). This ensures that any predicted dew point is above the vapour control layer at the point of minimum thickness of the Kingspan Thermataper® TT46 System, whilst also ensuring any condensation risk is within the limits given in BS 5250: 2011 + A1: 2016.

### Calculation of U-values

Kingspan Thermataper® TT46 Systems can easily meet the U-values required for compliance with Building Regulations / Standards.

A detailed U-value calculation together with condensation risk analysis should be completed for each individual project. Please consult the Kingspan Insulation Tapered Roofing Department (see rear cover) for assistance.

U-values for Kingspan Thermataper® TT46 Systems are calculated, under a management system certified to the BBA Scheme for Assessing the Competency of Persons to Undertake U-value and Condensation Risk Calculations, in accordance with Annex E of BS EN ISO 6946: 2017 (Building components and building elements. Thermal resistance and thermal transmittance. Calculation methods).



---

## Linear Thermal Bridging

### Basic Principles

Linear thermal bridging describes the heat loss / gain that occurs at junctions between elements e.g. where an external wall meets the roof, or at junctions around openings in the building fabric where the thermal insulation layer is discontinuous e.g. sills, jambs and lintels.

Interruptions within the insulation layer by materials with poorer insulating properties can result in a thermal bridge, which in turn can lead to problems of condensation and mould growth, especially if there is a drop in surface temperature.

The heat flow at these junctions and opening locations, over and above that through the adjoining plane elements, is the linear thermal transmittance of the thermal bridge: measured in W/mK; referred to as a 'psi-value'; and expressed as a ' $\psi$ -value'.

The lower the  $\psi$ -value, the better the performance.  $\psi$ -values are taken into account in the calculation methodologies e.g. the Standard Assessment Procedure (SAP) that are used to assess the operational CO<sub>2</sub> emissions and, where applicable, the fabric energy efficiency of buildings.

$\psi$ -values can comprise either, or a combination of, approved, calculated or assumed values.

---

# Design Considerations

---

## Reducing Linear Thermal Bridging

Detailing at junctions to minimise the effects of thermal bridging and the associated risk of condensation or mould growth is important and there are some simple design considerations that can be adopted to help mitigate the risks and to reduce heat losses.

- Care is required to ensure continuation of insulation wherever possible between the wall and roof for best thermal performance. Where this is not possible, the roof and wall insulation should be overlapped and ideally, insulation material introduced between.
- Parapet detailing can represent a good, low heat loss approach, with insulation continuity maintained using an insulated upstand to reduce cold bridging. A minimum 25 mm thick Kingspan Thermarook® TR26 upstand should be used around the perimeter of the roof on the internal façade of parapets. The upstand should extend a minimum of 150 mm above the roof insulation and achieve a minimum distance of 300 mm between the top of the insulation upstand and the bottom of the horizontal roof insulation. Wall insulation should be carried up into parapets at least as high as the flat roof insulation upstand.
- Lightweight aggregate blockwork to the inner leaf of wall constructions can help to improve thermal performance at junctions generally and where used for the inner leaf of parapet walls it can help to reduce losses.
- Where a parapet construction is not used, to achieve best performance, the roof insulation should be carried over the wall plate to meet and extend past the wall insulation layer. For a timber warm roof construction, the first joist zone above the wall plate can be filled with insulation for best performance and to maintain thermal continuity.
- For best thermal performance, roof-lights and ventilator kerbs should be insulated with the same thickness of Kingspan Thermataper® TT46 as the general roof area.
- Where guttering is incorporated within a flat roof construction, this should be accounted for within the overall thermal design of the roof via an area-weighted calculation for the whole roof; the risk of localised interstitial condensation from reduced insulation provision at the gutter should be considered.

## Responsible Sourcing

All elements of Kingspan Thermataper® TT46 Systems produced at Kingspan Insulation's Pembridge, Herefordshire and Selby, North Yorkshire manufacturing facilities are certified to BES 6001 (Framework Standard for the Responsible Sourcing of Construction Products) 'Excellent'.



NB The above information is correct at the time of writing. Please confirm at the point of need by visiting the Kingspan Insulation website (see rear cover) from which copies of Kingspan Insulation's certificates can be obtained.

## Sustainability & Responsibility

Kingspan Insulation has a long-term commitment to sustainability and responsibility: as a manufacturer and supplier of insulation products; as an employer; as a substantial landholder; and as a key member of its neighbouring communities.

A report covering the sustainability and responsibility of Kingspan Insulation Ltd's operations at its Pembridge, Herefordshire and Selby, North Yorkshire manufacturing facilities is available at [www.kingspaninsulation.co.uk/sustainabilityandresponsibility](http://www.kingspaninsulation.co.uk/sustainabilityandresponsibility).

## Specification Clause

Kingspan Thermataper® TT46 should be described in specifications as:

The roof insulation shall be Kingspan Thermataper® TT46 comprising a high performance fibre-free rigid thermoset insulation core faced on both sides with a low emissivity composite foil facing. The product shall be manufactured: with a blowing agent that has zero Ozone Depletion Potential (ODP) and low Global Warming Potential (GWP); in accordance with the requirements of BS 4841-3; under a management system certified to ISO 9001: 2015, ISO 14001: 2015, BS OHSAS 18001: 2007 and ISO 50001: 2011; by Kingspan Insulation Limited; and installed in accordance with the instructions issued by them.

# Design Considerations

## Timber Deck

### Timber Deck with Plasterboard Ceiling

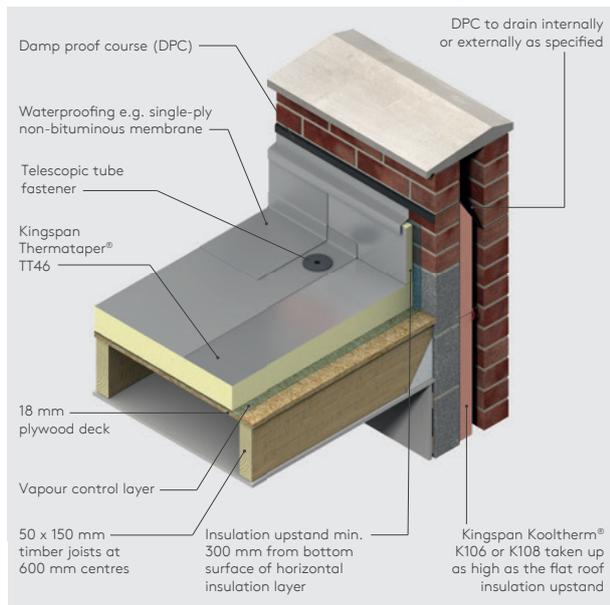


Figure 1

## Metal Deck

### Metal Deck with No Ceiling

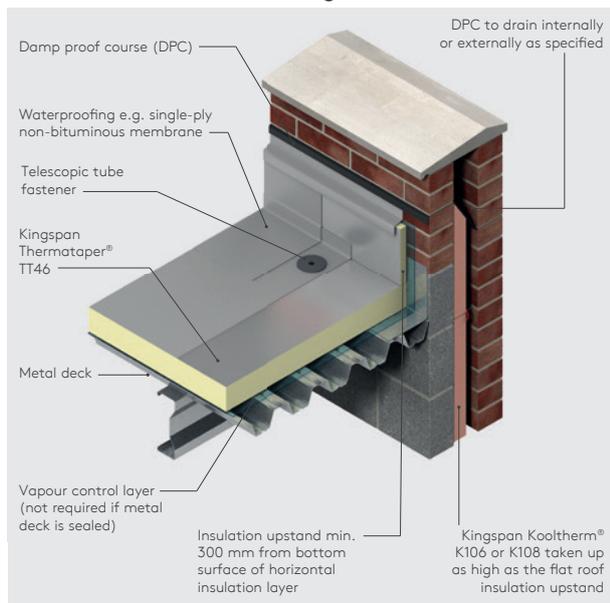


Figure 2

## NBS Specifications

Details also available in NBS Plus.  
NBS users should refer to clause(s):  
J42 420, J42 430 (Standard and Intermediate)  
J42 10 (Minor Works)



## Wind Loadings

Wind loadings should be assessed in accordance with BS EN 1991-1-4: 2005 + A1: 2010 (National Annex to Eurocode 1 Actions on Structures. General Actions. Wind Actions) taking into account:

- length / width / height of the building;
- orientation of the building;
- wind speed;
- aspect (e.g. on a hill side); and
- topographical value of the surrounding area.

## Roof Waterproofing

Kingspan Thermataper® TT46 Systems are suitable for use with most mechanically fixed single-ply waterproofing membranes.

NB Kingspan Thermataper® TT46 Systems are not suitable for use with bitumen based built-up waterproofing systems or mastic asphalt. Kingspan Thermataper® TT47 Systems can be used instead in these applications.

## Water Vapour Control

Kingspan Thermataper® TT46 Systems should be installed over a separate vapour control layer, in new build roofs, unless it is being used in conjunction with a sealed metal deck. Regardless of the deck type it is recommended that a condensation risk analysis is carried out for every project.

For refurbishment projects, involving the addition of insulation to existing insulated flat roofs, or roofs constructed of insulated steel faced composite panels, it is imperative that a U-value calculation and condensation risk analysis is carried out for every project, in order to ensure that the correct thickness of insulation is installed to achieve the required thermal performance, whilst avoiding interstitial condensation.

In refurbishment projects, where Kingspan Thermataper® TT46 Systems are to be installed over an existing bituminous waterproofing membrane, the membrane can be used as a vapour control layer, as long as it is in a good water-tight condition. Where this is not the case, a separate vapour control layer should be installed.

A minimum separate vapour control layer should consist of a 1000 gauge (250 micron) polythene sheet, with all joints lapped and then sealed with double sided self adhesive tape.

---

# Design Considerations

---

## Roof Loading / Traffic

Kingspan Thermataper® TT46 Systems are suitable for use on access roof decks subject to limited foot traffic. Where inappropriate foot traffic is liable to occur, it is recommended that the roof surface is protected by promenade tiles. For further advice on the acceptability of specific foot traffic regimes, please contact the Kingspan Insulation Technical Service Department (see rear cover).

---

## Spanning on Metal Decks

Insulation boards should comply with the minimum thicknesses shown in the table below, when used over metal decks with trough openings.

Trough Opening (mm)	Minimum Insulant Thickness (mm)
≤ 75	25
76 - 100	30
101 - 125	35
126 - 150	40
151 - 175	45
176 - 200	50
201 - 225	55
226 - 250	60

## Green Roofs

Green roof systems generally comprise of several layers, including: drainage layers, filter membranes, growing media and vegetation (either in the form of mats / blankets, plug-plants or seeded). They are designed to retain water within the growing media or substrate layer for successful plant growth, but are also engineered to drain water freely in order to prevent ponding. If green roofs become completely saturated with water, the plant roots will eventually rot leading to the failure of the vegetation layer. For this reason good drainage on the roof is essential for green roof plants.

The use of tapered insulation with a well designed green roof system allows the roof to drain-freely and reduces the risk of complete water saturation during extreme rainfall events.

Green roof systems are a specialist design area. When designing a loose-laid insulated green roof assembly consideration needs to be given to the following.

Green roof systems are required to have a minimum dry weight of 80 kg/m<sup>2</sup> to ballast the insulation boards beneath them. However, the total required dry weight will depend upon wind uplift, which in turn will vary with the geographical location of the building, local topography, and the height and width of the roof concerned. The necessity for any additional dry weight should be assessed in accordance with BS EN 1991-1-4: 2005 + A1: 2010 (National Annex to Eurocode 1 Actions on structures. General Actions. Wind Actions).

When installing a loose-laid insulated green roof assembly, any insulation must be immediately over-laid with the green roof system, which must meet all of the requirements outlined above.

Where these requirements cannot be ensured, the insulation should be restrained by mechanical fixing (see Sitework). For further information please contact the Kingspan Insulation Technical Service Department (see rear cover).

---

## Lighting Protection

Building designers should give consideration to the requirements of BS EN 62305: 2011 (Protection against lightning).

# Sitework

## Pre-Delivery

- Ensure that your drawing is the latest revision and is relevant to the roof being insulated.
- Check that any rainwater outlets, roof lights, obstructions such as tank rooms and dimensions on the drawing correspond to the roof. Should there be any discrepancy contact the Kingspan Insulation Tapered Roofing Department.

## Delivery

- It is essential that quantities are checked against the delivery note upon receipt for the roof phase / area required.
- Ensure provisions are made to offload the delivery vehicle.

## Pre-Installation

- Ensure that vapour control layers (if required) are installed following the manufacturer's guidance.
- Surfaces should be level, clean, dry, and without large projections, steps or gaps before commencing installation.

## Laying pattern

- The working drawings supplied by the Kingspan Insulation Tapered Roofing Department will indicate the area of the roof to be covered, the minimum insulation level, fall direction and pitch of the tapered system.
- The location of each board type will be indicated clearly on the drawing and each pack will contain one board type only.
- Ridges, hips and valleys will be marked on the drawings, together with the setting out commencement points for laying of the boards.
- In situations where two or more layers of insulation are required, all layers should be installed in the same manner, as detailed in the following sections. However, refer to 'Mechanical Fixings' for guidance on the number of fixings to be used in each layer.
- In all cases, the layers should be horizontally offset relative to each other so that, as far as possible, the board joints in any two adjacent layers do not coincide with each other (see Figures 3 and 4).

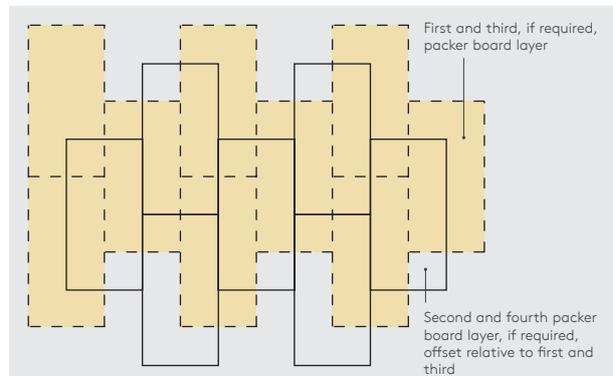


Figure 3: Offsetting of Multiple Packer Board Layers

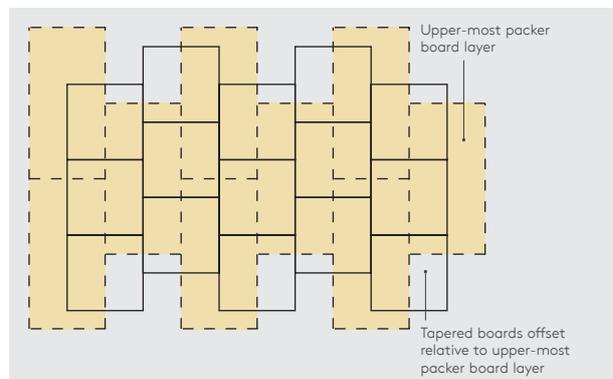


Figure 4: Offsetting of Tapered Boards Relative to Packer Boards

## Installing over Metal Decks

- Where an FM Approved construction is required, please refer to 'FM Approval' on page 12.
- Metal decks should be clean, dry, without large projections, steps or gaps, and should be graded to allow correct falls to all rainwater outlets.
- If using a sealed metal deck there is no requirement for a separate vapour control layer.
- If the metal deck is not sealed the vapour control layer should be loose-laid.
- Where one run of the specified vapour control layer laps another, there should be minimum 150 mm side and end overlaps, which should be adequately sealed.
- Turn up the vapour control layer at the edge of the roof to a height appropriate to the specified waterproofing membrane.
- Boards of Kingspan Thermataper® TT46 should be secured to the deck using mechanical fixings e.g. telescopic tube fasteners (see 'Mechanical Fixings').
- Insulation boards should always be laid break-bonded, either with their long edges at right angles to the trough openings, or diagonally across the corrugation line, and with joints lightly butted. There should be no gaps at abutments.

---

# Sitework

---

- Roof-light or ventilator kerbs etc. should always be insulated with the same thickness of Kingspan Thermataper® TT46 as the general roof area.
- A 25 mm thick Kingspan Thermaroof® TR26 upstand should be used around the perimeter of the roof on the internal façade of parapets.
- A minimum distance of 300 mm should be maintained between the top of the insulation upstand and the bottom of the horizontal roof insulation.
- For roofs without parapets, a timber edging batten of the same height of the insulation is to be used to fix the fascia board to the gutter system. Please contact the membrane manufacturer for more details.
- The waterproofing membrane is mechanically fixed in accordance with the membrane manufacturer's instructions, over the whole insulated area including any insulation upstands, as soon as possible after laying the insulation boards.

---

## Installing over Concrete Decks

- Where an FM Approved construction is required, please refer to 'FM Approval' on page 12.
- Concrete decks should be clean, dry, without large projections, steps or gaps, and should be graded to allow correct falls to all rainwater outlets.
- The vapour control layer should be loose-laid over the deck.
- Where one run of the specified vapour control layer laps another, there should be minimum 150 mm side and end overlaps, which should be adequately sealed.
- Turn up the vapour control layer at the edge of the roof to a height appropriate to the specified waterproofing membrane.
- Boards of Kingspan Thermataper® TT46 should be secured to the deck using mechanical fixings e.g. telescopic tube fasteners (see 'Mechanical Fixings').
- Insulation boards should always be laid break-bonded, either with their long edges at right angles to the edge of, or diagonally across the roof, and with joints lightly butted. There should be no gaps at abutments.
- Roof-light or ventilator kerbs etc. should always be insulated with the same thickness of Kingspan Thermataper® TT46 as the general roof area.
- A 25 mm thick Kingspan Thermaroof® TR26 upstand should be used around the perimeter of the roof on the internal façade of parapets.
- A minimum distance of 300 mm should be maintained between the top of the insulation upstand and the bottom of the horizontal roof insulation.
- For roofs without parapets, a timber edging batten of the same height of the insulation is to be used to fix the fascia board to the gutter system. Please contact the membrane manufacturer for more details.
- The waterproofing membrane is mechanically fixed in accordance with the membrane manufacturer's instructions, over the whole insulated area including any insulation upstands, as soon as possible after laying the insulation boards.

---

## Installing over Plywood Decks

- Timber decks should be clean, dry, without large projections, steps or gaps, and should be graded to allow correct falls to all rainwater outlets.
- The vapour control layer should be temporarily stapled or nailed to the deck.
- Where one run of the specified vapour control layer laps another, there should be minimum 150 mm side and end overlaps, which should be adequately sealed.
- Turn up the vapour control layer at the edge of the roof to a height appropriate to the specified waterproofing membrane.
- Boards of Kingspan Thermataper® TT46 should be secured to the deck using mechanical fixings e.g. telescopic tube fasteners (see 'Mechanical Fixings').
- Insulation boards should always be laid break-bonded, either with their long edges at right angles to the edge of, or diagonally across the roof, and with joints lightly butted. There should be no gaps at abutments.
- Joints between insulation boards should not coincide with those between the plywood sheets.
- Roof-light or ventilator kerbs etc. should always be insulated with the same thickness of Kingspan Thermataper® TT46 as the general roof area.
- A 25 mm thick Kingspan Thermaroof® TR26 upstand should be used around the perimeter of the roof on the internal façade of parapets.
- A minimum distance of 300 mm should be maintained between the top of the insulation upstand and the bottom of the horizontal roof insulation.
- For roofs without parapets, a timber edging batten of the same height of the insulation is to be used to fix the fascia board to the gutter system. Please contact the membrane manufacturer for more details.
- The waterproofing membrane is mechanically fixed in accordance with the membrane manufacturer's instructions, over the whole insulated area including any insulation upstands, as soon as possible after laying the insulation boards.

## Installing over Existing Flat Roofs

- The existing waterproofing membrane surface should be clean, dry, without large projections, steps or gaps, and should be graded to allow correct falls to all rainwater outlets.
- Where the existing waterproofing membrane is not fit for purpose as a vapour control layer, a separate vapour control layer should be loose-laid over it.
- Where one run of the specified vapour control layer laps another, there should be minimum 150 mm side and end overlaps, which should be adequately sealed.
- Turn up the vapour control layer at the edge of the roof to a height appropriate to the specified new waterproofing membrane.
- Boards of Kingspan Thermataper® TT46 should be secured to the deck using mechanical fixings e.g. telescopic tube fasteners (see 'Mechanical Fixings').
- Insulation boards should always be laid break-bonded, either with their long edges at right angles to the edge of, or diagonally across the roof, and with joints lightly butted. There should be no gaps at abutments.
- Roof-light or ventilator kerbs etc. should always insulated with the same thickness of Kingspan Thermataper® TT46 as the general roof area.
- A 25 mm thick Kingspan Therमारoof® TR26 upstand should be used around the perimeter of the roof on the internal façade of parapets.
- A minimum distance of 300 mm should be maintained between the top of the insulation upstand and the bottom of the horizontal roof insulation.
- For roofs without parapets, a timber edging batten of the same height of the insulation is to be used to fix the fascia board to the gutter system. Please contact the membrane manufacturer for more details.
- The waterproofing membrane is installed in accordance with the membrane manufacturer's instructions, over the whole insulated area including any insulation upstands, as soon as possible after laying the insulation boards.

## Installing over Existing Composite Panel Roofs

- If the existing profile provides inadequate support for the insulation boards, the existing roof should be over-boarded, e.g. with plywood, prior to their installation.
- Boards of Kingspan Thermataper® TT46 should be secured to the deck using mechanical fixings. Please refer to the Kingspan Insulation Technical Advice Service (see rear cover) for advice on fixing specification.
- Insulation boards should always be laid break-bonded and with joints lightly butted. There should be no gaps at abutments. If the existing roof has been over-boarded, then insulation boards should be laid with their long edges at right angles to the edge of, or diagonally across the roof. If not, they should be laid either with their long edges at right angles to the trough openings, or diagonally across the corrugation line.
- Roof-light or ventilator kerbs etc. should always insulated with the same thickness of Kingspan Thermataper® TT46 as the general roof area.
- The waterproofing membrane is installed in accordance with the membrane manufacturer's instructions, over the whole insulated area including any insulation upstands, as soon as possible after laying the insulation boards.

---

# Sitework

---

## Mechanical Fixings

- The number of mechanical fixings required to fix Kingspan Thermataper® TT46 will vary with the geographical location of the building, the local topography, and the height and width of the roof concerned along with the deck type.
- A minimum of 6 fixings are required to secure boards of Kingspan Thermataper® TT46 to the deck.
- The requirement for additional fixings should be assessed in accordance with BS EN 1991-1-4: 2005 + A1: 2010 (National Annex to Eurocode 1. Actions on structures. General Actions. Wind Actions).
- Mechanical fixings must be arranged in an even pattern.
- Fasteners at insulation board edges must be located > 50 mm and < 150 mm from edges and corners of the board and not overlap board joints.
- Please refer to page 10 for recommended fixing patterns.
- Each fixing should incorporate a square or circular plate washer (50 x 50 mm or 50 mm diameter).
- If two layers of insulation are to be installed, the base layer should be mechanically fixed with minimum 1 No. fixing in the centre of the board before fixing the top layer as described above.
- Where alternative mechanical fixing systems are specified, such as bar fixing systems, the specified system must give similar restraint to the insulation board as would be attained by the use of conventional telescopic tube fasteners.
- For details on fixings refer to:

<b>Ejot UK Limited</b> <a href="http://www.ejot.co.uk">www.ejot.co.uk</a>	+44 (0) 1977 687 040
<b>Fixfast</b> <a href="http://www.fixfast.com">www.fixfast.com</a>	+44 (0) 1732 882 387
<b>SFS Intec</b> <a href="http://www.sfsintec.biz/uk">www.sfsintec.biz/uk</a>	+44 (0) 1132 085 500

## General

### Following Trades

- The roof must be adequately protected when building works are being carried out on or over the roof surface. This is best achieved by close boarding. The completed roof must not be used for the direct storage of heavy building components such as bricks or air conditioning equipment.

### Daily Working Practice

- At the completion of each day's work, or whenever work is interrupted for extended periods of time, a night joint must be made in order to prevent water penetration into the roof construction.

### Cutting

- Cutting should be carried out either by using a fine toothed saw or by scoring with a sharp knife, snapping the board over a straight edge and then cutting the facing on the other side.
- Ensure accurate trimming to achieve close-butting joints and continuity of insulation.

### Packaging and Storage

- The polyethylene packaging of Kingspan Insulation products, which is recyclable, should not be considered adequate for outdoor protection.
- Ideally, boards should be stored inside a building. If, however, outside storage cannot be avoided, then the boards should be stacked clear of the ground and covered with an opaque polythene sheet or weatherproof tarpaulin. Boards that have been allowed to get wet should not be used.

### Health and Safety

- Kingspan Insulation products are chemically inert and safe to use.
- A Safety Information Data Sheet for this product is available from the Kingspan Insulation website [www.kingspaninsulation.co.uk/safety](http://www.kingspaninsulation.co.uk/safety).


Warning - do not stand on or otherwise support your weight on this product unless it is fully supported by a load bearing surface.

# Mechanical Fixing Patterns


## Recommended Fixing Patterns

The recommended fixing patterns for Kingspan Thermataper® TT46 are shown below. The number of fixings necessary should be assessed in accordance with BS 6399-2: 1997 (Loadings for buildings. Code of practice for wind loads) or BS EN 1991-1.4: 2005 (National Annex to Eurocode 1. Actions on structures, General Actions, Wind Actions).


The images below show recommended fixing patterns, the number of fixings used and the resulting fixing density (number of fixings per m<sup>2</sup>).




4 No. per board  
(1.2 x 1.2 m board  
- 2.77 fixings / m<sup>2</sup>)




5 No. per board  
(1.2 x 1.2 m board  
- 3.47 fixings / m<sup>2</sup>)




6 No. per board  
(1.2 x 1.2 m board  
- 4.16 fixings / m<sup>2</sup>)




7 No. per board  
(1.2 x 1.2 m board  
- 4.86 fixings / m<sup>2</sup>)




8 No. per board  
(1.2 x 1.2 m board  
- 5.55 fixings / m<sup>2</sup>)




9 No. per board  
(1.2 x 1.2 m board  
- 6.25 fixings / m<sup>2</sup>)




10 No. per board  
(1.2 x 1.2 m board  
- 6.94 fixings / m<sup>2</sup>)




11 No. per board  
(1.2 x 1.2 m board  
- 7.63 fixings / m<sup>2</sup>)




12 No. per board  
(1.2 x 1.2 m board  
- 8.33 fixings / m<sup>2</sup>)



13 No. per board  
(1.2 x 1.2 m board  
- 9.02 fixings / m<sup>2</sup>)



14 No. per board  
(1.2 x 1.2 m board  
- 9.72 fixings / m<sup>2</sup>)



15 No. per board  
(1.2 x 1.2 m board  
- 10.41 fixings / m<sup>2</sup>)

NB Mechanical fixings e.g. telescopic tube fasteners, must be arranged in an even pattern. Fasteners at board edges must be located > 50 mm and < 150 mm from edges and corners of the board and not overlap board joints.

# Product Details

## Product Description

Kingspan Thermataper® TT46 is the tapered version of Kingspan Thermataper® TR26.

## The Facings

Kingspan Thermataper® TT46 is faced on both sides with a low emissivity composite foil, autohesively bonded to the insulation core during manufacture.

## The Core

The core of Kingspan Thermataper® TT46 is manufactured with Nilflam® technology, a high performance fibre-free rigid thermoset polyisocyanurate (PIR) insulant manufactured with a blowing agent that has zero Ozone Depletion Potential (ODP) and low Global Warming Potential (GWP).



## Standards & Approvals

Kingspan Thermataper® TT46 Systems are manufactured to the highest standards under a management system certified to ISO 9001: 2015 (Quality Management Systems. Requirements), ISO 14001: 2015 (Environmental Management Systems. Requirements), BS OHSAS 18001: 2007 (Occupational Health and Safety Management Systems. Requirements) and ISO 50001: 2011 (Energy Management System. Requirements with Guidance for Use).

The use of Kingspan Thermataper® TT46 (in thicknesses of 25 - 160 mm) produced at Kingspan Insulation's Pembridge, Herefordshire and Selby, North Yorkshire manufacturing facilities is covered by BBA Certificate 16/5332.



## Standard Dimensions

Kingspan Thermataper® TT46 is available in the following standard size:

Nominal Dimension		Availability
Length	(m)	1.2
Width	(m)	1.2
Insulant Thickness	(mm)	
Systems with a 1:30 & 1:40 fall		60 minimum
Systems with a 1:60 & 1:80 fall		30 minimum
All systems		Unlimited maximum*

\* Packer boards will be required above a specific thickness.

## Taper Gradients

Kingspan Thermataper® TT46 is available ex stock in falls of 1:30, 1:40, 1:60 and 1:80. For information regarding tapered roof designs incorporating Kingspan Thermataper® TT46 in a wider range of falls please contact the Kingspan Insulation Tapered Roofing Department (see rear cover).

## Compressive Strength

The compressive strength of Kingspan Thermataper® TT46 typically exceeds 150 kPa at 10% compression, when tested to BS EN 826: 2013 (Thermal insulating products for building applications. Determination of compression behaviour).

# Product Details

## Water Vapour Resistivity

The product typically achieves a resistivity greater than 100 MNs/gm, when tested in accordance with BS EN 12086: 2013 (Thermal insulating products for building applications. Determination of water vapour transmission properties). Kingspan Thermataper® TT46 Systems should always be installed over a vapour control layer or sealed metal deck (see 'Water Vapour Control' on page 4).

## Durability

If correctly installed, Kingspan Thermataper® TT46 Systems can have an indefinite life. Their durability depends on the supporting structure and the conditions of its use.

## Resistance to Solvents, Fungi & Rodents

The insulation core is resistant to short-term contact with petrol and with most dilute acids, alkalis and mineral oils. However, it is recommended that any spills be cleaned off fully before the boards are installed. Ensure that safe methods of cleaning are used, as recommended by suppliers of the spilt liquid. The insulation core is not resistant to some solvent based adhesive systems, particularly those containing methyl ethyl ketone. Adhesives containing such solvents should not be used in association with this product. Damaged boards or boards that have been in contact with harsh solvents or acids should not be used.

The insulation core and facings used in the manufacture of Kingspan Thermataper® TT46 Systems resist attack by mould and microbial growth and do not provide any food value to vermin.

## Acoustics

For details of the acoustic properties of Kingspan Thermataper® TT46, please visit [www.kingspaninsulation.co.uk/acoustics](http://www.kingspaninsulation.co.uk/acoustics).

## Fire Performance

For guidance regarding the fire safety requirements of the Building Regulations / Standards, refer to the relevant Technical Bulletins and links to Government websites at [www.kingspaninsulation.co.uk/fireregulations](http://www.kingspaninsulation.co.uk/fireregulations).

Kingspan Thermataper® TT46 achieves European Classification (Euroclass) E when classified to EN 13501-1: 2018 (Fire classification of construction products and building elements. Classification using data from reaction to fire tests).

External roof exposure for tapered insulation boards is determined through testing of the equivalent flat insulation board, at both the minimum and maximum thicknesses available for the tapered scheme.

Kingspan Therमारooft® TR26 (the flat equivalent of Kingspan Thermataper® TT46), when incorporated in a roofing system, subjected to the external roof exposure testing, specified in the table below, can achieve the results shown.

However performance is reliant on the roof covering, therefore for further details please contact your roofing system supplier or waterproof membrane manufacturer.

Test	Classification
BS 476-3: 2004	AA
DD CEN/TS 1187: 2012	B <sub>ROOF(t4)</sub>

Further details on the fire performance of Kingspan Insulation products and systems incorporating the products, may be obtained from the Kingspan Insulation Technical Service Department (see rear cover).

## FM Certification

Kingspan Thermataper® TT46 is available with FM Approval to FM 4470 (Approval Standard for Single-Ply, Polymer-Modified Bitumen Sheet, Built-Up Roof (BUR) and Liquid Applied Roof Assemblies for use in Class 1 and Non-combustible Roof Deck Construction) December 2016, subject to conditions of approval. Individual layers of 40 - 160 mm or multi-layers of up to 280 mm (with any combination respecting the minimum and maximum single layers) are covered by the FM Approval. Please contact Kingspan Insulation's Technical Service Department (see rear cover for details).



Not all thicknesses and roof deck constructions are covered by the FM Approval. Further details of the current FM Approved thicknesses and roof deck constructions can be located on [www.fmapprovals.com/roofnav](http://www.fmapprovals.com/roofnav) or [www.roofnav.com](http://www.roofnav.com) by searching 'Kingspan Therna' Alternatively please contact Kingspan Insulation's Technical Service Department (see rear cover for details).

## Thermal Properties

The effective thermal conductivity and thermal resistance of the insulation in a tapered roofing system is specific to the individual roof design. The Kingspan Insulation Tapered Roofing Department (see rear cover for details) performs calculations to determine these values in accordance with Annex E of BS EN ISO 6946: 2017 (Building components and building elements. Thermal resistance and thermal transmittance. Calculation methods) as part of the scheme design process.

---

# Kingspan Insulation

---

## Company Details

Kingspan Insulation Ltd is part of the Kingspan Group plc., one of Europe's leading construction product manufacturers. The Kingspan Group was formed in the late 1960s and is a publicly quoted group of companies headquartered in Kingscourt, County Cavan, Ireland.

Kingspan Insulation Ltd is a market leading manufacturer of premium and high performance rigid insulation products and insulated systems for building fabric and building services applications.

---

## Products & Applications

Kingspan Insulation Ltd has a vast product range. Kingspan Insulation Ltd products are suitable for both new build and refurbishment in a variety of applications within both domestic and non-domestic buildings. The available insulation solutions are listed below.

- Pitched Roofs
- Flat Roofs
- Green Roofs
- Cavity Walls
- Solid Walls
- Timber and Steel Framing
- Insulated Cladding Systems
- Insulated Render Systems
- Floors
- Soffits
- Ductwork

### Further Solutions:

- Insulated Dry-Lining
- Tapered Roofing Systems
- Cavity Closers
- The Kingspan KoolDuct® System
- Kingspan nilvent®
- Kingspan TEK® Building System

## Insulation Product Benefits

### Kingspan OPTIM-R® Vacuum Insulation Panel (VIP) Products

- With a declared value thermal conductivity of 0.007 W/mK, these products provide an insulating performance that is up to five times better than commonly used insulation materials.
- Provides high levels of thermal efficiency with minimal thickness.
- Over 90% (by weight) recyclable.

### Kingspan Kooltherm® and Kooltherm® 100 Products

- With a thermal conductivity of 0.018-0.023 W/mK these are the most thermally efficient insulation products commonly used.
- The thinnest commonly used insulation products for any specific U-value.
- Manufactured with a blowing agent that has zero Ozone Depletion Potential (ODP) and low Global Warming Potential (GWP).

### Kingspan QuadCore®

- With a thermal conductivity of 0.021 W/mK this is amongst one of the more thermally efficient insulation products commonly used.
- Offering excellent thermal and fire performance, enhanced environmental credentials and backed by an extended warranty.
- Manufactured with a blowing agent that has zero Ozone Depletion Potential (ODP) and low Global Warming Potential (GWP).

### Kingspan Therma™ Products

- With a thermal conductivity of 0.022-0.028 W/mK these are amongst the more thermally efficient insulation products commonly used.
- Manufactured with a blowing agent that has zero Ozone Depletion Potential (ODP) and low Global Warming Potential (GWP).

### Kingspan GreenGuard® Products

- Rigid extruded polystyrene insulation (XPS) has the necessary compressive strength to make it the product of choice for specialist applications such as heavy duty flooring, car park decks and inverted roofing.
- Manufactured with a blowing agent that has zero Ozone Depletion Potential (ODP) and low Global Warming Potential (GWP).

### All Products

- Unaffected by air infiltration - a problem that can be experienced with mineral fibre and which can reduce thermal performance.
- Safe and easy to install.
- If installed correctly, can provide reliable long term thermal performance over the lifetime of the building.
- Each product achieves the required fire performance for its intended application.

---

# Contact Details

---

## Kingspan Insulation Ltd

Pembridge | Leominster  
Herefordshire | HR6 9LA

T: +44 (0) 1544 388 601

E: [info@kingspaninsulation.co.uk](mailto:info@kingspaninsulation.co.uk)

[www.kingspaninsulation.co.uk](http://www.kingspaninsulation.co.uk)

For individual department contact details please visit

[www.kingspaninsulation.co.uk/contact](http://www.kingspaninsulation.co.uk/contact)

Kingspan Insulation Ltd reserves the right to amend product specifications without prior notice. Product thicknesses shown in this document should not be taken as being available ex-stock and reference should be made to the current Kingspan Insulation price-list or advice sought from Kingspan Insulation's Customer Service Department. The information, technical details and fixing instructions etc. included in this literature are given in good faith and apply to uses described. Recommendations for use should be verified for suitability and compliance with actual requirements, specifications and any applicable laws and regulations. For other applications or conditions of use, Kingspan Insulation offers a Technical Advisory Service, the advice of which should be sought for uses of Kingspan Insulation products that are not specifically described herein. Please check that your copy of this literature is current by contacting the Kingspan Insulation Marketing Department.

© Kingspan, Kingspan GreenGuard, KoolDuct, Kooltherm, nilvent, TEK and the Lion Device are Registered Trademarks of the Kingspan Group plc in the UK, Ireland and other countries. All rights reserved.

TM Therma is a Trademark of the Kingspan Group plc.

Kingspan Insulation Ltd is not associated with, and its products have not necessarily been tested by, the GREENGUARD Environmental Institute.

Registered in England & Wales, No. 01882722. Registered Office: Pembridge, Leominster, Herefordshire HR6 9LA UK. VAT GB428602456.

