



Units 1-3 Shannon Industrial Estate
Lodge Road
Sandbach
Cheshire
CW11 3HP

e. info@euroacc.co.uk
w. www.@euroacc.co.uk


Data Sheet

Circular Wire Spacers

Intersig's Circular Wire Spacers provide a quick and easy method of supporting reinforcement in concrete slabs. They are supplied in 3 metre lengths and are formed into a 1 metre circle on site using tying wire.

Product Code	Height (mm)	Bar Size (mm)			Length (mtr)	Weight (kg/mtr)	Pack size (no)	Pallet Size (no)
CWL050*	50	3.3	3.3	3.3	3	0.211	100/300	1200
CWL060*	60	3.3	3.3	3.3	3	0.214	100/300	1200
CWL075*	75	3.3	3.3	3.3	3	0.219	100/300	1200
CWL090*	90	3.3	3.3	3.3	3	0.228	100/300	1200
CWL105*	105	3.3	3.3	3.3	3	0.235	100/300	1200
CWL120*	120	3.3	3.3	3.3	3	0.243	100/300	1200
CWL135*	135	3.3	3.3	3.3	3	0.252	100/300	600
CWL150*	150	3.3	3.3	3.3	3	0.260	100/300	600
CWL165*	165	3.3	3.3	3.3	3	0.269	100/300	600
CWL180*	180	3.3	3.3	3.3	3	0.278	100/300	600
CWL200*	200	3.3	3.3	3.3	3	0.291	100/300	600

* UK Stock Sizes

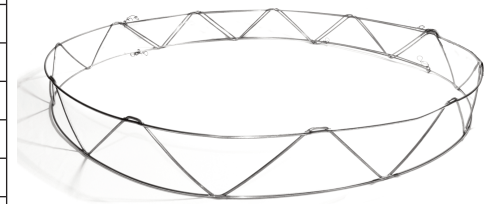

Rebar type

- Upper Wire: B500 Smooth
- Diagonal Wire: B500 Smooth
- Bottom Wire: B500 Smooth

