

Insulated Panel 32/1000 Profile




Insulated Panels are suitable for both roofing and cladding projects. Designed with a composite core and wide-spaced trapezoidal steel construction, the Insulated Panels offer optimal water drainage and strength performance.

Manufactured with a high-quality, pre-finished metallic coating and available in the popular Goosewing Grey colour, Panels are available in various lengths, from 2.5 metres up to 5 metres, to suit your project.

Insulated Panels boast a highly consistent insulation performance, with outstanding colour retention and corrosion resistance for longevity.

Each Panel can be installed down to a 4-degree pitch and provides a 1000mm standard width when lapped. Insulated Panels can be carefully cut at ground level using a jigsaw for small cut-outs and a circular saw with a fine-tooth blade for long straight cuts.

SPECIFICATIONS	
Applications	Wall or Roof (Vertical or Horizontal)
External Finish	Goosewing Grey PVC coated steel
External Face	32mm profile height, 333mm pitch centres
Standard Width	1000mm when lapped
Available Length	2.5m, 3m, 3.5m, 4m, 5m
Minimum Pitch	4 degrees
Thickness	40mm
Cutback	25mm
Thermal Performance	0.46 W/m ² k (Test Standard EN 10211)
Fire Classification	B - s2 (Test Standard EN 13501-1)
Weight per Panel (kg)	24.75, 29.70, 34.65, 39.6, 49.5

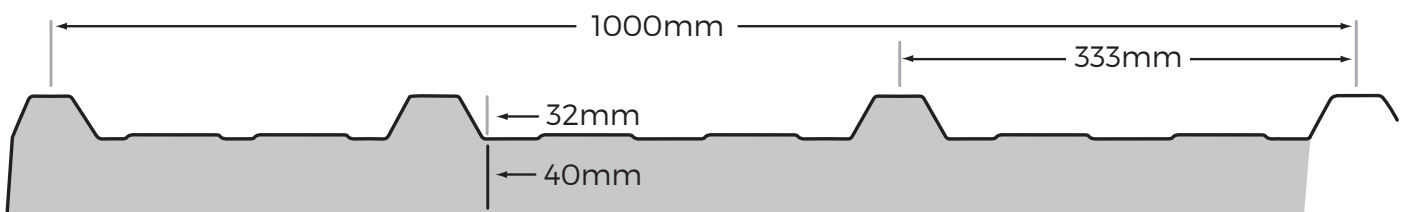

PLEASE NOTE - Extra care should be taken when handling the Insulated Panels and, where possible, manual handling should be avoided.



01837 659901 info@cladco.co.uk
www.cladco.co.uk

Beardown Road, Exeter Road Industrial Estate, Okehampton EX20 1UA