



Bonding Strip

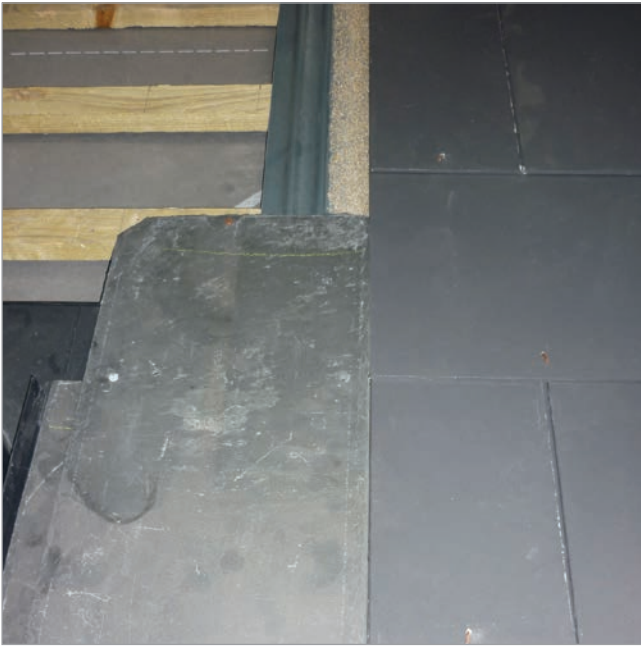

The Bonding Strip is an excellent way of providing a watertight junction above the party wall between different roof finishes when re-roofing.

Product features & benefits

- Provides a watertight junction between differing roof finishes
- Lightweight and flexible
- UV resistant
- Safe and easy to cut
- BBA certified

Area of application

The Bonding Strip provides a watertight junction between two different roof finishes above the party wall.

Material

UV stabilised Glass Reinforced Polyester

Colour

Grey

Dimensions

3m long x 216mm x 1mm

Product Code

KR965710

Packaging / Weight (per pack)

Banded in packs of 10 pcs / 16kg per 10 pcs

Regulations


- BBA certified
- Fire tested to comply with BS476: Part 3 SAB and Part 7 Class 3

Installation

Expose party wall by removing tiles/slates on both sides and cut the battens back on the roof structure that is not being replaced, so that they are located above the party wall.

Fix battens on both sides over the party wall, allowing a 75mm gap between battens to allow for fire stop material. Fix the Bonding Gutter at 1m centres using clout headed nails to tiling battens through 5mm drilled holes, making sure the sanded strip is situated centrally over the party wall. Laps as per GRP Valleys.

Apply a 3:1 mortar bed to sanding strip, lay, bed and fix tiles on both sides making sure that both tile edges are located centrally over the Bonding Gutter and are butted together. Depending on the different tile profiles, the joint between may require pointing using a 3:1 sand cement mix.

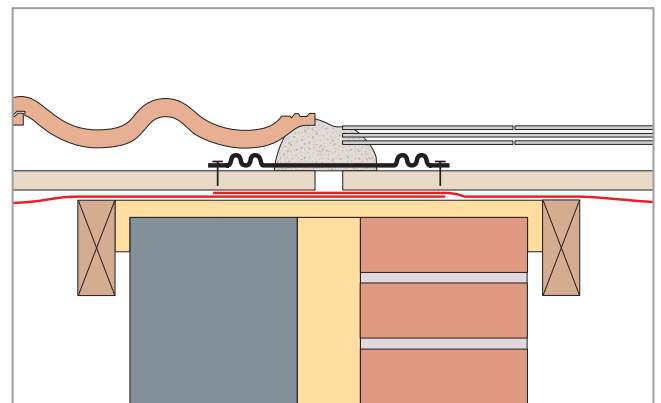

TS-05#24-UK-0617. We assume no liability for typing errors.

Klober Ltd

Unit 6F · East Midlands Distribution Centre · Short Lane · Castle Donington · Derbyshire · DE74 2HA
Tel. +44 (0)1332 813 050 · Fax +44 (0)1332 814 033 · www.klober.co.uk · info@klober.co.uk

KLOBER