

PRODUCT DATASHEET

Rubber Shock Absorbent Pads


RynoPaveSupport Shock Absorbent Gaskets are a simple but highly effective way to further enhance paving applications supported with Ryno paving pedestals.

HEAD SHOCK-ABSORBENT GASKETS

Placed/fixed directly to the pedestal head to enhance shock absorption and sound reduction. Particularly effective for lighter or harder paving materials, such as porcelain.

BASE RUBBER SHOCK PAD

Installed under pedestal base, to enhance acoustic properties or to provide additional protection to membrane.

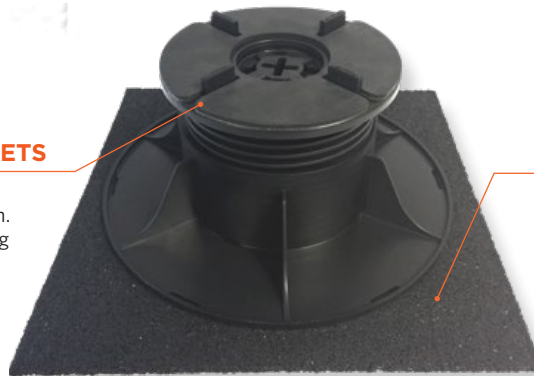

THE RANGE



BRSP
3mm rubber shock pad for pedestal base
part no: 50.1001



HRSP for Levelling
1mm self-adhesive rubber levelling shockpad for [RPA/RPF](#) Pedestals
part no: 50.1004



HRSP for RPF
2mm moulded rubber shockpad for [RPF](#) Pedestal
part no: 50.1008




HRSP for RPA
2mm moulded rubber shockpad for [RPA](#) Pedestal
part no: 50.1009



HRSP for [RP-FR](#)
(for use with plastic spacer)
1mm self-adhesive gasket for [RP-FR](#) Pedestal (with Plastic Spacer)
part no: 50.1010



HRSP for [RP-FR](#)
(for use with metal spacer)
1mm self-adhesive gasket for [RP-FR](#) Pedestal (with Metal Spacer)
part no: 50.1011



HRSP for [RPS-FR](#)
1mm self-adhesive levelling gasket for [RPS-FR](#) Support
part no: 50.7100

TECHNICAL SPECIFICATION

| | Head Rubber Shock Pads | Base Rubber Shock Pad |
|-----------------------|--|--|
| Material | EPDM (ethylene propylene diene monomer) rubber | High grade SBR (styrene-butadiene) rubber granulate bonded with polyurethane |
| Temperature stability | Max -30°C | Max -40°C |
| Diameter/ dimensions | HRSP for Levelling | 230 x 230mm |
| | HRSP for RPF | |
| | HRSP for RPA | |
| | HRSP for RP-FR (for use with plastic spacer) | |
| | HRP for RP-FR (for use with metal spacer) | |
| | HRSP for RPS-FR | 170x 170mm |



Castlepoint
Castle Way
Ellon AB41 9RG

01358 726000
sales@rynogroup.co.uk
rynogroup.co.uk