

# Procheck 125

FOR VAPOUR CONTROL

## WHY CHOOSE PROCHECK 125?

Procheck 125 is a lightweight reinforced polyethylene vapour barrier which can be utilised in a variety of commercial applications. Procheck 125 can be utilised where very high moisture vapour resistance is not a necessity but a strong, durable airtight membrane is.


### Key Features

- Thickness 0.35mm
- 350 micron
- Tensile MD = 190 N/50mm  
CD = 130 N/50mm
- Nail tear 150N / 190N

### Advantages

- Vapour Resistance-126 MNs/g
- Reinforced
- Translucent
- Low / Medium Risk Applications eg. infrastructure, light commercial buildings

Physical Properties	Result
Roll size	2m x 50m
Nominal Weight	90 g/m <sup>2</sup>
Nominal Thickness	0.35mm
Tensile Strength along the roll across the roll	190 N / 50mm 130 N/ 50mm
Nail Tear Resistance along the roll across the roll	150 N 190 N
Water Vapour Resistance	126 MNs/g

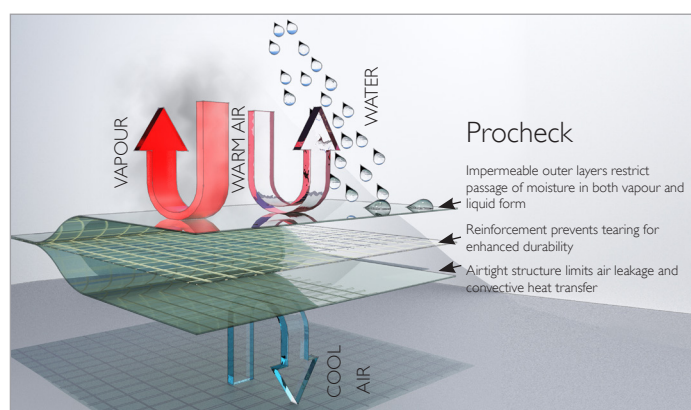

Download a brochure from  
our website...

[www.proctorgroup.com](http://www.proctorgroup.com)



contact@proctorgroup.com | +44 (0) 1250 872261