

PRODUCT DATASHEET

RPF Fixed Head Adjustable Paving Pedestal

The RPF fixed head adjustable pedestal is designed to support all conventional paving and decking systems.

SUPPORT HEAD

- Supports paving slabs
- Connection design allows for easy adjustment of pedestal height once paving has been laid

SPACER TABS

- Provide consistent spacing between slabs
- Pre-installed snap-off design allows for easy removal as required.

ADJUSTABLE THREADED SECTION


- Allows millimetre perfect adjustment within given range
- High loading capability

HEIGHT EXTENSION COLLAR

- Adds 126mm of height
- Enables incremental height build-up as required.

SUPPORT BASE

- Evenly spreads load
- Protects membranes

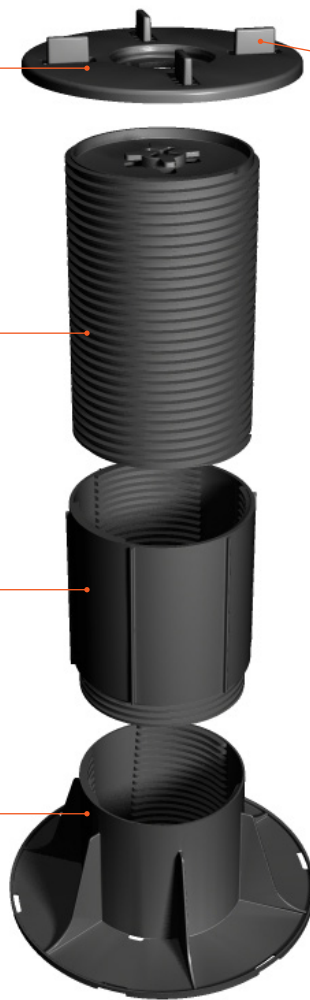

TECHNICAL SPECIFICATION

Material	PP Polypropylene (recyclable), UV resistant
Biological/chemical	Resistant to moulds, algae, alkali, bitumen
Height range	22-35mm, 35-55mm, 55-95mm, 95-165mm, 165-235mm, 200-270mm, 260-340mm, 305-375mm, 365mm-445mm, 410-480mm, 470-550mm
Compression	1000kg
Base diameter	200mm
Head diameter	120mm
Spacer tab thicknesses	2mm / 4mm (standard) / 6mm / 8mm / 10mm
Working Temperature	-40°C to 120°C



Castlepoint
Castle Way
Ellon AB41 9RG

01358 726000
sales@rynogroup.co.uk
rynogroup.co.uk