



Mounting options

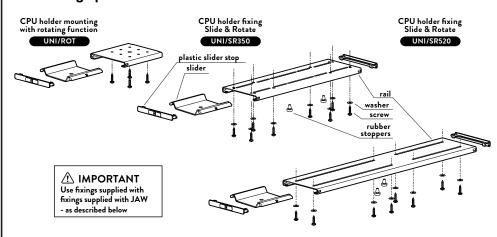



Fix your CPU

2 Unwind JAW to open up then tighten on CPU using allen key supplied.




NOTE

force when tightening may result in the damage of your CPU


Recommended tightening torque 1.5Nm to 2.5Nm

Mount to furniture Preparation

Make sure the CPU has enough space to rotate if required.





Mounting the bracket to the underside of the desk

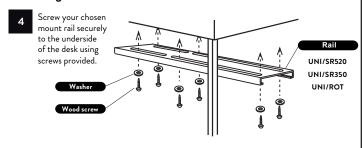

Insert the JAW

Slide the JAW into the rails then insert the plastic slider stop.





WARNING

- Ensure desk is suitable to take the weight of the CPU holder and CPU.
- Do not use this product for any purpose other than that for which it was designed.
 Hold the CPU tightly when making adjustments.
- Care should be taken to avoid trapping fingers.
 Do not dismantle or modify the CPU cradle.
- Supported weight must not exceed 25kg (55lb) per cradle.

$C \in$

- **⚠** DISCLAIMERS · The use of power tools, lever bars or excessive force during the installation, or
- reconfiguration of the product will invalidate your guarantee.

 Failure to observe the recommendations in the use, and configuration of these
- products may affect your guarantee.

 As part of Colebrook Bosson Saunders ongoing product improvement programme, the
- design of products may change without prior notice and details may vary from those illustrated.
- A PATENTS · Colebrook Bosson Saunders hold a number of patents and other intellectual
- property rights covering our products and processes.

 You can find patent information on our website at:

⚠ MAINTENANCE AND INSPECTION Ensure all screws are tightened and occasionally adjust if needed.
 Clean with a damp cloth, NO solvents.

www.colebrookbossonsaunders.com/patents

