
Brindille Sconce 212034





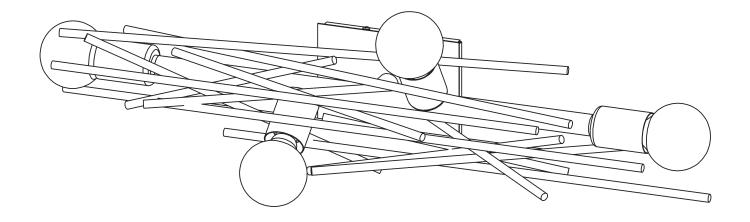

Component Parts

- A Fixture
- **B** Mounting Bracket
- C Safety Cable
- D #8 Screws (4)
- E Socket (4)
- F G25 Bulb (4)

B53

Brindille Sconce 212034

CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAYRESULT IN SERIOUS PERSONAL INJURY OR DEATHAND PROPERTY DAMAGE. We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

Please Note: After installation extra hardware and accessories are possible; our kits are used on multiple products.

To Install Fixture (Figure 1) - on following page

CAUTION: BE SURE POWER IS OFF AT THE MAIN BREAKER BOX PRIOR TO INSTALLATION.

- 1. Carefully unpack the fixture (A) from the carton.
- 2. Take off rubber band and remove mounting bracket (B) from fixture (A).
- 3. Thread the wires in the electrical box through the hole in the mounting bracket (B) while moving the bracket into position. Place mounting bracket over electrical box and secure with a machine screw (not provided). (Refer to figure 1 for orientation)

NOTE: A NEW ELECTRIC BOX COMES WITH SCREWS. WHEN REPLACING A FIXTURE, RETAIN THE EXISTING SCREWS FOR USE.

- 4. Hold fixture (A) close to wall. Secure safety cable (C) and mounting bracket (B) with a machine screw (not provided) to electrical box
- 5. Using suitable wire connectors (not provided), connect fixture wires to supply wires (white to white and black to black). Connect all ground wires (bare copper or green to bare copper or green).


CAUTION: MAKE SURE WIRE CONNECTORS ARE TWISTED ON SECURELY, AND NO BARE WIRE IS EXPOSED.

6. Place fixture (A) over mounting bracket (B). Secure with #8 screws (D). Be sure no wires are pinched between fixture and wall.

NOTE: IT IS EASIER TO START ALL 4 SCREWS AND THEN TIGHTEN TO SECURE FIXTURE.

- 7. Install G25 bulbs (F) into sockets (E).
- 8. Restore electricity at main breaker.



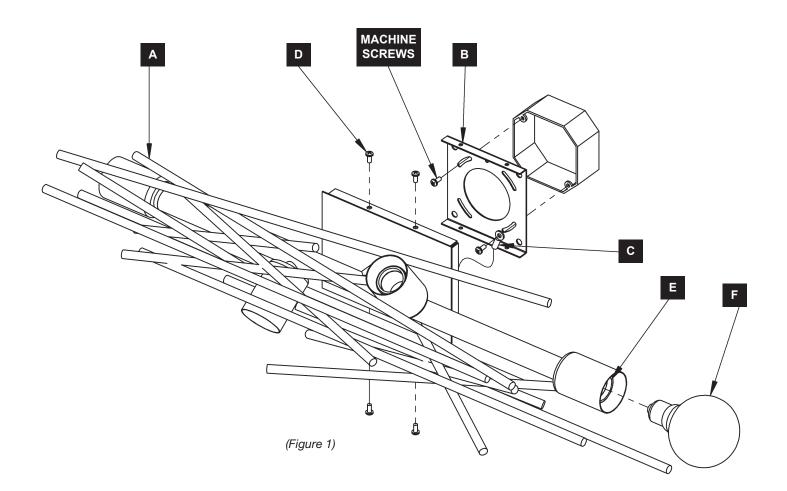

If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product. We hope you enjoy your fixture!

* Hubbardton Forge will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.

