
Recessed downlight

Providing a contemporary and functional style to any space. Framed by a powder-coated finish, these high-output fixtures provide a crisp, low-glare emission.




DRY



LOW-GLARE



Intertek

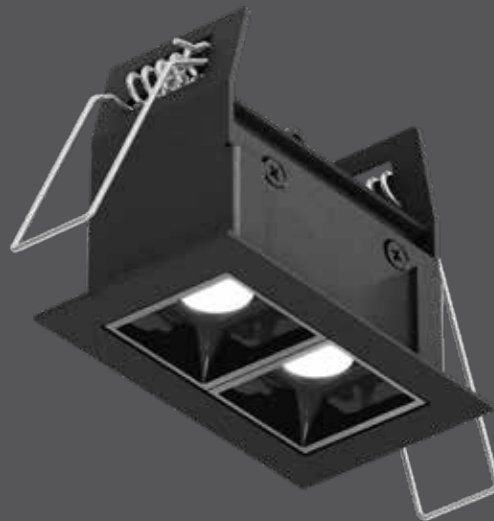

Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
MSL1-3K	2"	4 W	170 lm	200 lm	90	3000 K	120 V
MSL2-3K	3"	6 W	320 lm	400 lm	90	3000 K	120 V

Specifications

Over 50,000 hours of service life
 Every fixture includes a junction box with integrated driver
 Non-dimmable
 Can be daisy chained
 Superior LED performance and lifespan
 Regressed light source
 Minimal heat emission
 Aluminum construction
 Suitable for dry locations
 5-year warranty

Accessories

RFP-MSL1
 Rough-in plate for MSL1
RFP-MSL2
 Rough-in plate for MSL2

Finish

○ **AWH** White
 ● **BK** Black


Order example

MSL2-3K-BK
 Non-dimmable MSL2-3K 3" recessed downlight fixture in a black finish

Note

Other Color °T and Finishes available, but may require MOQ's and longer lead times. Please contact your DALI representative for more information.

MSL1-3K 1-9/16" x 1-9/16" 

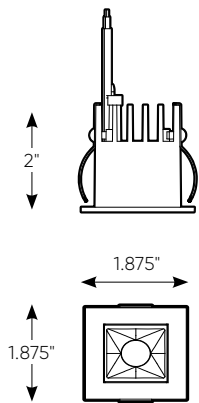

MSL2-3K 1-9/16" x 2-5/8" 