PD22332

Specification Sheet

Pendant





DATE

TYPE

Color Temp 3000K

>90

100%-10%

50,000 hours


CRI(Ra)

Dimming

Rated Life

Voltage	Watt	LED Lumens	Delivered Lumens	Finish(es)
120V	70W*	3500lm*	3150lm*	BK - Black
120V	70W*	3500lm*	3150lm*	BN - Brushed Nickel
120V	70W*	3500lm*	3150lm*	WH - White

^{*}Preliminary figures

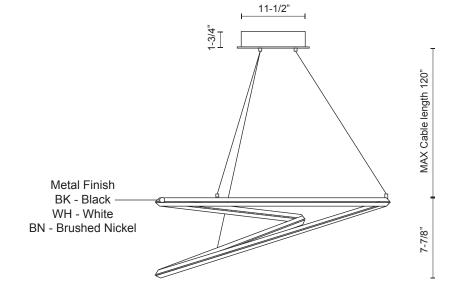





WH - White

BN - Brushed Nickel


Product Descriptions

Extruded and rolled triangular aluminum loop Flexible silicon rubber diffuser Plated and brushed finish or matte powder-coat Up and down light Max. cable length of 120".


Product Details

High system efficacy. Low total life cycle cost. ETL Listed. 5-years warranty. Complete warranty terms located at: www.kuzcolighting.com/warranty

Utilizes our LED Driver Light Engine. LED Driver within canopy. Dimmable with ELV dimmer (not included) Custom options available.



Comments:





T: 604 538 7162 F: 604 538 7196 W: Kuzcolighting.com

