PD22339

Specification Sheet


Pendant



PROJECT		
DATE	TYPE	

Voltage	Watt	LED Lumens	Delivered Lumens	Finish(es)	Color Temp	
120V	90W*	4500lm*	4050lm*	BK - Black	CRI(Ra)	>90
120V	90W*	4500lm*	4050lm*	BN - Brushed Nickel	Dimming	100%-10%
120V	90W*	4500lm*	4050lm*	WH - White	Rated Life	50,000 hours

*Preliminary figures

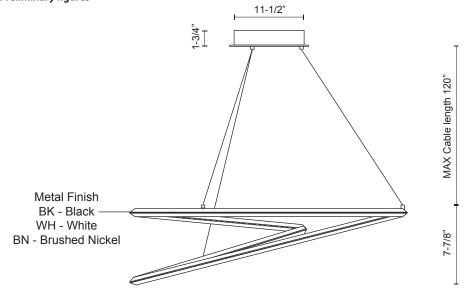



WH - White

BN - Brushed Nickel

Product Descriptions

Extruded and rolled triangular aluminum loop Flexible silicon rubber diffuser Plated and brushed finish or matte powder-coat Up and down light Max. cable length of 120".

Product Details

High system efficacy. Low total life cycle cost. ETL Listed. 5-years warranty.


Complete warranty terms located at: www.kuzcolighting.com/warranty

Utilizes our LED Driver Light Engine.

LED Driver within canopy.

Dimmable with ELV dimmer (not included)

Custom options available.

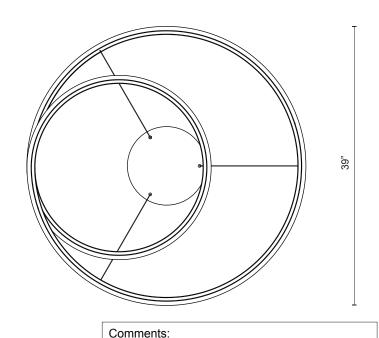

Canopy dimensions: D: 11-1/2", H: 1-3/4"



19054 28th Avenue Surrey, BC, Canada V3Z 6M3

T: 604 538 7162 F: 604 538 7196 W: Kuzcolighting.com

