


PD82560

Specification Sheet


Pendant

PROJECT					
DATE				TYPE	
Voltage	Watt	LED Lumens	Delivered Lumens	Finish(es)	Color Temp 3000K
120V	80W	6800lm	1930lm*	BK - Black	CRI (Ra) >90
120V	80W	6800lm	3405lm*	BN - Brushed Nickel	Dimming 100%-10%
120V	80W	6800lm	3935lm*	WH - White	Rated Life 50,000 hours

*Preliminary figures

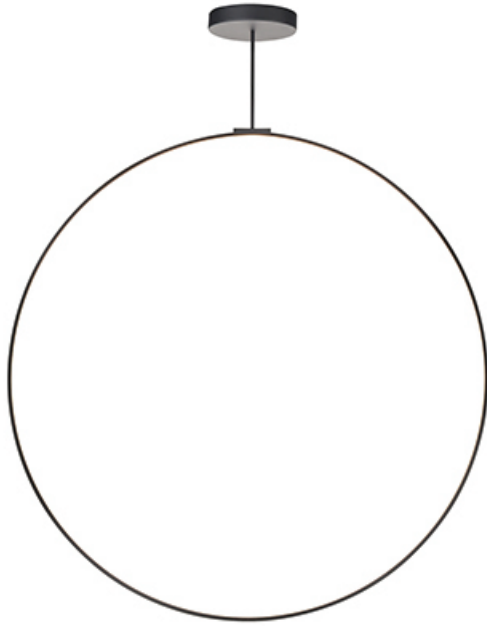

BK - Black





BN - Brushed Nickel



WH - White

Finish
BK - Black
BN - Brushed Nickel
WH - White

11"
1-3/4" H

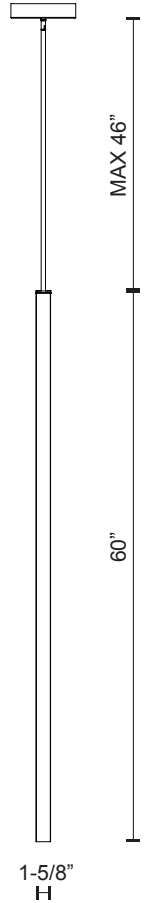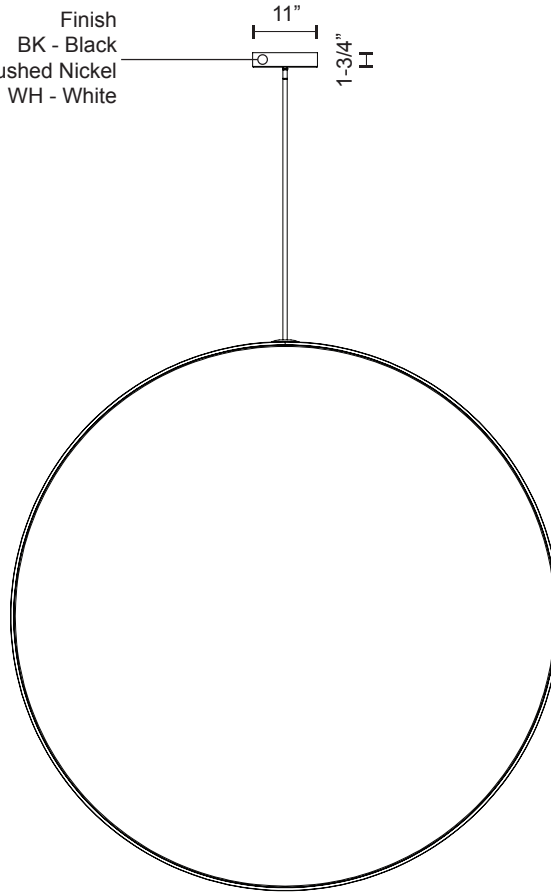

Product Descriptions

Aluminum ring with circular ceiling mount. Circular profile. Flexible silicon-rubber diffuser. Metallic & matte powder-coated finishes. Up and down light. Max. stem length of 46"

Product Details

High system efficacy. Low total life cycle cost. ETL Listed. 5-years warranty.

Complete warranty terms located at:

www.kuzcolighting.com/warranty

Utilizes our LED Driver Light Engine.

LED Driver within fixture.

Dimmable with ELV or TRIAC dimmer (not included).

Custom options available.

Canopy Dimensions:
D11" x H1-3/4"

Comments:

KUZCO

19054 28th Avenue
Surrey, BC, Canada
V3Z 6M3

20190528

T: 604 538 7162
F: 604 538 7196
W: Kuzcolighting.com

