


Cylindrical pendant

These beautiful modern pendants with vertical light strips running along the side create tasteful accents to any interior design, whether in a cluster or standalone. Height adjustable 10-foot cables and flexible switch-selectable color temperatures make these decorative pendants an easy choice. Available in multiple sizes and finishes.



DAMP



COLOR TEMPERATURE



Intertek

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
PDLED120-24	24"	30 W	300 lm	90	3000 K - 3500 K - 4000 K	120 V - 277 V
PDLED120-36	36"	30 W	300 lm	90	3000 K - 3500 K - 4000 K	120 V - 277 V
PDLED120-48	48"	30 W	300 lm	90	3000 K - 3500 K - 4000 K	120 V - 277 V
PDLED120-60	60"	30 W	300 lm	90	3000 K - 3500 K - 4000 K	120 V - 277 V

Specifications

Over 50,000 hours of service life
 Adjustable cable length to 10 feet
 Switch-selectable CCT: 3000 K/3500 K/4000 K inside canopy
 Frosted reflector
 Low power consumption
 Superior color consistency
 Canopy mount on 4" octagon junction box
 Integrated dimmable driver

Compatible with TRIAC, ELV and 0-10 V dimmers
 Suitable for damp locations
 Refer to website for dimmer compatibility
 5-year warranty

Finish

- **BK** Black
- **WH** White


Order example

PDLED120-36-WH
 Dimmable PDLED120-36 36" cylindrical pendant in a white finish


Note

Other Color °T and Finishes available, but may require MOQ's and longer lead times. Please contact your DALs representative for more information.


PDLED120-24

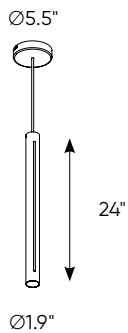


PDLED120-36



PDLED120-48

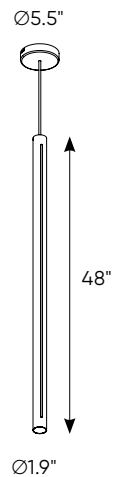

PDLED120-60

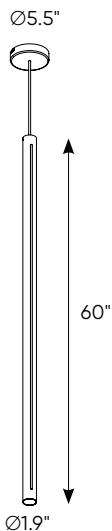


Cylindrical pendant clusters

These beautiful modern pendants with vertical light strips running along the side create tasteful accents to any interior design. Height adjustable 10-foot cables and flexible switch-selectable color temperatures make these decorative pendants an easy choice. Available in multiple sizes and finishes.



DAMP



COLOR TEMPERATURE



Intertek



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
PDLED120-5	Ø22"/5 lights	150 W	1500 lm	90	3000 K - 3500 K - 4000 K	120 V - 277 V
PDLED120-8	Ø26"/8 lights	150 W	1500 lm	90	3000 K - 3500 K - 4000 K	120 V - 277 V
PDLED120-SQ5	47"/5 lights	240 W	2400 lm	90	3000 K - 3500 K - 4000 K	120 V - 277 V
PDLED120-SQ8	84"/8 lights	240 W	2400 lm	90	3000 K - 3500 K - 4000 K	120 V - 277 V

Specifications

Over 50,000 hours of service life
 Individually adjustable cable length up to 10 feet
 Switch-selectable CCT: 3000 K/3500 K/4000 K inside canopy
 Frosted reflector
 Low power consumption
 Superior color consistency
 Canopy mount on 4" octagon junction box
 Integrated dimmable driver
 Compatible with TRIAC, ELV and 0-10 V dimmers
 Suitable for damp locations
 Refer to website for dimmer compatibility
 5-year warranty

Finish

- **BK** Black
- **WH** White


Order example

PDLED120-8-WH
 Dimmable PDLED120-8, Ø26" canopy with 8 clustered cylindrical pendants in a white finish

Note


Other Color °T and Finishes available, but may require MOQ's and longer lead times. Please contact your DALI representative for more information.

PDLED120-5

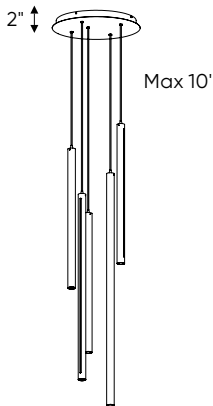


Ø22"

PDLED120-8

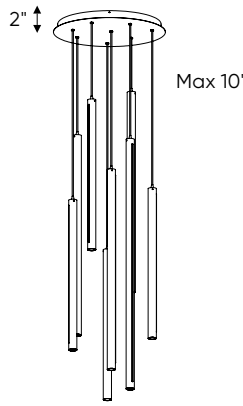


Ø26"

PDLED120-SQ5

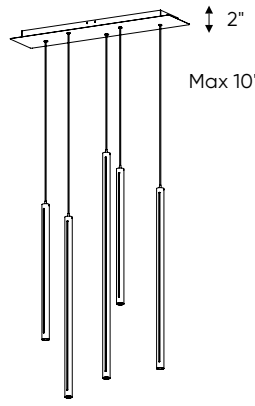

47-5/16" x 11"

PDLED120-SQ8

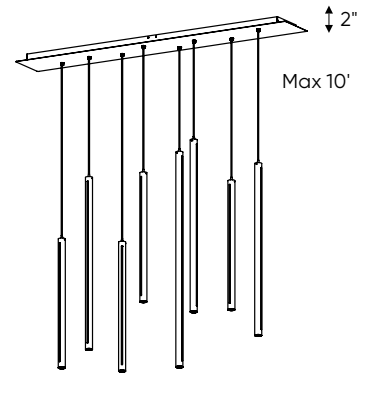

84" x 12"