



CIRRUS FLOAT - CENTER FEED, 120V/24VAC FIXTURE - 92CRI

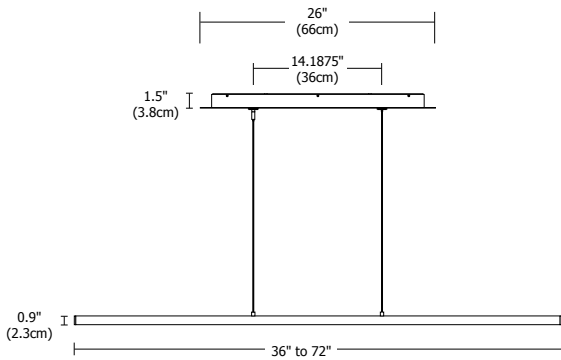

MADE IN THE USA

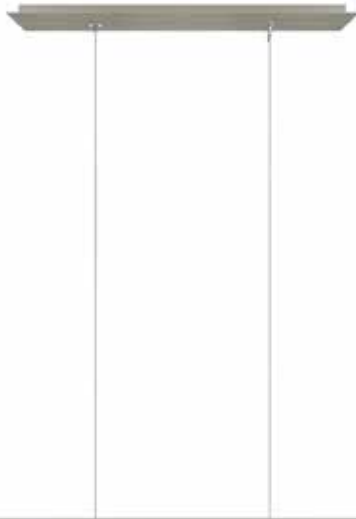

Description:

The Cirrus Float Center Feed features a direct 1" (D1), rectangular 1" (R1) or a tubular 1 1/8" (T1) lens, offering an array of choices for style, functionality and beam distribution. At 7 watts per foot, the 24 volt AC suspension contains very warm white 2,700K or warm white 3,000K 92CRI LEDs and is available in lengths from 36 inches up to 72 inches. Customized lengths available in 2.4" increments. The Cirrus Float includes 26" rectangle canopy and feeds power at the center from a 24 VAC Class 2 electronic low voltage LED transformer (included), which fits inside a standard 4" electrical box with round plaster ring and is dimmable with an electronic low voltage dimmer. All cables and hardware have a satin nickel finish. Fixture is covered by a 5 year warranty. Custom finishes available.

Finish:

Satin Aluminum, Satin Nickel, Chrome, Antique Bronze, White and Black; Custom finishes also available.

Applications:

Indoor - Architectural lighting, general lighting and retail.

Lamp:

Version	Watts per Foot	Lumens per Watt	Lumens per Foot	92CRI 27K, 30K	50,000 Hour Lamp Life
D1	7	34	241	●	●
R1	7	36	262	●	●
T1	7	36	268	●	●



Lumen values are based on the 3000K LED test.

Power Supply:

120V input, 24VAC Class 2 output; electronic low voltage LED transformer (included) that fits inside standard junction box

Dimming

Dimmable with electronic low voltage dimmer. Lutron: Diva #DVELV-300P; Skylark #SELV-300P dimmers recommended

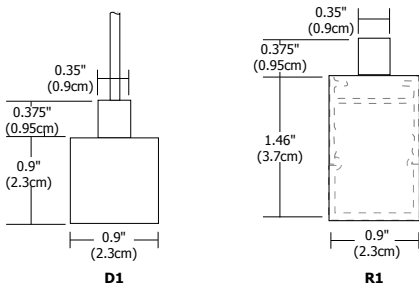

System	Lens	Power Feed	Length in Inches	Color Temperature	Finish
CF	D1	C	72IN	27K	SA
CF Cirrus Float	D1 Direct 1" T1 Tubular 1 1/8" R1 Rectangular 1"	C Center Feed	36 36" 60 60" 48 48" 72 72" Customize in 2.4 inch increments	27K 2,700K Very Warm White 30K 3,000K Warm White	SA Satin Aluminum SN Satin Nickel CH Chrome BZ Antique Bronze BK Black WH White

PROJECT:

FIXTURE TYPE:

DATE: