



15" CLEAR ICE MAKERS
Indoor/Outdoor



| | |
|-----------|--|
| JOB | |
| AREA | |
| ITEM NO. | |
| MODEL NO. | |



H50IMS-R
Stainless Steel Door Model
Hinged right



H50IMS-ADL
Stainless Steel Door Model
Hinged left

SIGNATURE SERIES MODELS

| MODELS | DESCRIPTION |
|-----------------|--|
| H50IMS-L | Solid stainless steel door, hinged left |
| H50IMS-R | Solid stainless steel door, hinged right |
| H50IMW* | Panel ready door, hinged left or right |

ADA-HEIGHT COMPLIANT MODELS

| MODELS | DESCRIPTION |
|-------------------|--|
| H50IMS-ADL | Solid stainless steel door, hinged left |
| H50IMS-ADR | Solid stainless steel door, hinged right |
| H50IMW-AD* | Panel ready door, hinged left or right |


* This unit comes ready to accept customer-provided overlay panel and handle

KEY PRODUCT FEATURES AND BENEFITS

- Produces clear, top hat shaped ice, that is clear of imperfections and prevents ice from clumping like traditional ice makers
- Produces up to 51 lbs. of ice per day with a storage capacity of 22 lbs. ensures you always have fresh ice for gathering of any size
- Easily disassembled all stainless steel ice making surface allows easy cleaning and ensures fresh ice for the life of the machine
- ADA-height compliant models available for accessible and aging in place designs

Quick Features:

- Available with stainless steel or panel ready doors to match your design style – Panel read doors come ready to accept customer-supplied door overlay and handle
- UL-Approved for outdoor use
- Power switch accessible without panel removal
- Ice continually melts and drains to a gravity drain or can be routed to a remote drain with optional drain pump (63802A)



Cube Dimensions




15" CLEAR ICE MAKERS
Indoor/Outdoor




| MODEL NUMBERS | | H50IMS Signature Series | H50IMS-AD ADA-Height Compliant Series |
|------------------------------|-----------------------|--------------------------------------|--|
| OVERALL DIMENSIONS | Width - in. (mm) | 14-7/8" (378mm) | 14-7/8" (378mm) |
| | Depth - in. (mm) | 22-9/16" (573 mm) | 22-9/16" (573 mm) |
| | Height - in. (mm) | 33-1/2" (851 mm) | 31-1/2" (800 mm) |
| OPENING DIMENSIONS | Width - in. (mm) | 15" (381 mm) | 15" (381 mm) |
| | Depth - in. (mm) | 24-7/8" (632 mm) | 24-7/8" (632 mm) |
| | Height - in. (mm) | 34-1/2" | 32-1/4" (819 mm) |
| SHIPPING WEIGHT Lbs. | | 118 lbs (52.16 kb) | 118 lbs (52.16 kb) |
| ELECTRICAL SPECIFICATIONS | Electrical Supply | 115V/60 Hz/1 Ph | 115V/60 Hz/1 Ph |
| | Running Load Amps | 3.4 amps | 3.4 amps |
| | Electrical Connection | Cord connected | Cord connected |
| | Cord Plug Type | NEMA 3 Prong 5-15P | NEMA 3 Prong 5-15P |
| | Cord length | 6.5 ft | 6.5 ft |
| REFRIGERATION SPECIFICATIONS | Refrigerant | R134a | R134a |
| | Plumbing | 1/2" FTP water Inlet, 1/2" FTP Drain | 1/2" FTP water Inlet, 1/2" FTP Drain |
| OPERATING LIMITS | Ambient Temp Range | 45-100F | 45-100F |
| | Water Temp Range | 45-90F | 45-90F |
| | Water Pressure | 7-113 psig | 7-113 psig |
| | Voltage Range | 104-127V | 104-127V |






15" CLEAR ICE MAKERS
Indoor/Outdoor

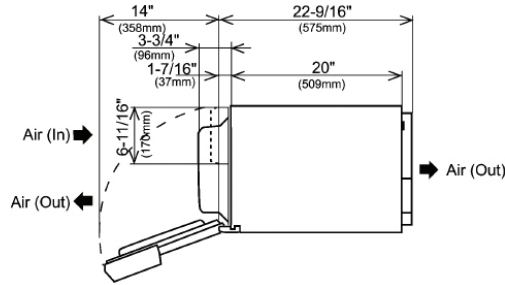

**Top View –
Signature and ADA-Height Compliant Series
Cubelet Ice Makers**

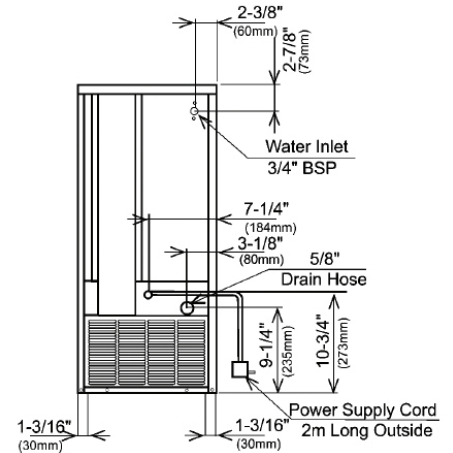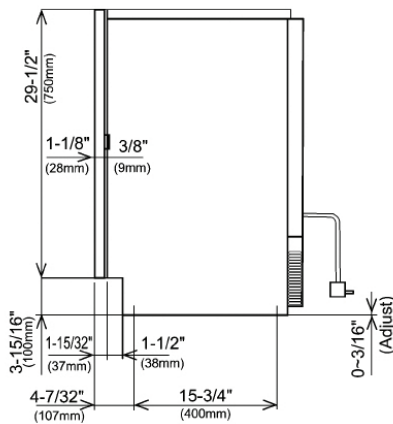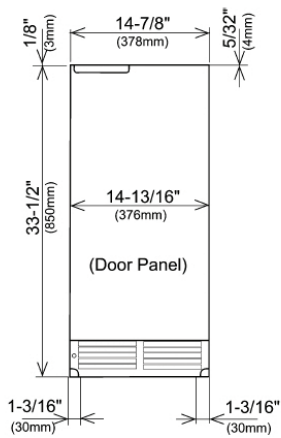

Signature Series Front, Side and Back View

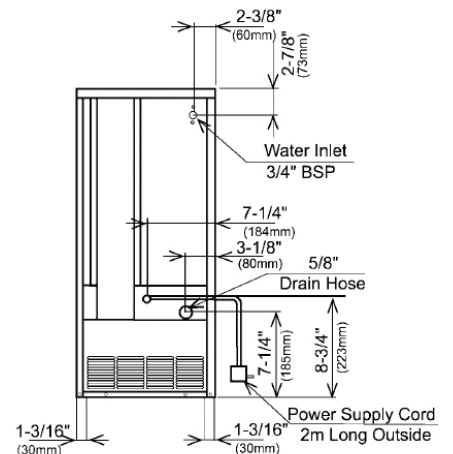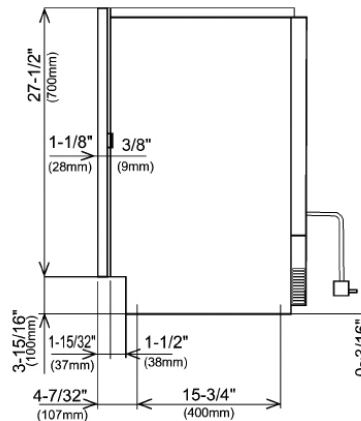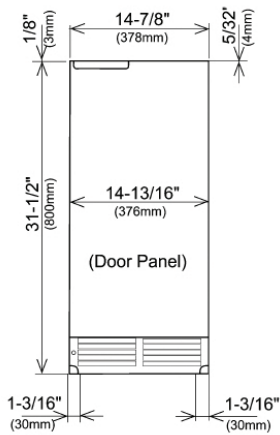

ADA-Height Compliant Series Front, Side and Back View

California Prop 65 Notice:

WARNING: The materials used in this product may contain chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Form No. Z2546
Rev 11.22.2021