

## **SBC696OSTWINTL**



34.25" x 23.75" x 25" (H x W x D)

Outdoor/indoor commercial beer dispenser for built-in or freestanding use, with complete dual tap kit, two TapLocks, digital thermostat, stainless steel door, and black cabinet

## **Highlights:**

Commercially listed to NSF-7 standards

Flexible design allows built-in or freestanding use in 24" spaces

Weatherproof design ensures safe operation in the outdoors

## **Product Features:**

Commercially approved	ETL-S listed to NSF-7 commercial standards and meets UL-471 for use in foodservice settings
Weatherproof design	Solid construction allows placement in the outdoors
Built-in capable	Front-breathing design allows fully recessed installation under counters
Full-sized beer dispenser	Large interior can accept a full half barrel keg, two slim quarter kegs, or up to three sixth barrel or Cornelius style kegs
Complete tap kit	Includes a 5 lb. CO2 tank and regulator, dual tap draft arm, Sankey American tap, connection hardware, and cleaning kit
TapLock included	Two easy to use removable locks allow you to secure each tap's faucet with a key to prevent unsupervised access as needed
Dual tap system	Twin draft tower allows you to serve from two 1/6 (sixtel) sized kegs
Stainless steel door	Wrapped stainless steel door offers a professional look built to hold up to the elements
Professional handle	Blade style handle in brushed stainless steel matches many popular styles of cabinetry and grill details






## **SBC696OSTWINTL Specifications:**

Overview	
Height of Cabinet	34.25" (87 cm)
Width	23.75" (60 cm)
Depth	25.0" (64 cm)
Depth with Handle	26.88" (68 cm)
Depth with door at 90°	47.75" (121 cm)
Capacity	6.04 cu.ft. (171 L)
Defrost Type	Automatic
Door	Stainless Steel
Cabinet	Black
US Electrical Safety	ETL
Canadian Electrical Safety	ETL-C
Sanitation	ETL-S
Amps	1.3
Voltage/Frequency	115 V AC/60 Hz
Weight	108.0 lbs. (49 kg)
Shipping Weight	113.0 lbs. (51 kg)
Parts & Labor Warranty	1 Year
Compressor Warranty	5 Years
UPC	761101084763
Kegerator	
Kegerator Door Swing	RHD
	RHD Yes
Door Swing	
Door Swing Reversible	Yes
Door Swing Reversible Tap Kit	Yes Yes
Door Swing Reversible Tap Kit Height with Tap	Yes Yes 50.38" (128 cm)
Door Swing Reversible Tap Kit Height with Tap Number of Taps	Yes Yes 50.38" (128 cm) 2
Door Swing Reversible Tap Kit Height with Tap Number of Taps Thermostat Type	Yes Yes 50.38" (128 cm) 2 Digital
Door Swing Reversible Tap Kit Height with Tap Number of Taps Thermostat Type Interior Light	Yes Yes 50.38" (128 cm) 2 Digital Yes Interior and
Door Swing Reversible Tap Kit Height with Tap Number of Taps Thermostat Type Interior Light Fan Type	Yes Yes 50.38" (128 cm) 2 Digital Yes Interior and Exterior
Door Swing Reversible Tap Kit Height with Tap Number of Taps Thermostat Type Interior Light Fan Type Refrigerant	Yes Yes 50.38" (128 cm) 2 Digital Yes Interior and Exterior R600a
Door Swing Reversible Tap Kit Height with Tap Number of Taps Thermostat Type Interior Light Fan Type Refrigerant Refrigerant Amount	Yes Yes 50.38" (128 cm) 2 Digital Yes Interior and Exterior R600a 1.76 oz.
Door Swing Reversible Tap Kit Height with Tap Number of Taps Thermostat Type Interior Light Fan Type Refrigerant Refrigerant Amount High Side PSI	Yes Yes 50.38" (128 cm) 2 Digital Yes Interior and Exterior R600a 1.76 oz. 220.0
Door Swing Reversible Tap Kit Height with Tap Number of Taps Thermostat Type Interior Light Fan Type Refrigerant Refrigerant Amount High Side PSI Low Side PSI	Yes Yes Yes 50.38" (128 cm) 2 Digital Yes Interior and Exterior R600a 1.76 oz. 220.0 43.0
Door Swing Reversible Tap Kit Height with Tap Number of Taps Thermostat Type Interior Light Fan Type Refrigerant Refrigerant Amount High Side PSI Low Side PSI Inter Height	Yes Yes Yes 50.38" (128 cm) 2 Digital Yes Interior and Exterior R600a 1.76 oz. 220.0 43.0 27.0" (69 cm)
Door Swing Reversible Tap Kit Height with Tap Number of Taps Thermostat Type Interior Light Fan Type Refrigerant Refrigerant Amount High Side PSI Low Side PSI Inter Height Interior Width	Yes Yes Yes 50.38" (128 cm) 2 Digital Yes Interior and Exterior R600a 1.76 oz. 220.0 43.0 27.0" (69 cm) 20.38" (52 cm)

Compressor Step Depth	2.5" (6 cm)
Wheel Qty	4
Temperature Range	32º to 50ºF

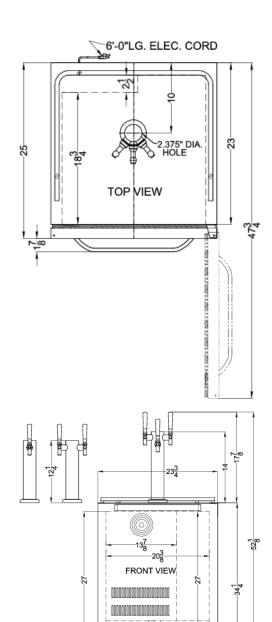



ELEC. CORD