


# User's Manual



## 6" Bluetooth Ceiling Speaker System

### WB-640

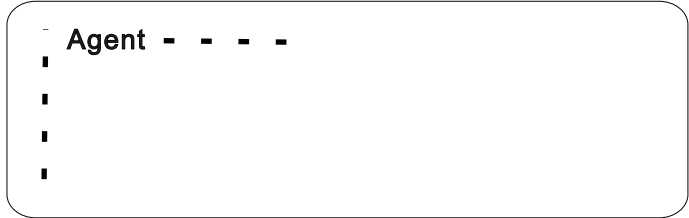

#### WARNING

This symbol indicates that dangerous voltage constituting a risk of electric shock is present within this unit.

This symbol indicates that there are important operating and maintenance instructions in the literature accompanying this unit.

#### 1. FOR OUTDOOR USE:

To reduce the risk of fire or electric shock, do not expose this apparatus to rain or moisture.

#### 2. UNDER WET LOCATION:

Apparatus should not be exposed to dripping or splashing and no objects filled with liquids, such as vases should be placed on the apparatus.

#### 3. SERVICE INSTRUCTIONS:

CAUTION - These servicing instructions are for use by qualified service personnel only. To reduce the risk of electric shock, do not perform any servicing other than that contained in the operating instructions unless you are qualified to do so.



[precisionaudio.com.au](http://precisionaudio.com.au)

Specifications are subject to be changed without notice.

# User's Manual

## Bluetooth Device : BT Speaker 1

Password : 1111

### Features:

- Adopt 4.2 +BR+EDR+BLE Bluetooth technology
- 16bit DAC Digital Audio Processor
- Support analog stereo signal input
- Built-in high efficiency class D amplifier
- Adopt high quality speaker drivers
- Designed for fast installation and easy operation

### Specification:

<b>Model No.</b>	WB-640
<b>Rated Power</b>	4*30W
<b>Speaker Impedance</b>	4Ω
<b>SPL (1W/1M)</b>	93dB
<b>Frequency Response</b>	70~20KHz
<b>Input Sensitivity</b>	400MV
<b>Input Level</b>	> 200MV
<b>S/N Ratio</b>	90dB
<b>AC Power Supply</b>	AC110V-240V 50Hz\60Hz
<b>BT Transmission Distance</b>	≤ 10M
<b>Enclosure Material</b>	ABS, Iron (Grille)
<b>Speaker Driver</b>	6" Woofer, 1" Tweeter
<b>Net Weight</b>	1 Kg
<b>Product Szie</b>	φ203*70mm
<b>Cut Size</b>	φ170mm
<b>Color</b>	White RAL 9010




MADE IN CHINA




# User's Manual

## Connection Diagram CB -215 CB -215T :

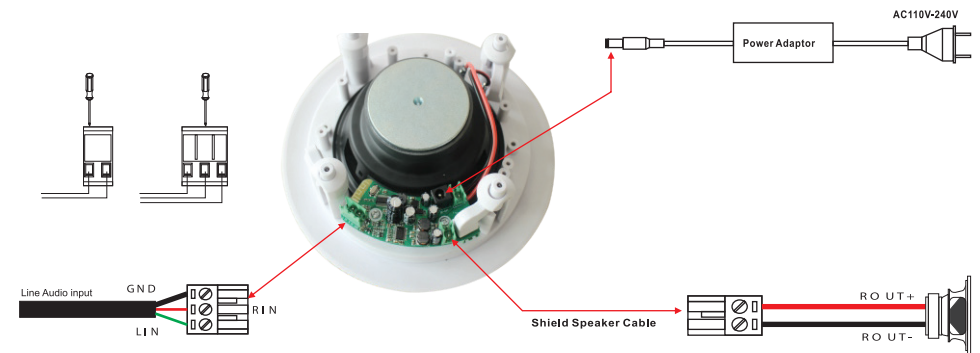

## Connection Diagram CB -415 WB-640 :

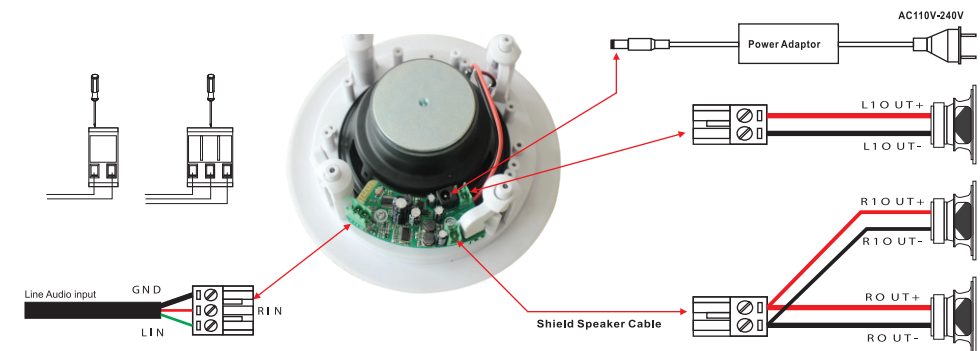

## Installation:

