




Full Range Professional Speaker


User Manual



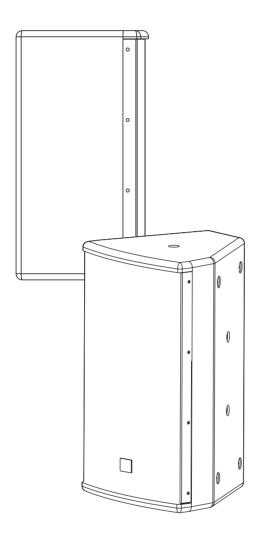

Features:


One 8" high power low frequency driver
One 1R PEI diaphragm compression driver
Passive configuration
140o x 140o wide angle coverage pattern
Computer aided design to optimise frequency
and phase response
Multi purpose cabinet design for FOH or
monitor use
Use as a main system with or without subwoofer
augmentation.
Suitable for speech (meeting and conference rooms)
background music (bars and other public spaces)
Flexible and easy-to-install configurations (wall,
ceiling, under balcony)
U Bracket included
35mm Stand Adapter included

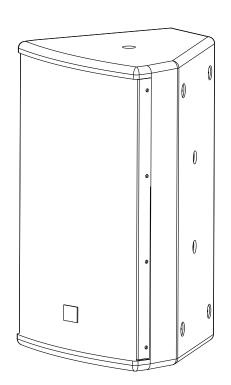



Specifications:


Fequency Response(-3dB):	85Hz-19kHz
Sensitivity(1W/1m):	93dB
Crossover Frequency:	2.5kHz
Dispersion(H×V):	140°×140°
Rated Power(RMS):	100W
Rated Impedance:	8Ω
DC Impedance:	5.6Ω
THD:	<3 %
Input Connectors:	NL4×1,1+ 1-
Net Weight(1Pc):	8.0kg
Gross Weight(1Pair):	19.0kg
Dimensions (W \times D \times H):	258×247×408mm
Packaging Dimensions 2ncs/pack(W×D×H)	622×342×513mm

Cabinet Dimension:









Installation:

