
SOVIS



Full Range Professional Speaker

User Manual



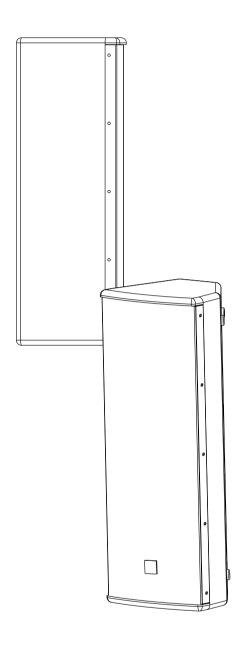


Features:


Two 6" high power low frequency driver	
One 1" PEI diaphragm compression driver	
Passive configuration	
140o x 140o wide angle coverage pattern	
Computer aided design to optimise frequency	
and phase response	
Multi purpose cabinet design for FOH or monitor use	
Use as a main system with or without subwoofer augmentation.	
Suitable for speech (meeting and conference rooms),	
background music (bars and other public spaces)	
Flexible and easy-to-install configurations (wall, ceiling,	
under balcony)	
U Bracket included	
35mm Stand Adapter included	


Specifications:


Fequency Response(-3dB):	70Hz-18kHz
Sensitivity(1m/1W):	93dB
Crossover Frequency:	3KHz
Dispersion(H $ imes$ V):	140° ×140°
Rated Power(RMS):	160W
Rated Impedance:	8 Ohm
DC Impedance:	6.4 Ohm
THD:	<3%
Input Connectors:	NL4×1
Net Weight(1Pc):	9.5kg
Gross Weight(1Pair):	22.5kg
Dimensions (W \times D \times H):	212×194×541mm
Packaging Dimensions $2pcs/pack(W \times D \times H)$:	636×546×308mm

Cabinet Dimension:









Installation:

