

Dual Point Booster Data Sheet Bottom Entry

Certified to AS/NZS 2419.3


- » High Strength, Premium Quality Dual Booster Assembly
- » Stainless Steel Booster Body, Inlet Connection, Seating Disc, Spring, Drain Valve & Pressure Gauge
- » High Corrosion Resistance
- » Oil Filled Pressure Gauge
- » Long Service Life
- » Comes with Pressure Gauge, Drain Valve, Dust Cap & Chain
- » Class PN 21 High pressure booster valve
- » Fully Tested and Approved to AS2419.3-2012



Stock Code	Body Type	Inlet Connection	Height	Width	Weight
TBRG100-BOTTOM	Dual Booster - Rear outlet	65mm STORTZ	250mm	343mm	7.2kg

Material	
» Booster Body	Stainless Steel Grade 304
» Inlet Connection	Stainless Steel Grade 304/Forged Alloy for Stortz model
» Pressure Gauge	Stainless Steel Grade 304 with oil filled
» Drain Valve	Stainless Steel Grade 304
» Disc Facing	NBR Rubber
» Blank Cap	UV Stabilized Plastic

Working Pressure	Maximum Working Pressure	Onsite Test Pressure
2,100 kPa	2,650 kPa	3,150 kPa

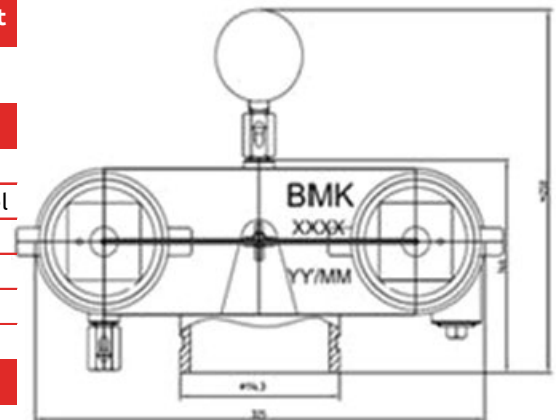

A 1/32 Stennett Road, Ingleburn NSW 2565
P (02) 9618 7666
E sales@ausfiregroup.com.au
W ausfiregroup.com.au