

Flower Spectrum



450 Watt - 24" x 18" x 6", 20 lbs



600 Watt - 24" x 22" x 6", 22 lbs

Aegis Series S2

450W or 600W

SYSTEM SPECIFICATIONS

Grow-It-LED's S2 Flower Spectrum offers both high efficiency warm and cool white diodes coupled with 660nm red for proper plant physiological growth. See spectral distribution page for more information on this spectrum's performance characteristics

DIMMING & CONTROLS

0-10v manual dimming by potentimeter dial or 0-10v wireless dimming with Casambi system for smart phone. Casambi wireless system includes scheduling and daily light integral capabilities.

CONSTRUCTION

Robust aluminum housing for durability, custom built heatsink for optimal heat dissipation, cooling fans for increased LED performance and extended life, manual on-off switch, internal power quick disconnect, internal disc thermister for heat protection.

MOUNTING

Eye bolts for cable or chain attachment (standard). 4 point rachet cables or Gripple Y-Fit toggle cables purchased separately.

RATINGS & WARRANTY

Temperature rated from - 40°F to 95°F, service life > 100,000 hours (L90), built to UL 1598 standard, BAA & RoHS compliant. 5 year product warranty. Consult factory for extended warranties.

Ordering Information

AEG	S2					
Series	Spectrum	Power	Voltage	Dimming (Optional)	Cord & Plug	Housing Color
Aegis Series	Flower	L = Low (450W)	U = Universal	MDC = Manual	C? = Cord	WH = White
	Spectrum	H = High (600W)	(120-277v)	Dimming Control Potentiometer Dial	? = Specify Length	BK = Black
					P? = Plug	Consult Factory
				WDC = Wireless	? = Specify NEMA Type	For Custom Colors
				Dimming Control		
				Casambi		


Mounting Accesoies

Custom Options

4PR = 4 Point Rachet Cables
GRP = Gripple Y Fit Cables

Grow-It-LED offers an assortment of custom options ranging from unique fan colors, housing colors, branding logos, custom mounting, controls for spectrum tuning and more. We are open to new ideas and encourage our customers to show their creative spirit



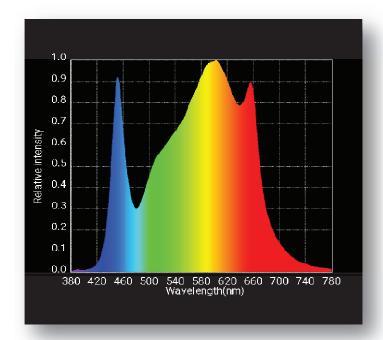



Shield Series S2 Flower Spectrum

Technical Information	450 Watt	600 Watt	
	120v = 3.78A	120v = 5.15A	
Operating Voltage and Current	277v = 1.64A	277v = 2.23A	
Operating Voltage and Current	347v = 1.31A	347v = 1.78A	
	480v = .95A	480v = 1.3A	
Cooling Fan Power Draw	12w	15w	
LED Power Draw	439w	603w	
Fixture PPF (380-780nm) umol/s	1133	1459	
Total Power Draw	451w	618w	
Heat Output (BTU)	1549.11	2108.7	
Efficiency umol/J	2.4	2.4	
Driver Efficiency	95%		
Warranty	5 Years		
Dimensions	25.20"L x 21.95"W x 4.47"H	25.20"L x 21.95"W x 4.47"H	
Weight	25 lbs	30 lbs	

Spectrum Information	450 Watt	600 Watt
TOTAL 380nm - 850nm umol/s	1133	1459
Blue 400nm - 499nm umol/s	162.7	217.2
Red 600nm - 699nm umol/s	476.47	612.3
FarRed 700nm - 759nm umol/s	29.04	36.12

All information provided is subject to change. Check our website or contact us for updated information.